



US011606981B2

(12) **United States Patent**
Verleur et al.

(10) **Patent No.:** **US 11,606,981 B2**
(45) **Date of Patent:** ***Mar. 21, 2023**

(54) **VAPORIZER**

(58) **Field of Classification Search**

(71) Applicant: **VMR Products LLC**, San Francisco, CA (US)

None
See application file for complete search history.

(72) Inventors: **Jan Andries Verleur**, Miami, FL (US); **Dan Recio**, Miami Beach, FL (US); **Yifeng Lu**, Miami, FL (US); **Yinjun Zhang**, Miami, FL (US); **Arturo Fajardo**, Miami, FL (US); **Hans Verleur**, El Dorado, CA (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,085,145 A 4/1963 Wray, Jr.
3,918,451 A 11/1975 Steil
(Continued)

(73) Assignee: **VMR Products LLC**, San Francisco, CA (US)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 18 days.

AU 2014208287 B2 12/2016
AU 2017202891 B2 5/2019
(Continued)

This patent is subject to a terminal disclaimer.

OTHER PUBLICATIONS

Uptoyou Fromeme, "Newest Elips CCV Pure Flat Shaped Rechargeable Double Electronic Cigarettes E-Cigarette Set," YouTube Video published on Sep. 11, 2013, <https://www.youtube.com/watch?v=ZkQe9xztu44> (year 2013).

(Continued)

(21) Appl. No.: **17/095,567**

(22) Filed: **Nov. 11, 2020**

(65) **Prior Publication Data**
US 2021/0120871 A1 Apr. 29, 2021

Related U.S. Application Data

(63) Continuation of application No. 14/201,267, filed on Mar. 7, 2014, now Pat. No. 10,980,273, which is a
(Continued)

Primary Examiner — Eric Yaary

(74) *Attorney, Agent, or Firm* — Mintz Levin Cohn Ferris Glovsky and Popeo, P.C.


(51) **Int. Cl.**
A24F 47/00 (2020.01)
A24F 40/90 (2020.01)
(Continued)

(57) **ABSTRACT**

Vaporizer and/or electronic cigarette chargers useful for the recharging of rechargeable vaporizer or electronic cigarette power supplies such as batteries, compatible vaporizers and/or electronic cigarettes, their components, charging contacts, methods of their use and kits containing such chargers are disclosed.

(52) **U.S. Cl.**
CPC **A24F 40/90** (2020.01); **A24F 40/00** (2020.01); **A24F 40/40** (2020.01); **A24F 40/42** (2020.01);
(Continued)

18 Claims, 18 Drawing Sheets

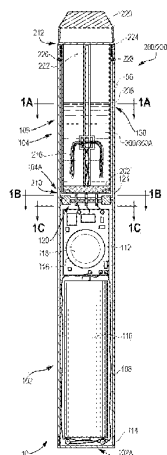

Related U.S. Application Data

continuation of application No. 14/196,729, filed on Mar. 4, 2014, now Pat. No. 10,039,321.

- (60) Provisional application No. 61/937,851, filed on Feb. 10, 2014, provisional application No. 61/903,344, filed on Nov. 12, 2013.

(51) **Int. Cl.**

A61M 15/06 (2006.01)
A61M 11/04 (2006.01)
H02J 7/00 (2006.01)
A24F 40/40 (2020.01)
A24F 40/00 (2020.01)
A24F 40/44 (2020.01)
A24F 40/42 (2020.01)
A24F 40/50 (2020.01)
A61M 15/00 (2006.01)
A24F 40/10 (2020.01)
A24F 40/20 (2020.01)
A24F 40/53 (2020.01)

(52) **U.S. Cl.**

CPC *A24F 40/44* (2020.01); *A24F 40/50* (2020.01); *A61M 11/042* (2014.02); *A61M 15/06* (2013.01); *H02J 7/00* (2013.01); *H02J 7/0042* (2013.01); *A24F 40/10* (2020.01); *A24F 40/20* (2020.01); *A24F 40/53* (2020.01); *A61M 15/0021* (2014.02); *A61M 2205/07* (2013.01); *A61M 2205/332* (2013.01); *A61M 2205/3368* (2013.01); *A61M 2205/3633* (2013.01); *A61M 2205/3653* (2013.01); *A61M 2205/502* (2013.01); *A61M 2205/584* (2013.01); *A61M 2205/6027* (2013.01); *A61M 2205/6081* (2013.01); *A61M 2205/8206* (2013.01); *A61M 2205/8237* (2013.01); *A61M 2206/20* (2013.01); *A61M 2209/06* (2013.01); *H02J 7/0048* (2020.01)

(56)

References Cited**U.S. PATENT DOCUMENTS**

3,934,117 A 1/1976 Schladitz
 4,171,000 A 10/1979 Uhle
 4,745,705 A 5/1988 Yamamoto et al.
 4,771,796 A 9/1988 Myer
 4,793,365 A 12/1988 Sensabaugh, Jr. et al.
 4,811,731 A 3/1989 Newell et al.
 4,848,374 A 7/1989 Chard et al.
 4,941,236 A 7/1990 Sherman et al.
 4,947,874 A 8/1990 Brooks et al.
 4,947,875 A 8/1990 Brooks et al.
 4,972,855 A 11/1990 Kuriyama et al.
 4,993,436 A 2/1991 Bloom, Jr.
 5,042,509 A 8/1991 Banerjee et al.
 5,117,482 A 5/1992 Hauber
 5,144,962 A 9/1992 Counts et al.
 5,261,424 A 11/1993 Sprinkel, Jr.
 5,269,327 A 12/1993 Counts et al.
 5,479,948 A 1/1996 Counts et al.
 5,666,977 A 9/1997 Higgins et al.
 5,682,050 A 10/1997 Williams
 5,865,185 A 2/1999 Collins et al.
 6,090,082 A 7/2000 King et al.
 6,155,268 A 12/2000 Takeuchi
 6,322,268 B1 11/2001 Kaufmann et al.
 6,443,146 B1 9/2002 Voges
 6,516,796 B1 2/2003 Cox et al.
 6,532,965 B1 3/2003 Abhulimen et al.
 6,708,846 B1 3/2004 Fuchs et al.
 6,772,756 B2 8/2004 Shayan

7,173,222 B2 2/2007 Cox et al.
 7,318,435 B2 1/2008 Pentafragas
 D590,990 S 4/2009 Hon
 7,726,320 B2 6/2010 Robinson et al.
 7,802,569 B2 9/2010 Yeates et al.
 7,913,688 B2 3/2011 Cross et al.
 8,205,622 B2 6/2012 Pan
 8,251,060 B2 8/2012 White et al.
 D675,777 S 2/2013 Wu
 8,365,742 B2 2/2013 Hon
 8,371,310 B2 2/2013 Brenneise
 D688,415 S 8/2013 Kim
 8,522,776 B2 9/2013 Wright et al.
 8,578,942 B2 11/2013 Schennum
 8,689,805 B2 4/2014 Hon
 8,714,161 B2 5/2014 Liu
 8,752,545 B2 6/2014 Buchberger
 8,794,231 B2 8/2014 Thorens et al.
 8,869,792 B1 10/2014 Lee
 D718,492 S 11/2014 Albanese
 8,881,737 B2 11/2014 Collett et al.
 8,893,726 B2 11/2014 Hon
 8,899,240 B2 12/2014 Mass
 8,910,639 B2 12/2014 Chang et al.
 8,948,578 B2 2/2015 Buchberger
 8,955,522 B1 2/2015 Bowen et al.
 8,978,663 B2 3/2015 Newton
 8,991,402 B2 3/2015 Bowen et al.
 9,010,335 B1 4/2015 Scatterday
 9,055,770 B2 6/2015 Liu
 9,072,321 B2 7/2015 Liu
 9,072,322 B2 7/2015 Liu
 9,078,472 B2 7/2015 Liu
 9,078,474 B2 7/2015 Thompson
 9,078,475 B2 7/2015 Li et al.
 9,089,168 B2 7/2015 Liu
 9,095,175 B2 8/2015 Terry et al.
 9,101,729 B2 8/2015 Liu
 9,113,659 B2 8/2015 Liu
 9,220,302 B2 12/2015 DePiano et al.
 9,220,303 B2 12/2015 Li et al.
 D750,320 S 2/2016 Verleur et al.
 9,247,773 B2 2/2016 Memari et al.
 9,254,007 B2 2/2016 Liu
 D750,835 S 3/2016 Wei
 D752,280 S 3/2016 Verleur et al.
 9,277,768 B2 3/2016 Xiu
 9,289,014 B2 3/2016 Tucker et al.
 9,308,336 B2 4/2016 Newton
 9,315,890 B1 4/2016 Frick et al.
 9,326,547 B2 5/2016 Tucker et al.
 9,345,541 B2 5/2016 Greeley et al.
 9,351,522 B2 5/2016 Safari
 9,364,800 B2 6/2016 Dubief
 9,380,812 B2 7/2016 Chung
 9,386,805 B2 7/2016 Liu
 9,420,829 B2 8/2016 Thorens et al.
 9,420,831 B2 8/2016 Liu
 9,423,152 B2 8/2016 Ampolini et al.
 9,439,456 B2 9/2016 Liu
 9,456,633 B2 10/2016 Liu
 9,498,588 B2 11/2016 Benassayag et al.
 9,504,279 B2 11/2016 Chen
 9,516,898 B2 12/2016 Liu
 9,526,272 B2 12/2016 Liu
 9,532,601 B2 1/2017 Liu
 9,555,203 B2 1/2017 Terry et al.
 9,578,898 B2 2/2017 Liu
 9,591,876 B2 3/2017 Alima
 9,603,390 B2 3/2017 Li et al.
 9,609,893 B2 4/2017 Novak, III et al.
 9,615,607 B2 4/2017 Liu
 9,622,511 B2 4/2017 Zhu
 9,629,391 B2 4/2017 Dube et al.
 9,629,394 B2 4/2017 Aronie et al.
 9,642,397 B2 5/2017 Dai et al.
 9,675,114 B2 6/2017 Timmermans
 9,675,117 B2 6/2017 Li et al.
 9,687,027 B2 6/2017 Poston et al.

US 11,606,981 B2

Page 3

(56)	References Cited		2013/0056013	A1	3/2013	Terry et al.	
	U.S. PATENT DOCUMENTS		2013/0087160	A1	4/2013	Gherghe	
			2013/0104916	A1	5/2013	Bellinger et al.	
			2013/0168880	A1	7/2013	Duke	
	9,687,029	B2	2013/0174842	A1	7/2013	Young et al.	
	9,717,275	B2	2013/0182421	A1	7/2013	Popper et al.	
	9,717,276	B2	2013/0192617	A1*	8/2013	Thompson	A24F 40/44
	9,723,874	B2					131/329
	9,723,875	B2	2013/0192623	A1	8/2013	Tucker et al.	
	9,730,471	B2	2013/0213420	A1	8/2013	Hon	
	9,738,622	B2	2013/0220315	A1	8/2013	Conley et al.	
	9,743,691	B2	2013/0228191	A1	9/2013	Newton	
	9,781,953	B2	2013/0253433	A1	9/2013	Senior et al.	
	9,795,168	B2	2013/0255675	A1	10/2013	Liu	
	9,801,413	B2	2013/0255702	A1	10/2013	Griffith, Jr. et al.	
	9,814,263	B2	2013/0284194	A1	10/2013	Newton	
	9,814,265	B2	2013/0288081	A1	10/2013	Cheng et al.	
	9,820,508	B2	2013/0298905	A1	11/2013	Levin et al.	
	9,844,234	B2	2013/0306084	A1	11/2013	Flick	
	9,861,135	B2	2013/0312742	A1	11/2013	Monsees et al.	
	9,918,496	B2	2013/0319431	A1	12/2013	Cyphert et al.	
	9,974,743	B2	2013/0319435	A1	12/2013	Flick	
	9,986,762	B2	2013/0323941	A1	12/2013	Zeliff et al.	
	9,999,250	B2	2013/0333711	A1	12/2013	Liu	
	10,039,321	B2	2014/0000638	A1	1/2014	Sebastian et al.	
	10,058,122	B2	2014/0014124	A1	1/2014	Glasberg et al.	
	10,058,124	B2	2014/0034071	A1*	2/2014	Levitz	A61M 15/06
	10,085,481	B2					131/329
	10,111,467	B1	2014/0041655	A1	2/2014	Barron et al.	
	10,143,233	B2	2014/0053856	A1	2/2014	Liu	
	10,195,370	B2	2014/0053857	A1	2/2014	Liu	
	2002/0043262	A1	2014/0060552	A1	3/2014	Cohen	
	2002/0078951	A1	2014/0060556	A1	3/2014	Liu	
	2002/0088469	A1	2014/0076310	A1	3/2014	Newton	
	2003/0226837	A1	2014/0096781	A1	4/2014	Sears et al.	
	2004/0050382	A1	2014/0096782	A1	4/2014	Ampolini et al.	
	2005/0016550	A1	2014/0123989	A1	5/2014	LaMothe	
	2005/0134215	A1	2014/0150783	A1	6/2014	Liu	
	2007/0045288	A1	2014/0150784	A1	6/2014	Liu	
	2007/0074734	A1	2014/0150785	A1	6/2014	Malik et al.	
	2007/0229025	A1	2014/0158129	A1	6/2014	Pratt, Jr. et al.	
	2007/0277816	A1	2014/0166030	A1	6/2014	Li et al.	
	2007/0283972	A1	2014/0174458	A1	6/2014	Katz	
	2008/0023003	A1	2014/0182610	A1	7/2014	Liu	
	2008/0029095	A1	2014/0182612	A1	7/2014	Chen	
	2008/0257367	A1	2014/0190477	A1	7/2014	Qiu	
	2008/0302374	A1	2014/0190496	A1	7/2014	Wensley et al.	
	2009/0095287	A1	2014/0202454	A1	7/2014	Buchberger	
	2009/0133691	A1	2014/0209109	A1	7/2014	Larson	
	2009/0272379	A1	2014/0216484	A1	8/2014	Liu	
	2009/0293892	A1	2014/0224244	A1	8/2014	Liu	
	2009/0302019	A1	2014/0230835	A1	8/2014	Saliman	
	2010/0031968	A1	2014/0253144	A1	9/2014	Novak, III et al.	
	2010/0194337	A1	2014/0261487	A1	9/2014	Chapman et al.	
	2010/0200008	A1	2014/0261488	A1	9/2014	Tucker	
	2010/0207576	A1	2014/0261490	A1	9/2014	Kane	
	2010/0253279	A1	2014/0261492	A1	9/2014	Kane et al.	
	2011/0036346	A1	2014/0261493	A1	9/2014	Smith et al.	
	2011/0159705	A1	2014/0261499	A1	9/2014	Hon	
	2011/0192397	A1	2014/0270729	A1	9/2014	DePiano et al.	
	2011/0226236	A1	2014/0270730	A1	9/2014	DePiano et al.	
	2011/0226266	A1	2014/0283823	A1	9/2014	Liu	
	2011/0265806	A1	2014/0283859	A1	9/2014	Minskoff et al.	
	2011/0277761	A1	2014/0290677	A1	10/2014	Liu	
	2011/0278189	A1	2014/0299137	A1	10/2014	Kieckbusch et al.	
	2011/0303231	A1	2014/0299141	A1	10/2014	Flick	
	2012/00118529	A1	2014/0311503	A1	10/2014	Liu	
	2012/0048266	A1	2014/0332019	A1*	11/2014	Liu	A24F 40/50
	2012/0174914	A1					392/404
	2012/0199146	A1	2014/0332022	A1	11/2014	Li et al.	
	2012/0199663	A1	2014/0334802	A1	11/2014	Dubief	
	2012/0223673	A1	2014/0334803	A1	11/2014	Li et al.	
	2012/0255546	A1	2014/0334804	A1	11/2014	Choi	
	2012/0312313	A1	2014/0338685	A1	11/2014	Amir	
	2012/0318882	A1	2014/0345631	A1	11/2014	Bowen et al.	
	2012/0325227	A1	2014/0353856	A1	12/2014	Dubief	
	2013/0014772	A1	2014/0355969	A1	12/2014	Stern	
	2013/0037041	A1	2014/0360516	A1	12/2014	Liu	
	2013/0042865	A1	2014/0366896	A1	12/2014	Li et al.	

(56)

References Cited

U.S. PATENT DOCUMENTS

2014/0366898	A1	12/2014	Monsees et al.	2015/0289565	A1	10/2015	Cadieux et al.
2014/0373833	A1	12/2014	Liu	2015/0296885	A1	10/2015	Liu
2014/0376895	A1	12/2014	Han	2015/0296888	A1	10/2015	Liu
2015/0007836	A1	1/2015	Li et al.	2015/0296889	A1	10/2015	Liu
2015/0013695	A1	1/2015	McNeal et al.	2015/0305407	A1	10/2015	Li et al.
2015/0020825	A1	1/2015	Galloway et al.	2015/0305409	A1	10/2015	Verleur et al.
2015/0020831	A1	1/2015	Weigensberg et al.	2015/0313282	A1	11/2015	Ademe et al.
2015/0020832	A1 *	1/2015	Greim A24F 40/65 131/329	2015/0313283	A1	11/2015	Collett et al.
2015/0027457	A1	1/2015	Janardhan et al.	2015/0320116	A1	11/2015	Bleloch et al.
2015/0027460	A1	1/2015	Liu	2015/0327596	A1	11/2015	Alarcon et al.
2015/0027471	A1	1/2015	Feldman et al.	2015/0333552	A1	11/2015	Alarcon
2015/0034103	A1	2/2015	Hon	2015/0333561	A1	11/2015	Alarcon
2015/0034104	A1	2/2015	Zhou	2015/0335071	A1	11/2015	Brinkley et al.
2015/0040929	A1	2/2015	Hon	2015/0335075	A1	11/2015	Minskoff et al.
2015/0047658	A1	2/2015	Cyphert et al.	2015/0342255	A1	12/2015	Wu
2015/0053220	A1	2/2015	Levy et al.	2015/0351454	A1	12/2015	Huang
2015/0059783	A1	3/2015	Liu	2015/0351455	A1	12/2015	Liu
2015/0059787	A1	3/2015	Qiu	2015/0351456	A1	12/2015	Johnson et al.
2015/0083147	A1	3/2015	Schiff et al.	2015/0357608	A1	12/2015	Huang
2015/0090253	A1	4/2015	Farrow	2016/0000147	A1	1/2016	Li et al.
2015/0090256	A1	4/2015	Chung	2016/0007653	A1	1/2016	Tu
2015/0090278	A1	4/2015	Schiff et al.	2016/0015082	A1	1/2016	Liu
2015/0090281	A1	4/2015	Chen	2016/0021933	A1	1/2016	Thorens et al.
2015/0091501	A1	4/2015	Claudepierre	2016/0029697	A1	2/2016	Shafer
2015/0101625	A1	4/2015	Newton et al.	2016/0029699	A1	2/2016	Li et al.
2015/0101626	A1	4/2015	Li et al.	2016/0044962	A1	2/2016	Thorens et al.
2015/0118895	A1	4/2015	Zheng et al.	2016/0044965	A1	2/2016	Liu
2015/0128967	A1	5/2015	Robinson et al.	2016/0044966	A1	2/2016	Li et al.
2015/0128976	A1	5/2015	Verleur et al.	2016/0051716	A1	2/2016	Wheelock
2015/0128977	A1	5/2015	Li et al.	2016/0057811	A1	2/2016	Alarcon et al.
2015/0136158	A1	5/2015	Stevens et al.	2016/0058074	A1	3/2016	Liu
2015/0144145	A1	5/2015	Chang et al.	2016/0073690	A1	3/2016	Liu
2015/0144147	A1	5/2015	Li et al.	2016/0073694	A1	3/2016	Liu
2015/0150305	A1	6/2015	Shenkal	2016/0081395	A1	3/2016	Thorens et al.
2015/0150307	A1	6/2015	Liu	2016/0095352	A1	4/2016	Liu
2015/0157054	A1	6/2015	Liu	2016/0106936	A1	4/2016	Kimmel
2015/0157055	A1	6/2015	Lord	2016/0113326	A1	4/2016	Li et al.
2015/0164138	A1	6/2015	Liu	2016/0120226	A1	5/2016	Rado
2015/0164141	A1	6/2015	Newton	2016/0128384	A1	5/2016	Luciani et al.
2015/0164142	A1	6/2015	Li et al.	2016/0128388	A1	5/2016	Liu
2015/0164146	A1	6/2015	Li et al.	2016/0143365	A1	5/2016	Liu
2015/0164147	A1	6/2015	Verleur et al.	2016/0150824	A1	6/2016	Memari et al.
2015/0173422	A1	6/2015	Liu	2016/0157523	A1	6/2016	Liu
2015/0181930	A1 *	7/2015	Liu A24F 40/40 131/329	2016/0198767	A1	7/2016	Verleur
2015/0181940	A1	7/2015	Liu	2016/0198768	A1	7/2016	Liu
2015/0181943	A1	7/2015	Li et al.	2016/0198770	A1	7/2016	Alarcon
2015/0181944	A1	7/2015	Li et al.	2016/0205999	A1	7/2016	Liu
2015/0189918	A1	7/2015	Liu	2016/0219938	A1	8/2016	Mamoun et al.
2015/0189919	A1	7/2015	Liu	2016/0242463	A1	8/2016	Liu
2015/0201674	A1	7/2015	Dooley et al.	2016/0242466	A1	8/2016	Lord et al.
2015/0208728	A1	7/2015	Lord	2016/0249682	A1	9/2016	Leadley et al.
2015/0208730	A1	7/2015	Li et al.	2016/0270442	A1	9/2016	Liu
2015/0216234	A1	8/2015	Chung	2016/0270446	A1	9/2016	Shenkal et al.
2015/0216237	A1	8/2015	Wensley et al.	2016/0278435	A1	9/2016	Choukroun et al.
2015/0217068	A1	8/2015	Wakalopoulos	2016/0278436	A1	9/2016	Verleur et al.
2015/0223521	A1	8/2015	Menting et al.	2016/0286865	A1	10/2016	King et al.
2015/0223522	A1	8/2015	Ampolini et al.	2016/0302471	A1	10/2016	Bowen et al.
2015/0223523	A1	8/2015	McCullough	2016/0302485	A1	10/2016	Alima
2015/0224268	A1	8/2015	Henry et al.	2016/0302486	A1	10/2016	Eroch
2015/0230521	A1	8/2015	Talon	2016/0309779	A1	10/2016	Liu
2015/0245659	A1	9/2015	DePiano et al.	2016/0309789	A1	10/2016	Thomas, Jr.
2015/0245661	A1	9/2015	Milin	2016/0338411	A1	11/2016	Liu
2015/0245669	A1	9/2015	Cadieux et al.	2016/0345628	A1	12/2016	Sabet
2015/0257441	A1	9/2015	Gerkin	2016/0353804	A1	12/2016	Lord
2015/0257444	A1	9/2015	Chung	2016/0360784	A1	12/2016	Liu
2015/0257445	A1	9/2015	Henry, Jr. et al.	2016/0374393	A1	12/2016	Chen
2015/0257447	A1	9/2015	Sullivan	2017/0006916	A1	1/2017	Liu
2015/0258289	A1	9/2015	Henry, Jr. et al.	2017/0013875	A1	1/2017	Schennum et al.
2015/0272217	A1	10/2015	Chen	2017/0013876	A1	1/2017	Schennum et al.
2015/0282525	A1	10/2015	Plojoux et al.	2017/0013882	A1	1/2017	Liu
2015/0282526	A1	10/2015	Wu	2017/0013885	A1	1/2017	Qiu
2015/0282529	A1	10/2015	Li et al.	2017/0027221	A1	2/2017	Liu
2015/0282530	A1	10/2015	Johnson et al.	2017/0035109	A1	2/2017	Liu
				2017/0042229	A1	2/2017	Liu
				2017/0042242	A1	2/2017	Hon
				2017/0042248	A1	2/2017	Xiang
				2017/0049149	A1	2/2017	Carty
				2017/0049152	A1	2/2017	Liu
				2017/0071251	A1	3/2017	Goch

US 11,606,981 B2

Page 5

(56)

References Cited

U.S. PATENT DOCUMENTS

2017/0071256	A1	3/2017	Verleur et al.
2017/0086501	A1	3/2017	Buehler et al.
2017/0099880	A1	4/2017	Hawes
2017/0135401	A1	5/2017	Dickens
2017/0143038	A1	5/2017	Dickens
2017/0143040	A1	5/2017	Liu
2017/0157341	A1	6/2017	Pandya et al.
2017/0164655	A1	6/2017	Chen
2017/0188629	A1	7/2017	Dickens et al.
2017/0197046	A1	7/2017	Buchberger
2017/0202267	A1	7/2017	Liu
2017/0207499	A1	7/2017	Leadley
2017/0208865	A1	7/2017	Nettenstrom et al.
2017/0208866	A1	7/2017	Liu
2017/0208870	A1	7/2017	Liu
2017/0214261	A1	7/2017	Gratton
2017/0215476	A1	8/2017	Dickens et al.
2017/0222468	A1	8/2017	Schennum et al.
2017/0224014	A1	8/2017	Fraser
2017/0231284	A1	8/2017	News
2017/0238611	A1	8/2017	Buchberger
2017/0245554	A1	8/2017	Perez et al.
2017/0246405	A1	8/2017	Wensley et al.
2017/0251725	A1	9/2017	Buchberger et al.
2017/0273359	A1	9/2017	Liu
2017/0295847	A1	10/2017	Liu
2017/0325504	A1	11/2017	Liu
2017/0347706	A1	12/2017	Aoun et al.

FOREIGN PATENT DOCUMENTS

CA	2641869	A1	5/2010
CN	1196660	A	10/1998
CN	201104488	Y	8/2008
CN	100589726	C	2/2010
CN	201403497	Y	2/2010
CN	201408820	Y	2/2010
CN	201430916	Y	3/2010
CN	201491720	U	6/2010
CN	101861691	A	10/2010
CN	101869356	A	10/2010
CN	102014677	A	4/2011
CN	201781984	U	4/2011
CN	202004499	U	10/2011
CN	202566289	U	12/2012
CN	202603608	U	12/2012
CN	202890462	U	4/2013
CN	202941411	U	5/2013
CN	203040683	U	7/2013
CN	203087525	U	7/2013
CN	203152489	U	8/2013
CN	203168035	U	9/2013
CN	203182012	U	9/2013
CN	203182014	U	9/2013
CN	102727969	B	2/2014
CN	203467677	U	3/2014
CN	203538385	U	4/2014
CN	204070533	U	1/2015
CN	204120231	U	1/2015
CN	204180941	U	3/2015
CN	204217907	U	3/2015
CN	204466899	U	7/2015
DE	19619536	A1	10/1997
DE	102006004484	A1	8/2007
DE	202012004792	U1	6/2012
DE	102012100831	B3	2/2013
EP	0358114	A2	3/1990
EP	0845220	B1	9/2003
EP	2113178	A1	11/2009
EP	2399636	A1	12/2011
EP	2489391	A1	8/2012
EP	2614731	A1	7/2013
EP	2654471	A1	10/2013
EP	2967154	A1	1/2016
EP	3456214	A1	3/2019

EP	3469934	A1	4/2019
GB	2264237	A	8/1993
GB	2266466	A	11/1993
KR	101011453	B1	1/2011
KR	200454110	Y1	6/2011
KR	20110006928	U	7/2011
KR	200457340	Y1	12/2011
KR	20120074625	A	7/2012
KR	20120113519	A	10/2012
KR	20120008751	U	12/2012
KR	20130106741	A	9/2013
KR	20130107658	A	10/2013
TW	201315397	A	4/2013
WO	WO-2003061716	A1	7/2003
WO	WO-2003103387	A2	12/2003
WO	WO-2004080216	A1	9/2004
WO	WO-2008077271	A1	7/2008
WO	WO-2008138650	A1	11/2008
WO	WO-2009132793	A1	11/2009
WO	WO-2010118644	A1	10/2010
WO	WO-2010140841	A2	12/2010
WO	WO-2011125058	A1	10/2011
WO	WO-2011160788	A1	12/2011
WO	WO-2012043941	A1	4/2012
WO	WO-2012059726	A2	5/2012
WO	WO-2012062600	A1	5/2012
WO	WO-2012173322	A1	12/2012
WO	WO-2013020220	A1	2/2013
WO	WO-2013025921	A1	2/2013
WO	WO-2013040193	A2	3/2013
WO	WO-2013044537	A1	4/2013
WO	WO-2013068100	A1	5/2013
WO	WO-2013076750	A1	5/2013
WO	WO-2013083635	A1	6/2013
WO	WO-2013083636	A1	6/2013
WO	WO-2013089358	A1	6/2013
WO	WO-2013093695	A1	6/2013
WO	WO-2013098397	A2	7/2013
WO	WO-2013110208	A1	8/2013
WO	WO-2013110209	A1	8/2013
WO	WO-2013110210	A1	8/2013
WO	WO-2013113173	A1	8/2013
WO	WO-2013113174	A1	8/2013
WO	WO-2013116567	A1	8/2013
WO	WO-2013116983	A1	8/2013
WO	WO-2013171206	A1	11/2013
WO	WO-2013174001	A1	11/2013
WO	WO-2014008646	A1	1/2014
WO	WO-2014047948	A1	4/2014
WO	WO-2014071747	A1	5/2014
WO	WO-2014101401	A1	7/2014
WO	WO-2014101734	A1	7/2014
WO	WO-2014110750	A1	7/2014
WO	WO-2014121509	A1	8/2014
WO	WO-2014127446	A1	8/2014
WO	WO-2014139609	A2	9/2014
WO	WO-2014150979	A2	9/2014
WO	WO-2014161181	A1	10/2014
WO	WO-2014169667	A1	10/2014
WO	WO-2015024239	A1	2/2015
WO	WO-2015027383	A1	3/2015
WO	WO-2015027435	A1	3/2015
WO	WO-2015027470	A1	3/2015
WO	WO-2015032093	A1	3/2015
WO	WO-2015037925	A1	3/2015
WO	WO-2015051538	A1	4/2015
WO	WO-2015054862	A1	4/2015
WO	WO-2015066136	A1	5/2015
WO	WO-2015066927	A1	5/2015
WO	WO-2015070398	A1	5/2015
WO	WO-2015070405	A1	5/2015
WO	WO-2015071703	A1	5/2015
WO	WO-2015074187	A1	5/2015
WO	WO-2015074265	A1	5/2015
WO	WO-2015079197	A1	6/2015
WO	WO-2015082560	A1	6/2015
WO	WO-2015109476	A1	7/2015
WO	WO-2015120588	A1	8/2015
WO	WO-2015120623	A1	8/2015

(56)

References Cited

FOREIGN PATENT DOCUMENTS

WO	WO-2015123831	A1	8/2015
WO	WO-2015143648	A1	10/2015
WO	WO-2015149330	A1	10/2015
WO	WO-2015149332	A1	10/2015
WO	WO-2015149406	A1	10/2015
WO	WO-2015154309	A1	10/2015
WO	WO-2015157891	A1	10/2015
WO	WO-2015157893	A1	10/2015
WO	WO-2015157900	A1	10/2015
WO	WO-2015158548	A1	10/2015
WO	WO-2015161406	A1	10/2015
WO	WO-2015161553	A1	10/2015
WO	WO-2015165081	A1	11/2015
WO	WO-2015165086	A1	11/2015
WO	WO-2015165105	A1	11/2015
WO	WO-2015168912	A1	11/2015
WO	WO-2015176230	A1	11/2015
WO	WO-2015176300	A1	11/2015
WO	WO-2015176580	A1	11/2015
WO	WO-2015180071	A1	12/2015
WO	WO-2015180088	A1	12/2015
WO	WO-2015184620	A1	12/2015
WO	WO-2015184747	A1	12/2015
WO	WO-2015190810	A1	12/2015
WO	WO-2015192326	A1	12/2015
WO	WO-2015196332	A1	12/2015
WO	WO-2016000130	A1	1/2016
WO	WO-2016000136	A1	1/2016
WO	WO-2016000206	A1	1/2016
WO	WO-2016000232	A1	1/2016
WO	WO-2016000233	A1	1/2016
WO	WO-2016015246	A1	2/2016
WO	WO-2016019353	A1	2/2016
WO	WO-2016023173	A1	2/2016
WO	WO-2016023212	A1	2/2016
WO	WO-2016026104	A1	2/2016
WO	WO-2016026105	A1	2/2016
WO	WO-2016026156	A1	2/2016
WO	WO-2016029567	A1	3/2016
WO	WO-2016033721	A1	3/2016
WO	WO-2016041114	A1	3/2016
WO	WO-2016041140	A1	3/2016
WO	WO-2016041141	A1	3/2016
WO	WO-2016041207	A1	3/2016
WO	WO-2016041209	A1	3/2016
WO	WO-2016045058	A1	3/2016
WO	WO-2016049822	A1	4/2016
WO	WO-2016049823	A1	4/2016
WO	WO-2016049855	A1	4/2016
WO	WO-2016054793	A1	4/2016
WO	WO-2016058139	A1	4/2016
WO	WO-2016059000	A1	4/2016
WO	WO-2016061730	A1	4/2016

WO	WO-2016061822	A1	4/2016
WO	WO-2016062168	A1	4/2016
WO	WO-2016065521	A1	5/2016
WO	WO-2016065532	A1	5/2016
WO	WO-2016065533	A1	5/2016
WO	WO-2016065596	A1	5/2016
WO	WO-2016065598	A1	5/2016
WO	WO-2016065599	A1	5/2016
WO	WO-2016070553	A1	5/2016

OTHER PUBLICATIONS

"New Tank E-Cigarette:innokin 510T." From China Manufacturer, Manufactory, Factory and Supplier on ECVV.com, Nov. 15, 2011, www.ecvv.com/product/3118191.html.

Chinabuy. "Innokin ITaste VV Tank Starter Kit Electronic Cigarette with Clearomizer." YouTube, YouTube, Jul. 23, 2013, www.youtube.com/watch?v=mz414d8MU20.

Cloud pen vaporizer unboxing review by vaporizer blog // VaporizerBlog.com, <https://www.youtube.com/watch?v=ixHMkXoWKNg>.

Glory Vapes. "Glory Vapes TV: Kanger S1 Cubica Series Starter Kit Unboxing." YouTube, YouTube, Aug. 8, 2013, www.youtube.com/watch?v=NQjvJ6YhdbA.

Joye eGo-Tank System XXL 1000mAh Starter Kit, <https://www.myvaporstore.com/eGo-Tank-System-XXL-1000mAh-Starter-Kit-p/ego-t-xxlkit.htm>.

Uptoyou Fromeme. "Elips Ego SOLE Electronic Cigarette Kit Patent Elipse Flat Upgrade F6 Section with Atomizer CE4." YouTube, YouTube, Sep. 12, 2013, www.youtube.com/watch?v=cnPcqDzFm0Q.

Vaporizers Reviewed. "AtmosRX Optimus 510 Vaporizer Review." YouTube, YouTube, Oct. 10, 2013, www.youtube.com/watch?v=wsyQncG8FB8.

Vaporizers Reviewed. "MicroG Pen Vaporizer Review." YouTube, YouTube, Nov. 6, 2013, www.youtube.com/watch?v=pLhtL8vosrs.

U.S. Appl. No. 14/196,729, filed Mar. 4, 2014, now U.S. Pat. No. 10,039,321.

U.S. Appl. No. 14/539,801, filed Nov. 12, 2014, now U.S. Pat. No. 10,085,481.

U.S. Appl. No. 14/790,566, filed Jul. 2, 2015, US 2015-0305409.

U.S. Appl. No. 14/201,267, filed Mar. 7, 2014, now U.S. Pat. No. 10,842,191.

U.S. Appl. No. 16/119,359, filed Aug. 31, 2018, US 2018-0368481.

U.S. Appl. No. 16/179,829, filed Nov. 2, 2018, now U.S. Pat. No. 10,653,186.

U.S. Appl. No. 16/181,316, filed Nov. 5, 2018, now U.S. Pat. No. 10,667,561.

U.S. Appl. No. 16/193,994, filed Nov. 16, 2018, now U.S. Pat. No. 10,736,360.

U.S. Appl. No. 16/193,943, filed Nov. 16, 2018, US 2019-0082740.

U.S. Appl. No. 15/036,292, filed Nov. 12, 2014, US 2016-0278436.

* cited by examiner

Fig. 1

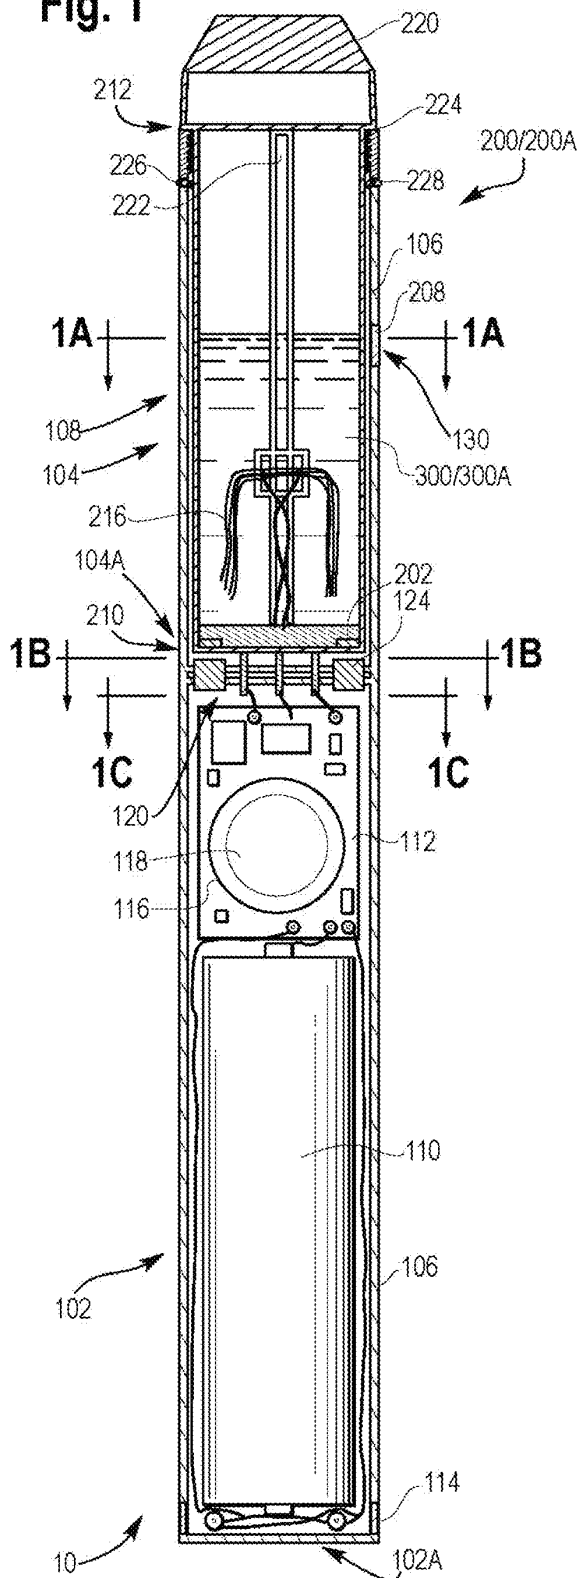


Fig. 1A




Fig. 1B



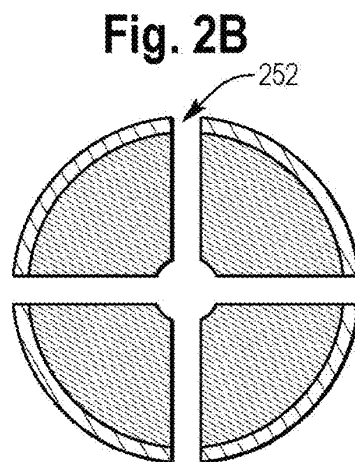
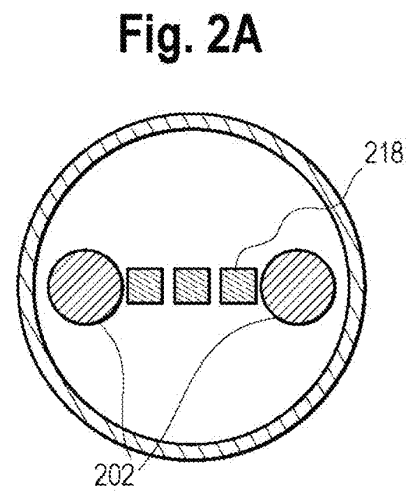
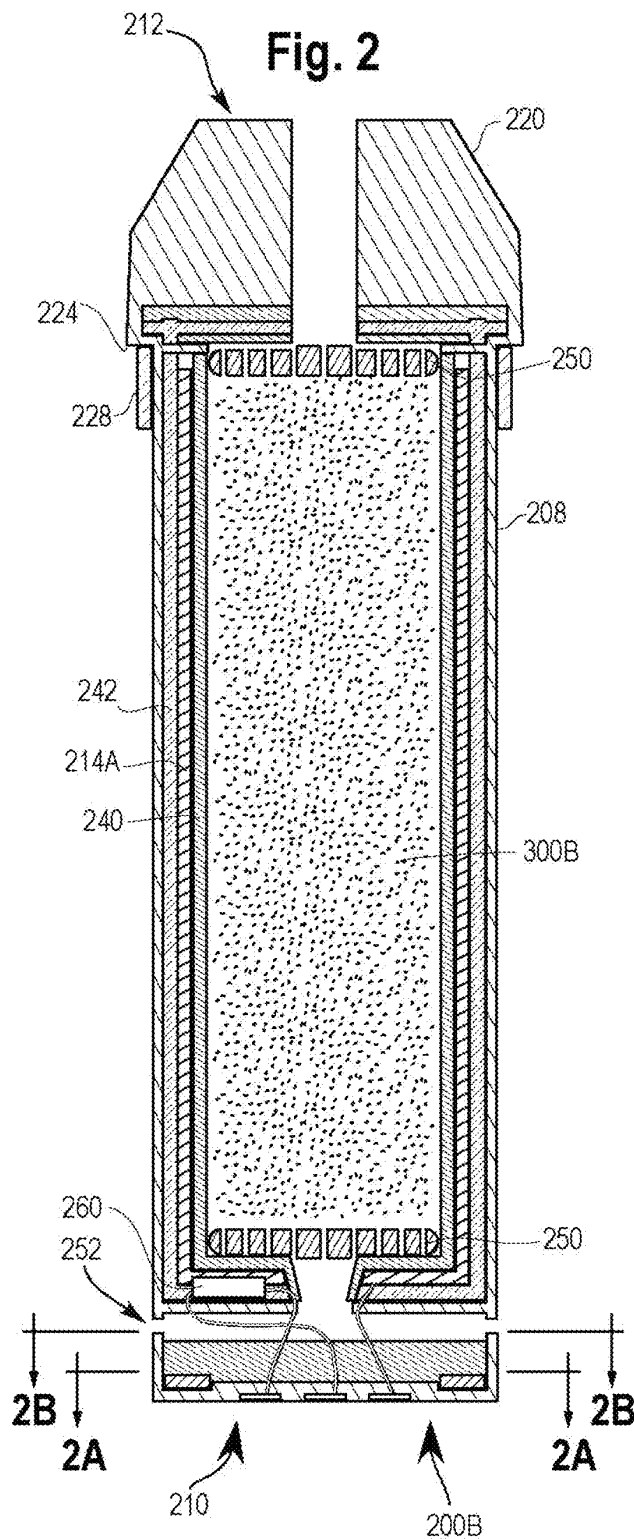
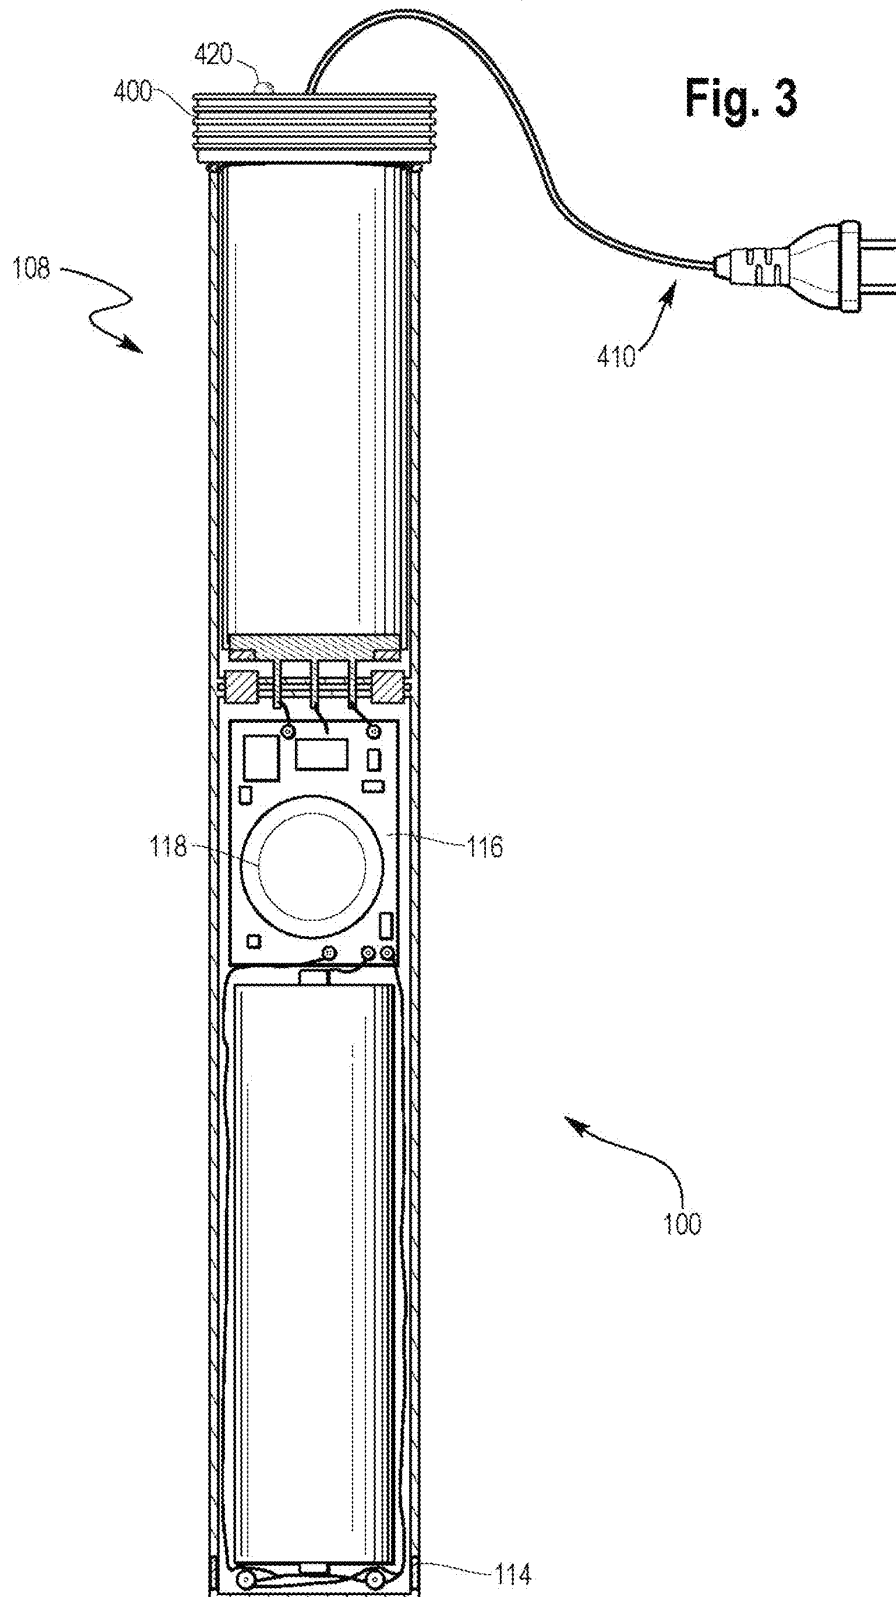


Fig. 1C







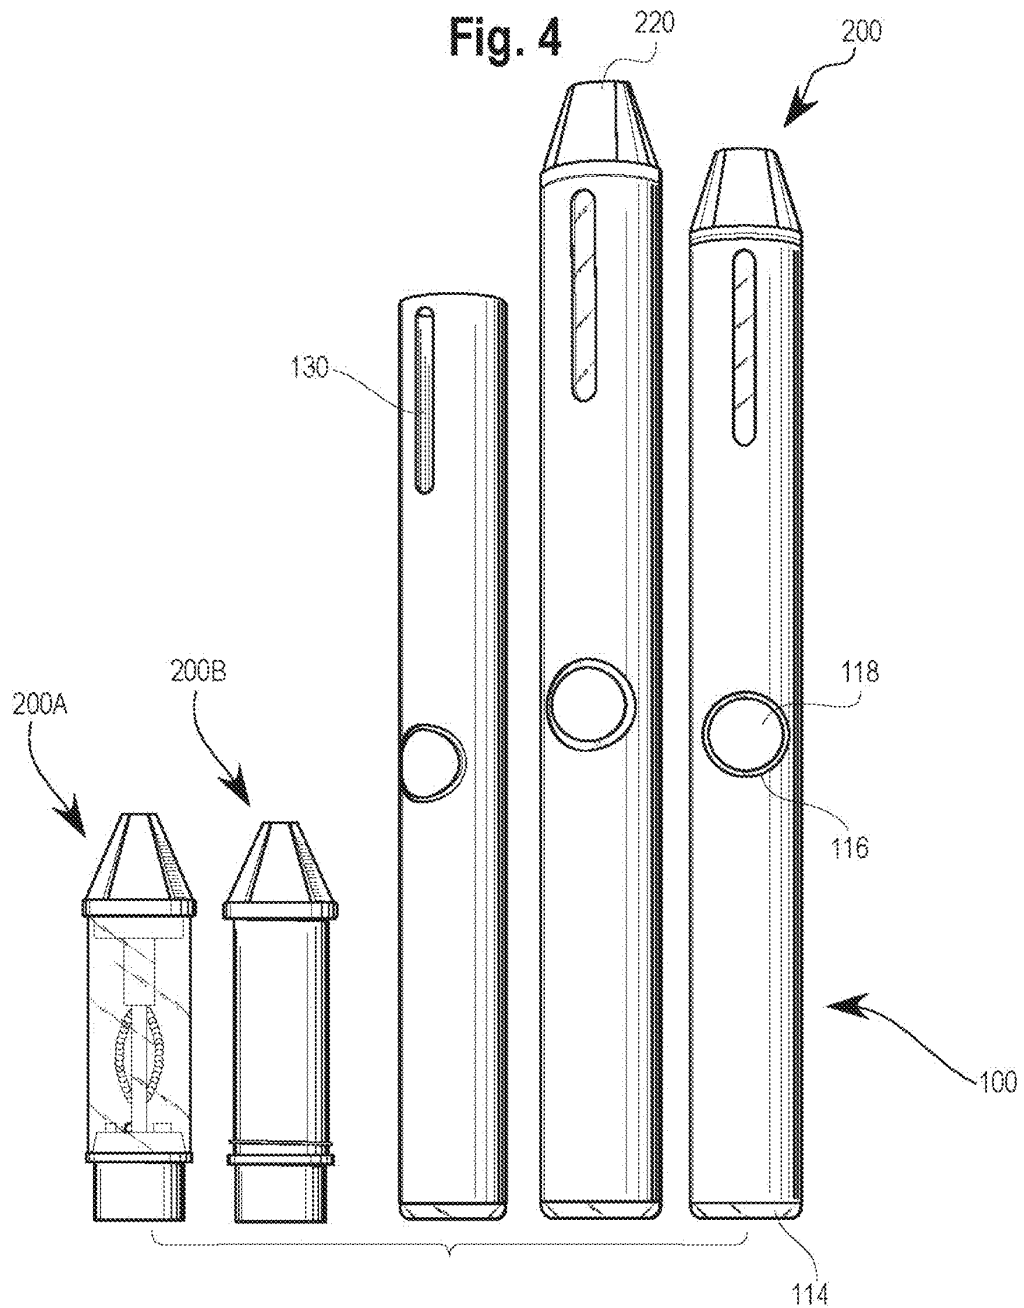
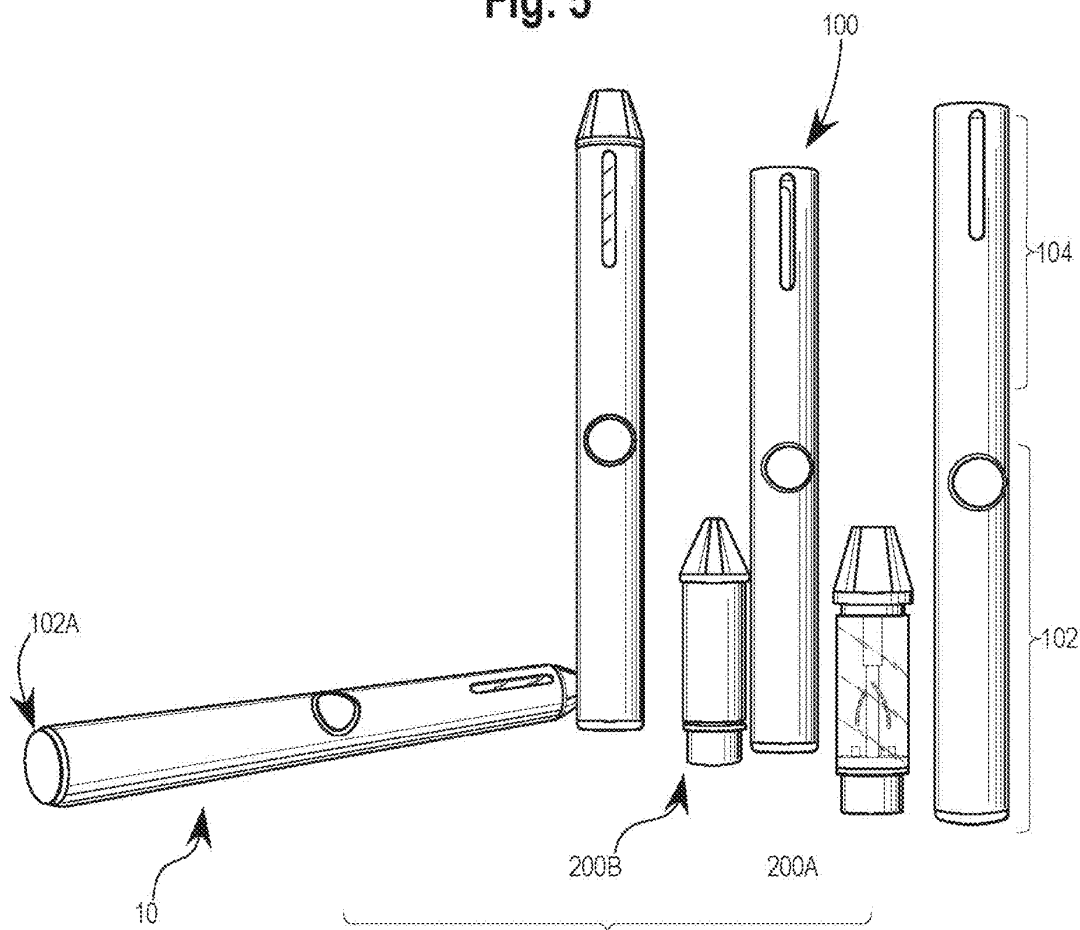


Fig. 5



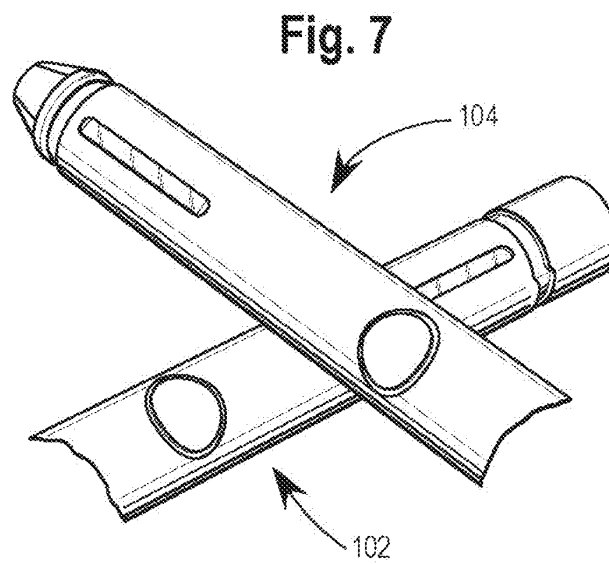
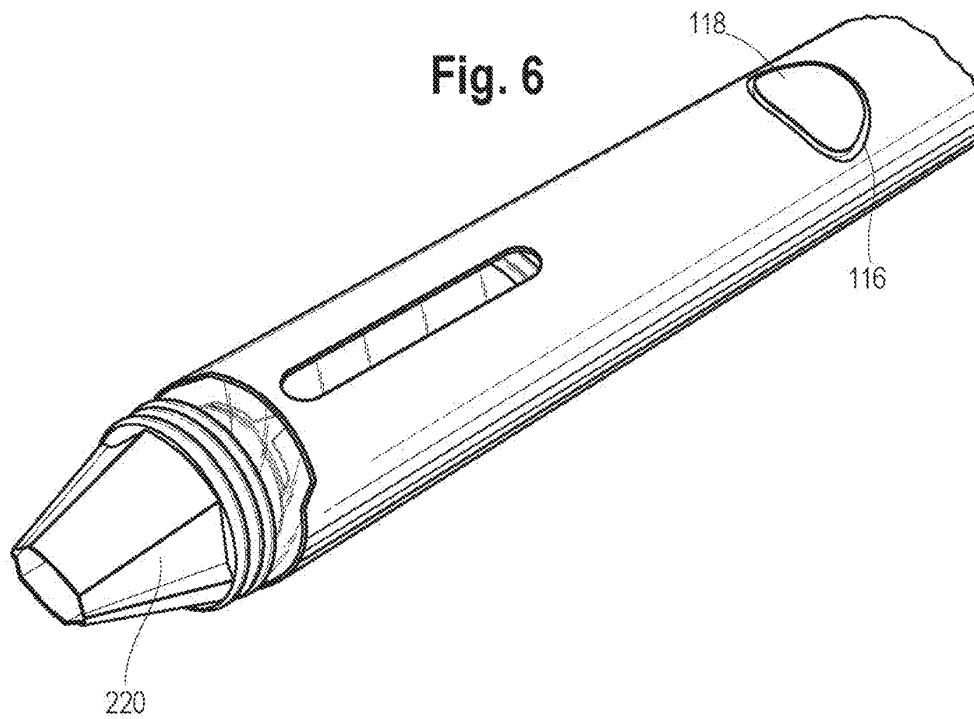


Fig. 8

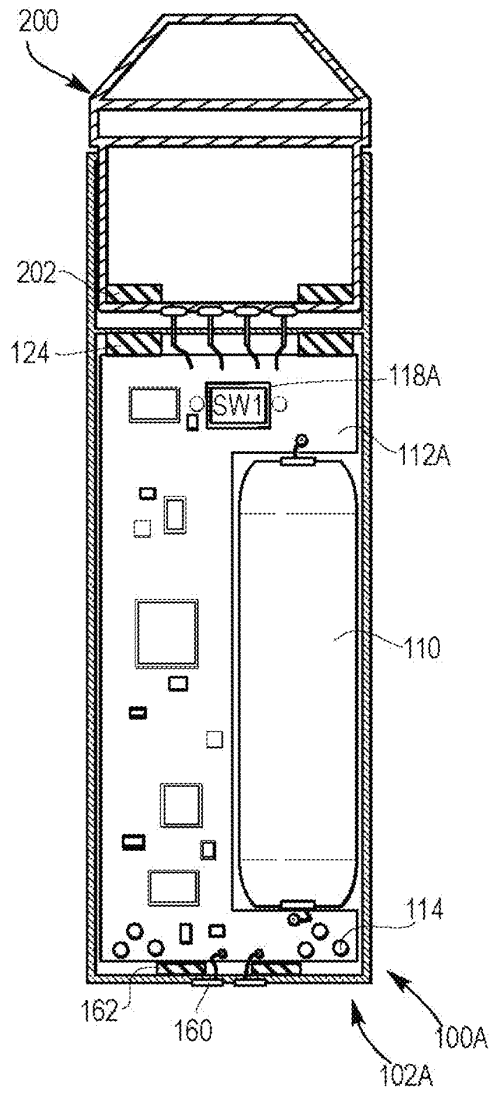


Fig. 9

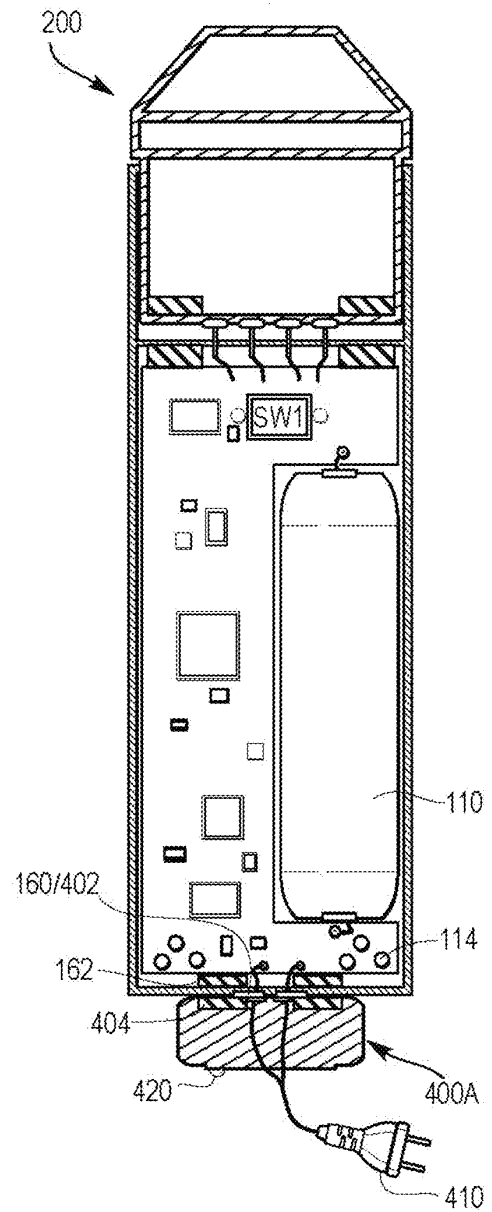


Fig. 10

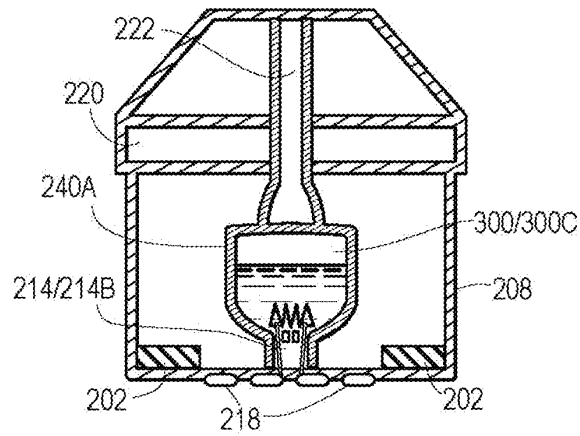
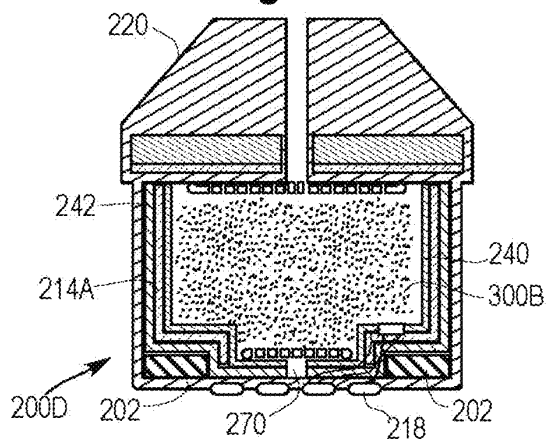


Fig. 11



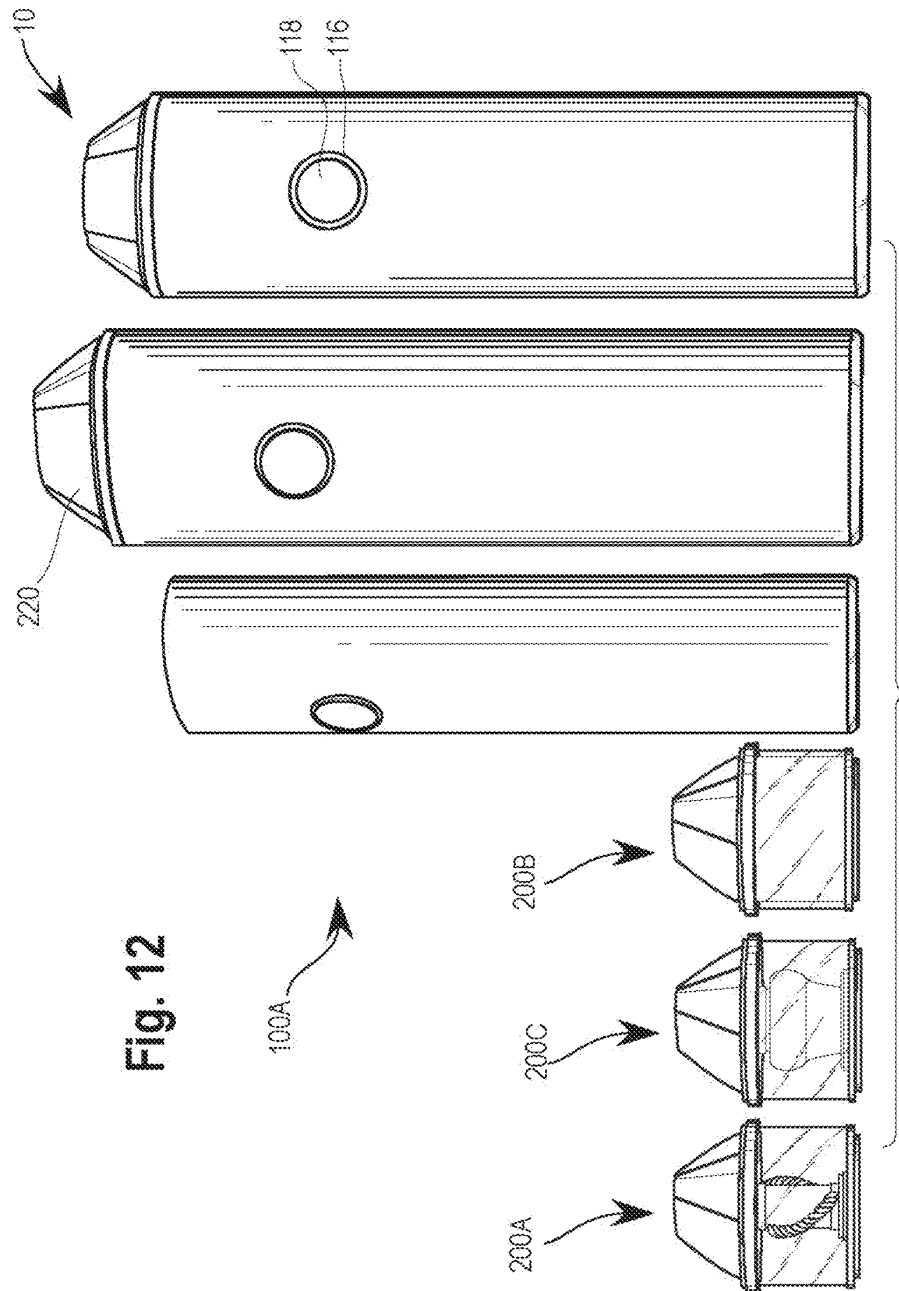


Fig. 13

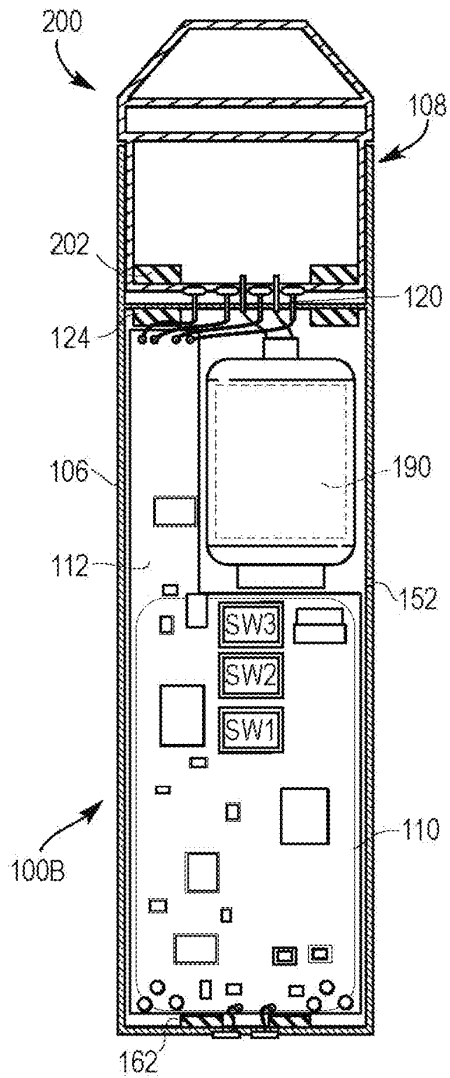
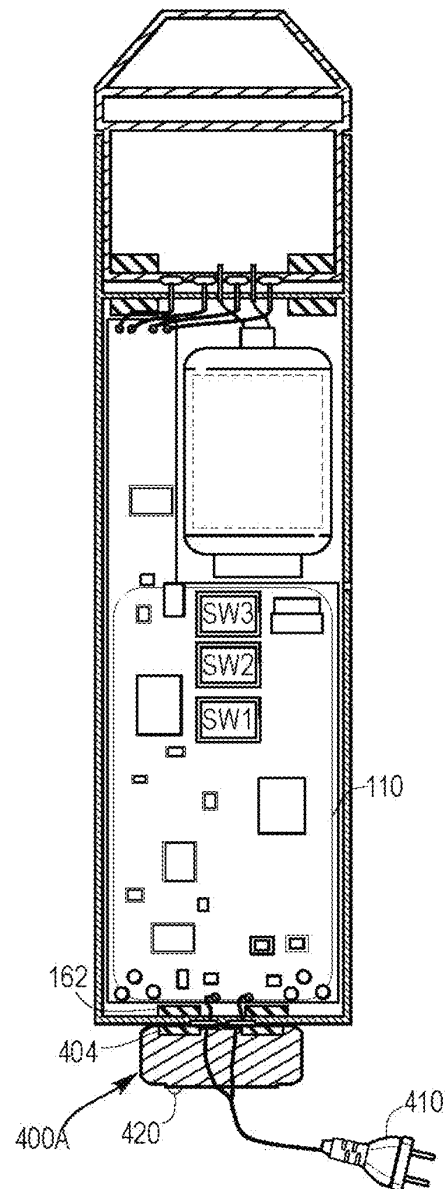


Fig. 14



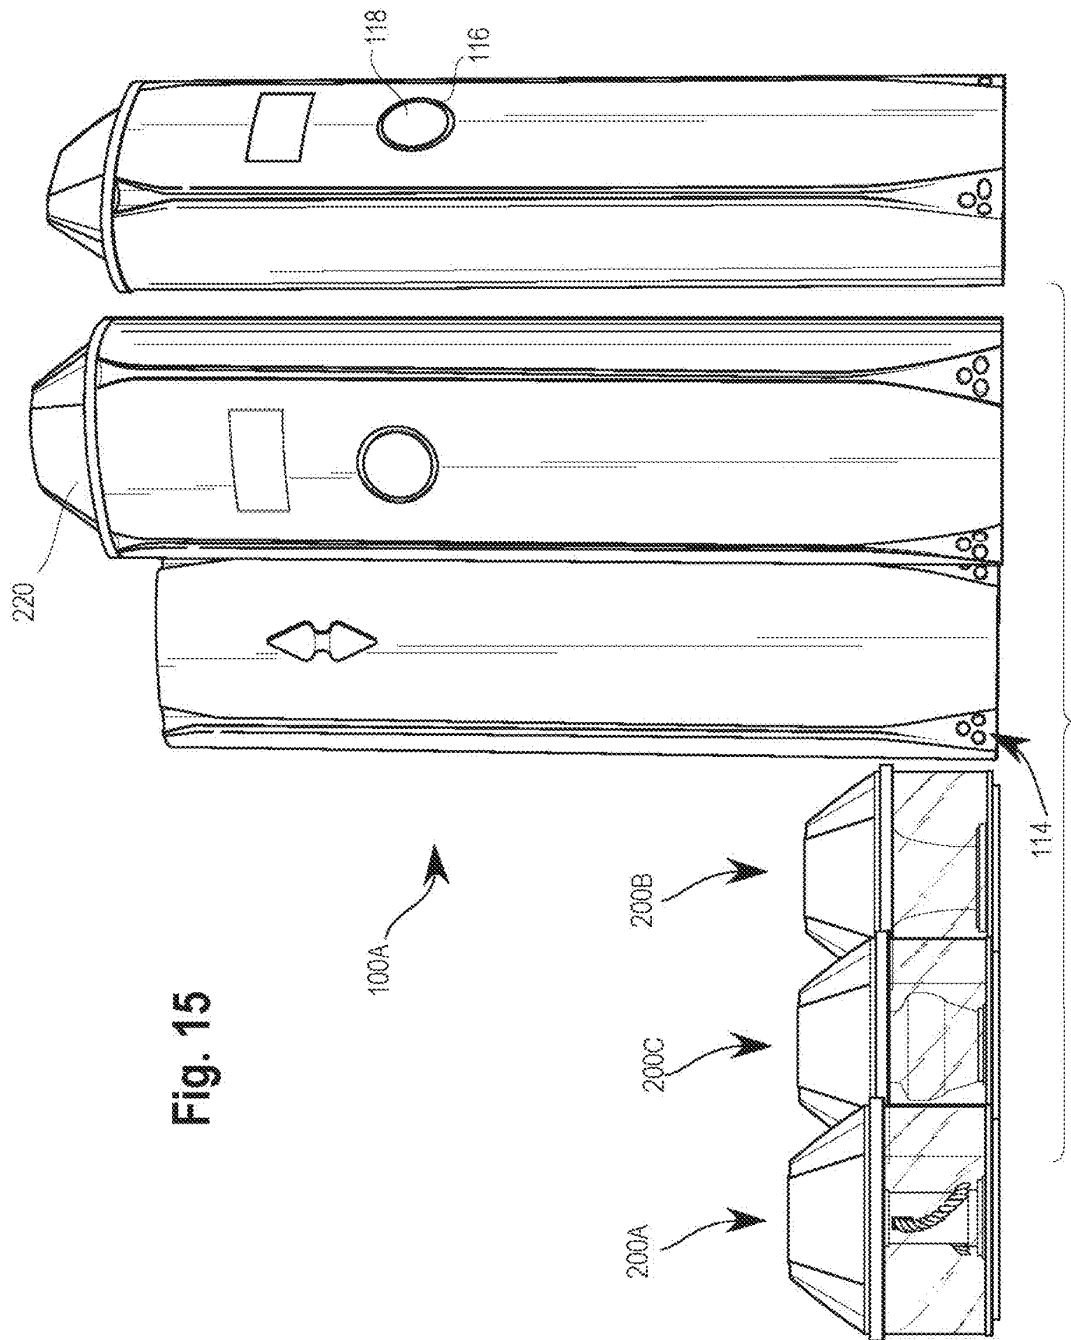


FIG. 16

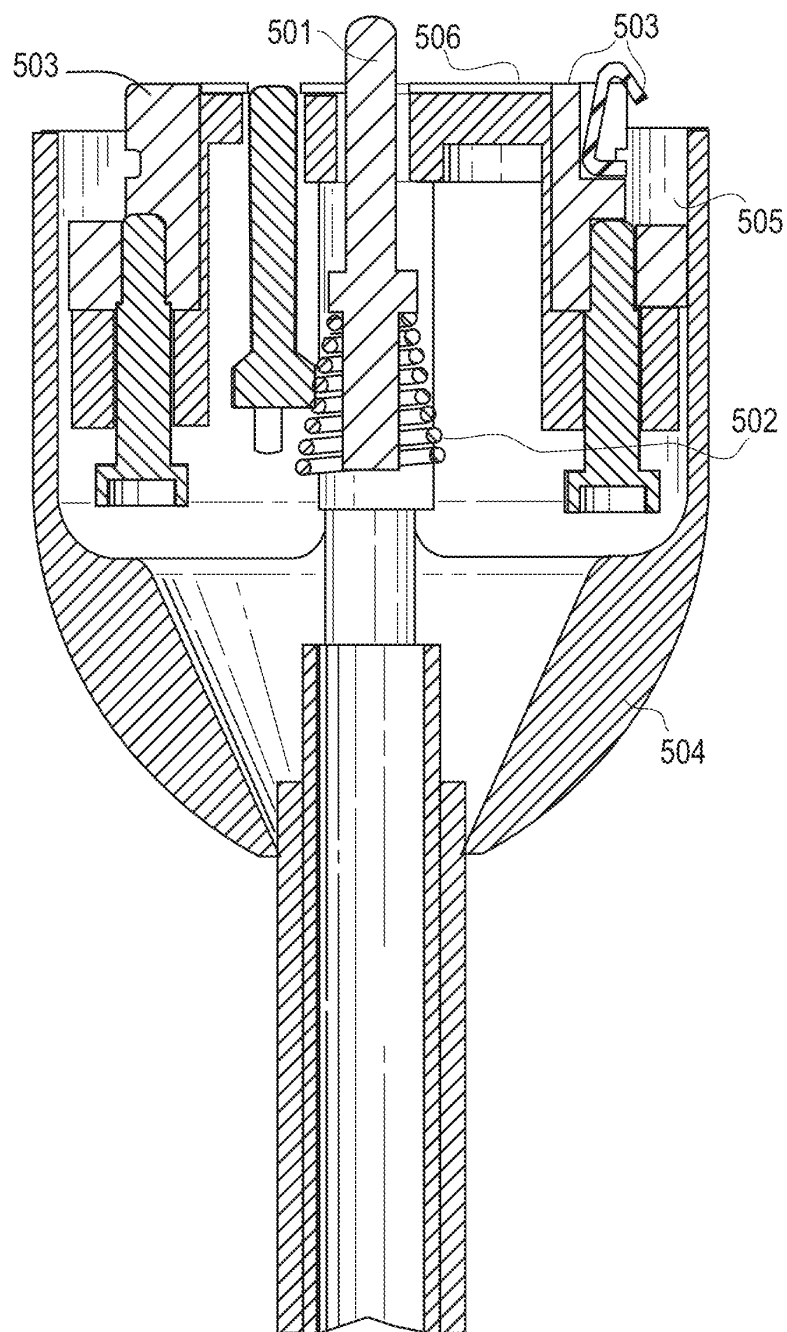


FIG. 17

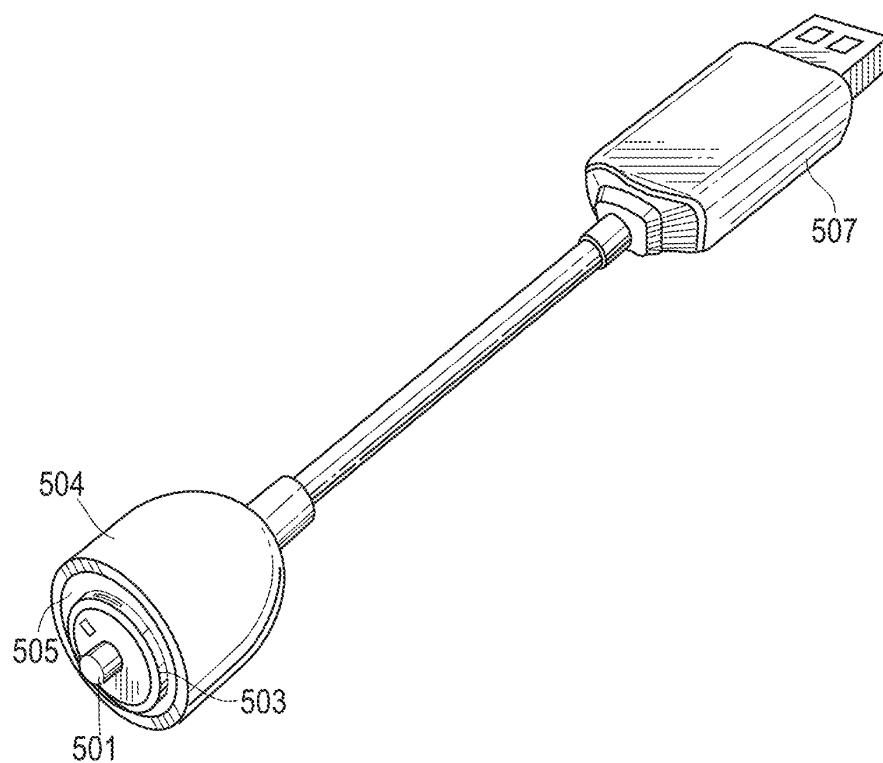


FIG. 18

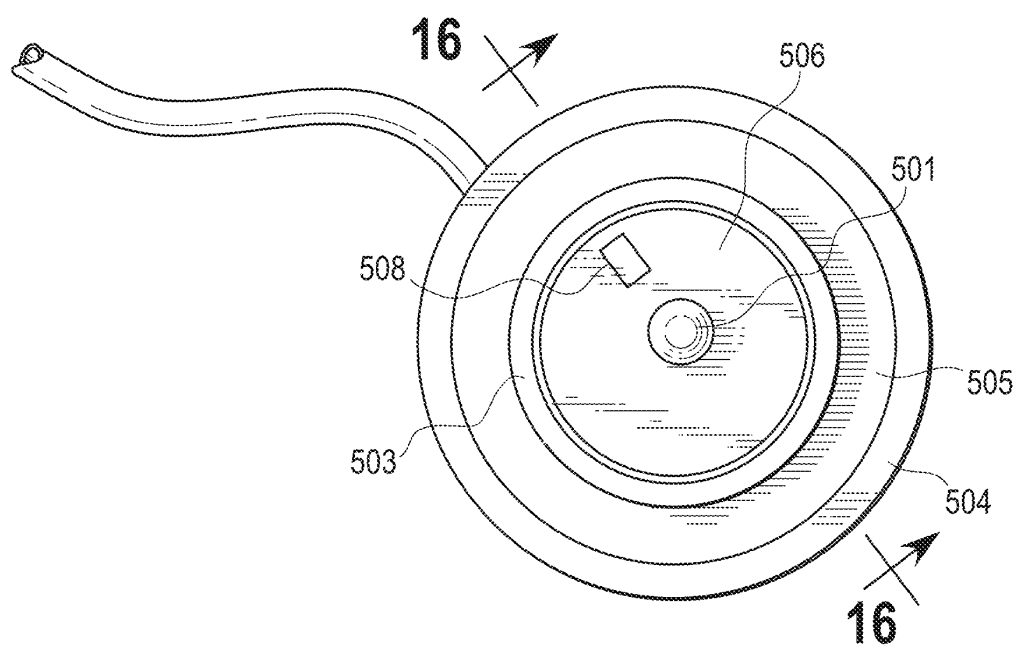


FIG. 19

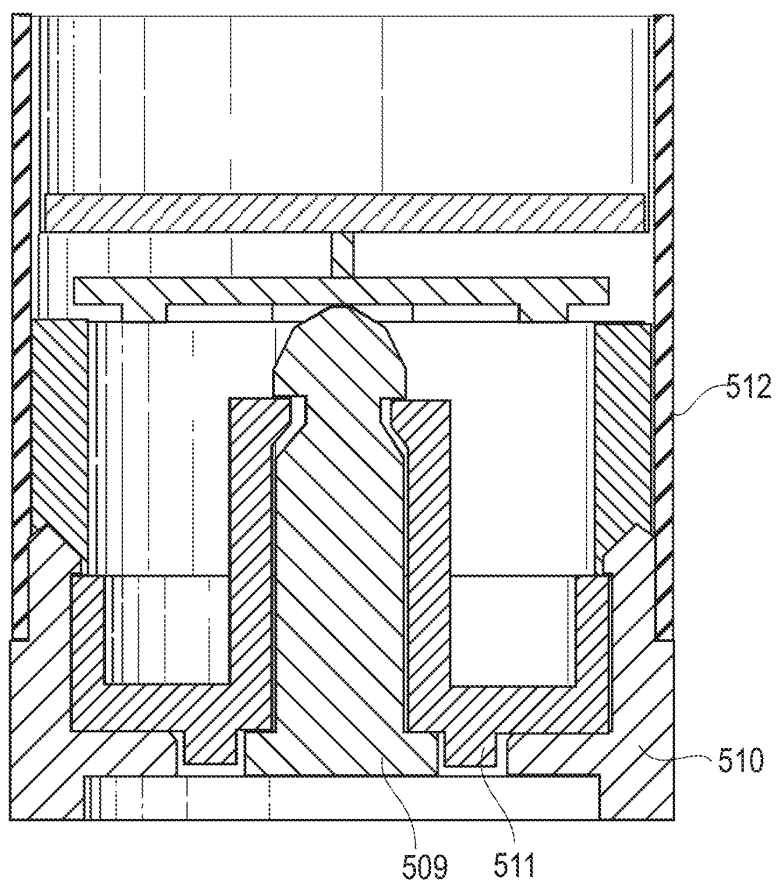


FIG. 20

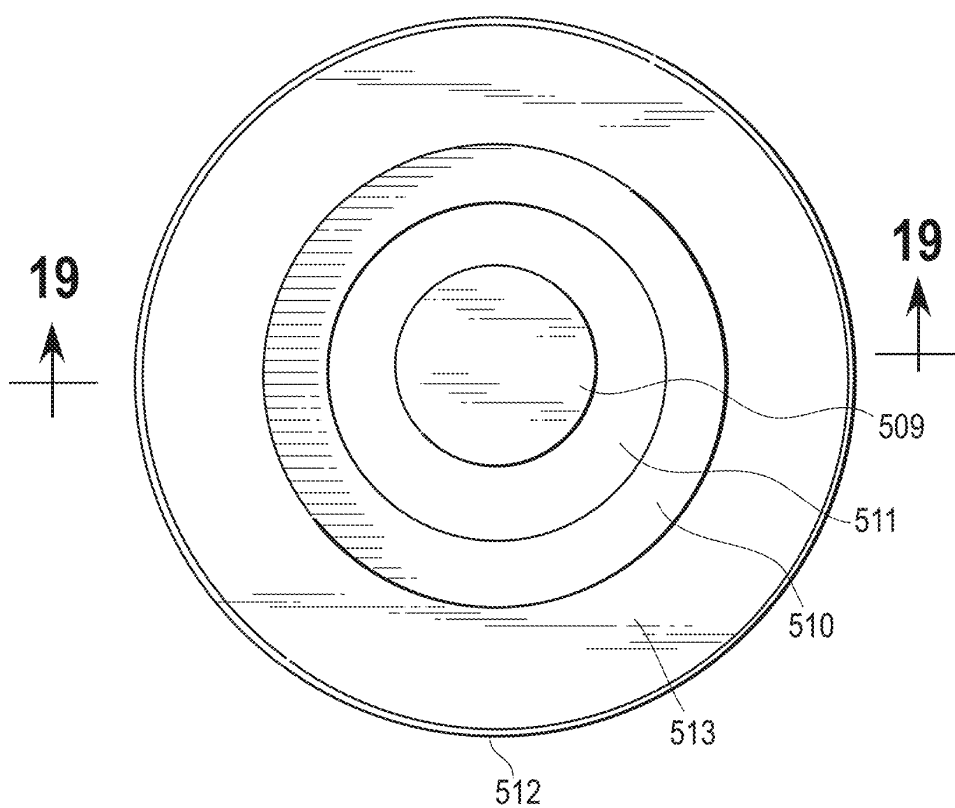


FIG. 21


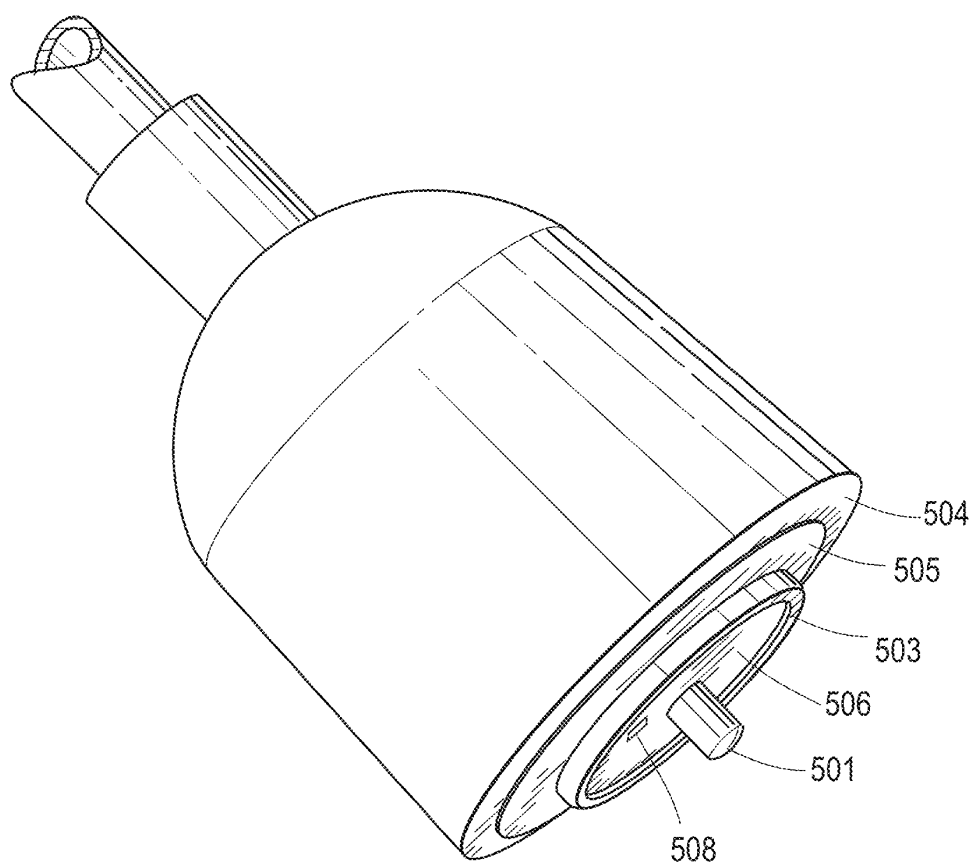


FIG. 22

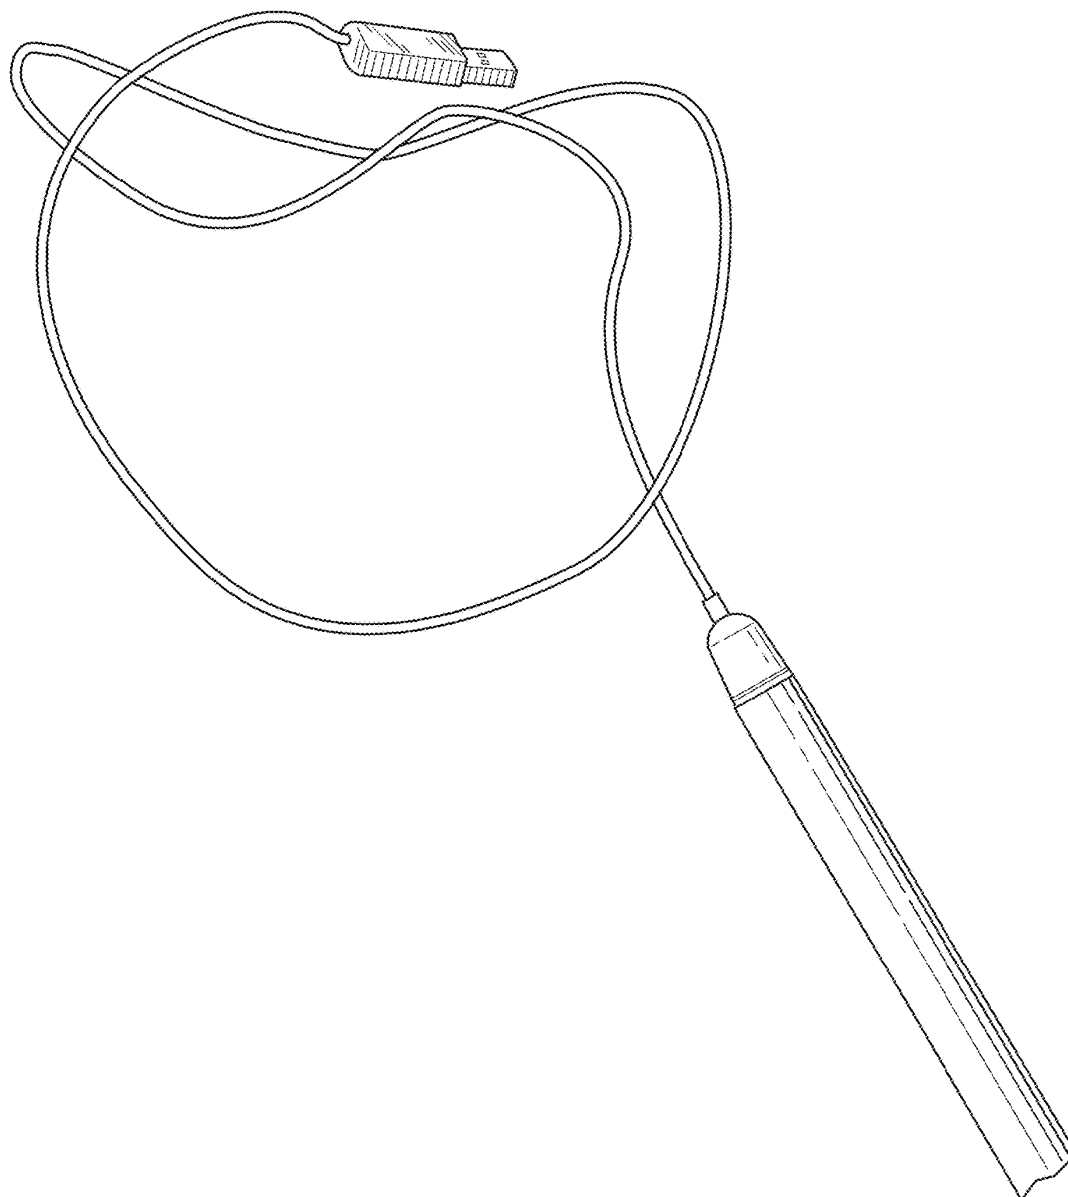

1

VAPORIZER

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. application Ser. No. 14/201,267, filed Mar. 7, 2014, which is a continuation of U.S. application Ser. No. 14/196,729 filed Mar. 4, 2014, now U.S. Pat. No. 10,039,321, which claims the benefit of U.S. Provisional Application Nos. 61/903,344 filed Nov. 12, 2013, and 61/937,851, filed Feb. 10, 2014, the disclosures of which are hereby incorporated herein by reference in their entireties.

FIELD OF THE INVENTION

This invention relates to the field of vaporizers, which may also be referred to as electronic cigarettes.

BACKGROUND

Electronic cigarettes have recently emerged as a new product for providing nicotine through a smokeless inhalation process. Typically, implementations consist of a power supply (typically a battery) and an atomizing device. In reusable electronic cigarettes the two items are separated into a battery and a cartomizer, to allow the disposal and replacement of a nicotine containing fluid cartomizer while preserving the more costly battery and associated circuitry (microcontroller, switch, indicating LED, etc.) for additional use. In disposable electronic cigarettes, the two items are combined to integrate the functions into one unit that is discarded after either the battery energy or the nicotine containing liquid is exhausted.

The electronic cigarette liquid used to vaporize ingredients such as nicotine is generally a solution of propylene glycol (PG), vegetable glycerin (VG), or polyethylene glycol 400 (PEG400), as well as their mixtures to which a flavor and/or nicotine has been added. The solution is often sold in a bottle (for refilling by the user) or in disposable cartridges or cartomizers. Many different flavors are incorporated into these liquids, including those that resemble the taste of regular tobacco, menthol, vanilla, coffee, cola and/or various fruits. Various nicotine concentrations are also available, and nicotine-free solutions are also common.

BRIEF SUMMARY

One embodiment of a vaporizer, in accordance with the disclosure, may include a shell having a battery segment and a cartomizer receiving segment, the cartomizer receiving segment may define a chamber having an insertion end distal to the battery segment of said shell and a base end proximate to the battery segment, the chamber dimensioned to receive a cartomizer inserted into the chamber at the insertion end of the chamber. The vaporizer may also include a battery housed within the battery segment. The vaporizer may further include electrical contacts provided between the base end of the chamber and the battery portion, the electrical contacts including a positive contact and a negative contact insulated from the positive contact. Electronic circuitry may be housed within the battery segment of said shell and operable to direct an electrical current between the battery and the electrical contacts. Additionally, a chamber magnet may be provided in or proximate to the chamber, the chamber magnet operable to secure a cartomizer received within the chamber, wherein the cartomizer includes either

2

a metallic surface or a cartomizer magnet having a polarity opposite to that of the chamber magnet. The electrical contacts and battery may each be in electrical connection with said electronic circuitry. The cartomizer may be securable within the chamber as a cartomizer surface and a magnetically attracted chamber surface are placed adjacent to one another.

In another embodiment of a vaporizer, in accordance with the disclosure, the vaporizer may include a shell having a battery segment and a cartomizer receiving segment, the cartomizer receiving segment defining a chamber having an insertion end distal from the battery segment and a base end proximate to the battery segment. The vaporizer may further include a cartomizer insertable into the chamber at the insertion end, and the cartomizer may include a cartomizer body dimensioned to hold a vaporizable substance, a heating element provided within or proximate to the cartomizer body operable to heat the vaporizable substance, cartomizer electrical contacts provided on the exterior of the cartomizer, cartomizer electrical circuitry operable to direct an electronic current between the cartomizer electrical contacts and the heating element, and a mouthpiece in fluid communication with the cartomizer body, the mouthpiece extending from the insertion end of the chamber when the cartomizer is inserted in the chamber. The heating element may be activated by the current and is operable to heat the vaporizable substance to a vaporization temperature. A battery may be housed within the battery segment. The vaporizer may also include battery electrical contacts provided between the base end of the chamber and the battery segment, the battery electrical contacts positioned to contact the cartomizer electrical contacts when the cartomizer is inserted in the chamber. Additionally, the vaporizer may include battery electrical circuitry housed within the battery segment and operable to direct an electrical current between the battery, the battery electrical contacts, the cartomizer electrical contacts, the heating element, and the inserted cartomizer.

BRIEF DESCRIPTION OF THE FIGURES

FIG. 1 illustrates a front view of an embodiment of an electronic cigarette of the disclosure comprising a first embodiment of a battery portion with an embodiment of a cartomizer for use with a vaporizable liquid inserted into a cartomizer chamber of the first embodiment battery portion, the outer shell of the first embodiment battery portion shown transparently so as to illustrate the inner components of the electronic cigarette.

FIG. 1A illustrates a lateral cross sectional view of the electronic cigarette of FIG. 1 illustrating an electrical connector and magnets.

FIG. 1B illustrates a lateral cross sectional view of the electronic cigarette of FIG. 1 illustrating the end of the inserted cartomizer.

FIG. 1C illustrates a lateral cross sectional view of the electronic cigarette of FIG. 1 illustrating the cartomizer chamber.

FIG. 2 illustrates a front view of an embodiment of a cartomizer in accordance with the disclosure that may be inserted into the cartomizer chamber of the battery portion of FIG. 1, the outer shell of the first embodiment battery portion shown transparently so as to illustrate the inner components of the electronic cigarette.

FIG. 2A illustrates a lateral cross sectional view of the cartomizer of FIG. 2 illustrating the end of the cartomizer at the inserted end.

3

FIG. 2B illustrates a lateral cross sectional view of the cartomizer of FIG. 2 illustrating the air hole structure.

FIG. 3 illustrates a front view of an embodiment of the battery portion of FIG. 1 with an embodiment of a charger, in accordance with the disclosure, inserted into the cartomizer chamber, with the outer shell of the first embodiment battery portion shown transparently so as to illustrate the inner components of the electronic cigarette.

FIGS. 4-7 illustrate embodiments of electronic cigarettes comprising the first battery portion of FIGS. 1-3 and the cartomizers of FIGS. 1 and 2, in accordance with the disclosure.

FIG. 8 illustrates a front view of an embodiment of an electronic cigarette, in accordance with the disclosure, comprising a second embodiment of a battery portion with the outer shell of the second embodiment battery portion shown transparently so as to illustrate the inner components of the electronic cigarette.

FIG. 9 illustrates a front view of the electronic cigarette of FIG. 8 with a charger attached, with the outer shell of the second embodiment battery portion shown transparently so as to illustrate the inner components of the electronic cigarette.

FIG. 10 illustrates a front cross sectional view of an embodiment of a cartomizer in accordance with the disclosure.

FIG. 11 illustrates a front view of an embodiment of a cartomizer in accordance with the disclosure.

FIG. 12 illustrates embodiments of electronic cigarettes comprising the second battery portion of FIGS. 8-9 and the cartomizers of FIGS. 8-10.

FIG. 13 illustrates a front view of an embodiment of an electronic cigarette in accordance with the disclosure, with the outer shell of the embodiment of the battery portion shown transparently so as to illustrate the inner components of the electronic cigarette.

FIG. 14 illustrates a front view of the electronic cigarette of FIG. 13 with a charger attached.

FIG. 15 illustrates embodiments of the electronic cigarette of FIGS. 13-14 in accordance with the disclosure.

FIG. 16 illustrates a longitudinal cross sectional view of an embodiment of charger contacts on a power cord of a vaporizer or electronic cigarette charger of the present invention.

FIG. 17 illustrates a perspective view of an embodiment of charger contacts on a power cord of a vaporizer or electronic cigarette charger of the present invention.

FIG. 18 illustrates a lateral view of an embodiment of charger contacts on a power cord of a vaporizer or electronic cigarette charger of the present invention.

FIG. 19 illustrates a longitudinal cross sectional view of an embodiment of charger contacts of a vaporizer or electronic cigarette for connecting with a vaporizer or electronic cigarette charger of the present invention.

FIG. 20 illustrates a lateral cross sectional view of an embodiment of charger contacts on a vaporizer or electronic cigarette for connecting with a vaporizer or electronic cigarette charger of the present invention.

FIG. 21 illustrates a perspective view of an embodiment of charger contacts on a power cord of a vaporizer or electronic cigarette charger of the present invention.

FIG. 22 illustrates a side view of an embodiment of a charger of the present invention in contact with charger contacts of a vaporizer or electronic cigarette for charging a vaporizer or electronic cigarette battery.

DETAILED DESCRIPTION

The following detailed description and the appended drawings describe and illustrate exemplary embodiments of

4

the invention solely for the purpose of enabling one of ordinary skill in the relevant art to make and use the invention. As such, the detailed description and illustration of these embodiments are purely exemplary in nature and are in no way intended to limit the scope of the invention, or its protection, in any manner. It should also be understood that the drawings are not to scale and in certain instances details have been omitted, which are not necessary for an understanding of the present invention, such as conventional details of fabrication and assembly.

One embodiment of a vaporizer, in accordance with the disclosure, may include a shell having a battery segment and a cartomizer receiving segment, the cartomizer receiving segment may define a chamber having an insertion end distal to the battery segment of said shell and a base end proximate to the battery segment, the chamber dimensioned to receive a cartomizer inserted into the chamber at the insertion end of the chamber. The vaporizer may also include a battery housed within the battery segment. The vaporizer may further include electrical contacts provided between the base end of the chamber and the battery portion, the electrical contacts including a positive contact and a negative contact insulated from the positive contact. Electronic circuitry may be housed within the battery segment of said shell and operable to direct an electrical current between the battery and the electrical contacts. Additionally, a chamber magnet may be provided in or proximate to the chamber, the chamber magnet operable to secure a cartomizer received within the chamber, wherein the cartomizer includes either a metallic surface or a cartomizer magnet having a polarity opposite to that of the chamber magnet. The electrical contacts and battery may each be in electrical connection with said electronic circuitry. The cartomizer may be securable within the chamber as a cartomizer surface and a magnetically attracted chamber surface are placed adjacent to one another.

In some embodiments, the chamber magnet may be provided proximate to the base end of the chamber, the chamber magnet insulated from the electrical contacts. The vaporizer may further include an additional chamber magnet provided proximate to the base end of the chamber, the additional chamber magnet insulated from the electrical contacts and the chamber magnet, the additional chamber magnet having a polarity opposite to that of the chamber magnet. The electronic circuitry may include a printed circuit board.

Additional embodiments of the vaporizer may include an activation button provided on the exterior of the shell in electrical communication with the electronic circuitry, the electrical contacts and the battery, wherein manipulation of the activation button by a user of the vaporizer operates to control the current from the battery to the electronic contacts; a printed circuit board; and an indicator ring surrounding at least a portion of the activation button, the indicator ring in electrical communication with the electronic circuitry, the electrical contacts and the battery, said indicator ring illuminable to indicate a state of the vaporizer, the indicator ring controllable by the printed circuit board, and the printed circuit board may be in electrical communication with the electrical contacts, the battery, the activation button and the indicator ring. The vaporizer may also include a display screen provided on the exterior of the shell, said display screen in electrical communication with said printed circuit board and battery, the display screen controlled by the printed circuit board and operable to display a message. At least one of the electrical contacts may be a spring-loaded pin extending into a portion of the chamber and retractable

5

when pressed by the cartomizer when inserted into the chamber. The shell may include a window provided at the cartomizer receiving segment so that a portion of the chamber is visible from outside the shell.

In another embodiment of a vaporizer, in accordance with the disclosure, the vaporizer may include a shell having a battery segment and a cartomizer receiving segment, the cartomizer receiving segment defining a chamber having an insertion end distal from the battery segment and a base end proximate to the battery segment. The vaporizer may further include a cartomizer insertable into the chamber at the insertion end, and the cartomizer may include a cartomizer body dimensioned to hold a vaporizable substance, a heating element provided within or proximate to the cartomizer body operable to heat the vaporizable substance, cartomizer electrical contacts provided on the exterior of the cartomizer, cartomizer electrical circuitry operable to direct an electronic current between the cartomizer electrical contacts and the heating element, and a mouthpiece in fluid communication with the cartomizer body, the mouthpiece extending from the insertion end of the chamber when the cartomizer is inserted in the chamber. The heating element may be activated by the current and is operable to heat the vaporizable substance to a vaporization temperature. A battery may be housed within the battery segment. The vaporizer may also include battery electrical contacts provided between the base end of the chamber and the battery segment, the battery electrical contacts positioned to contact the cartomizer electrical contacts when the cartomizer is inserted in the chamber. Additionally, the vaporizer may include battery electrical circuitry housed within the battery segment and operable to direct an electrical current between the battery, the battery electrical contacts, the cartomizer electrical contacts, the heating element, and the inserted cartomizer.

In embodiments of the disclosure, the vaporizable substance may be a fluid, the heating element may include a wicking element for absorbing the fluid, and at least a portion of the cartomizer body may be composed of a translucent material. The cartomizer may further include a container provided within the cartomizer body and dimensioned to hold the vaporizable substance, wherein the heating element is provided exterior to at least a portion of the container and is operable to heat the container thereby heating the vaporizable substance to the vaporization temperature. The heating element may include conductive material intertwined with non-conductive material, and the conductive material may be in electrical communication with the cartomizer electronic circuitry. The vaporizer may further include a printed circuit board housed in the battery segment and in electrical communication with the battery electrical circuitry, and the cartomizer may further include a sensor in electrical communication with the cartomizer electrical circuitry, and the printed circuit board is operable to process environment information received from the sensor when the cartomizer is inserted into the chamber. The mouthpiece may be detachably connected to the cartomizer body. The cartomizer may further include a basin for holding the vaporizable substance, and the heating element may be provided proximate to the basin in order to heat the basin.

With reference now to FIGS. 1 and 2, an embodiment of an electronic cigarette 10 is provided in accordance with the disclosure. Electronic cigarette 10 may include a battery portion connectable with a vaporization unit or cartomizer 200 for holding a vaporizable substance 300. The battery portion may include a battery housing segment 102 provided proximate to the first end 102A of the battery portion, and a

6

second cartomizer receiving segment 104 provided proximate a second end 104A of the battery portion. The battery portion may include an outer shell 106 for covering or protecting one or more of the components of battery portion 100 as may be internally provided as described herein. Outer shell 106 may be substantially constructed from metal, plastic, or any other known or to be developed material suitable for protecting internal components of electronic cigarette 10, including the electrical components described herein. Battery housing segment 102 and cartomizer receiving segment 104 may commonly share outer shell 106. A cartomizer chamber 108 may be provided within at least a portion of cartomizer receiving segment 104. A cartomizer 200 may be insertable into the cartomizer chamber 108 in accordance with embodiments of the disclosure. Shell 106 may cover cartomizer chamber 108 thereby protecting an inserted or received cartomizer 200.

Electrical components for operating electronic cigarette 10 may be provided within battery housing segment 102. A battery 110 may be provided in order to provide electrical power as may be required by various features of the electronic cigarette 10. In some embodiments, battery 110 may be disposable, such as an AA or AAA cell battery, while in other embodiments, battery 110 may be of a rechargeable type, for example a 13450 lithium ion battery, an 18650 2600 mAh lithium ion cell, or flat lithium ion 903180 cell rated at 2300 mAh. Multiple batteries 110 may be used in series to generate higher voltages capable of shortening times to achieve vaporization temperatures in the cartomizer 200. A printed circuit board (PCB) 112 may also be provided for controlling one or more functions of electronic cigarette 10. PCB 112 may be electrically connected to battery 110 through circuitry in order to direct current flow as required in accordance with the disclosure. PCB 112 may include one or more integrated circuit chips as well as a micro control unit. A boost chip may also be provided in order to amplify voltage with at least portion of circuitry, as may be required in order to accomplish various functions described herein. PCB 112 may include a light emitting diode (LED), a microcontroller, a plurality of capacitors, a plurality of transistors, and a plurality of resistors or any combination thereof. An accelerometer for sensing gravity shifts of electronic cigarette 10 may be further provided. The accelerometer may be operable to detect tilting or changes in orientation of battery portion 100, and PCB 112 may be accordingly operable to react to a shift in orientation detected by the accelerometer. For instance, electronic cigarette 10 including an accelerometer may be activated by shaking or inverting electronic cigarette 10. Any known or to be discovered circuitry or arrangement of the components of PCB 112 are contemplated within the disclosure in order to achieve the desired functions of electronic cigarette 10 as described herein.

A variety of indicator lights forming one or more illuminative indicators may be provided in embodiments of the disclosure. One such indicator may be a battery end indicator 114 provided as a ring extending about at least a portion of shell 106 at or proximate to first end 102A. In one such embodiment, battery end indicator 114 may be provided at or proximate to first end 102A and includes one or more LED lights having one or more colors. Each color may, for instance, indicate a status of electronic cigarette 10. The status may be associated with the power remaining of battery 110, an activation state of electronic cigarette 10, the heating level of an inserted cartomizer 200, or any other status which may be desirable to communicate to a user of electronic cigarette 10 through a light color. For instance,

when electronic cigarette 10 is activated such that a user is either actively inhaling cigarette 10, as described in accordance with disclosure, or cigarette 10 is in a state such that the user could inhale, indicator 114 may be red or reddish. In such an embodiment, battery end indicator 114 could extend about at least a portion of the first end 102A such that when indicator 114 emanates a red or reddish color a user may associate the red color at or proximate to first end 102A with the red glow of a lit cigarette. In another embodiment, an indicator ring may be provided to illuminate one or more colors associated with the charge or power state of battery 110. For instance, battery end indicator 114 may illuminate green or blue when the battery is operating with a sufficient charge, and yellow or red when the battery is operating with a low charge such that the user should consider charging battery 110, in accordance with the disclosure. A ring indicator 116 may be provided on or proximate to an activation button 118, which may function to activate cigarette 10 as described herein in accordance with the disclosure. While activation button 118 may be provided on the surface of outer shell 106, and ring indicator 116 may substantially circumference button 118. Ring indicator 116 may include one or more LED lights having one or more colors to indicate various statuses of electronic cigarette 10. Status changes of electronic cigarette 10, such as insertion of cartomizer 200, activation of electronic cigarette 10 by pressing button 118, or deactivation of electronic cigarette 10 by pressing button 118 an additional time may each result in a different associated and predetermined color. The activation of the appropriate LED light or lights may be controlled by PCB 112. In embodiments where button 118 is coplanar or aligned with the surface of outer shell 106, as described herein, ring indicator 116 may also be coplanar or aligned with button 118 and the surface of outer shell 106. Another indicator light may be provided at or proximate to cartomizer end 104A. In one embodiment, in order to transmit a lighting effect from the battery segment 102, where battery 110 and PCB 112 may be housed, to the cartomizer end 104A, one or more LED lights may be provided in the cartomizer receiving segment 104 at or proximate to the battery segment 102. One or more clear tubes or optic fibers may be also be provided within or just below the surface of outer shell 106, with the tubes or fibers terminating at or proximate to the cartomizer end 104A. The resulting effect is an attractive, illuminative effect where the LED lights provided in the cartomizer segment are projected into and transmitted along the fibers. PCB 112 could potentially alternate or change the LED light colors projected into the fibers. The color alternation could be periodic, creating a steady change of colors, or the color alteration could be responsive to a status change of the electronic cigarette 10.

In order to provide an electrical connection between PCB 112 and an inserted cartomizer 200, an electrical connector 120 may be provided and may include a plurality of pogo pins 120. Pogo pins are devices used to establish connections between two circuits, and each may take the form of a cylinder containing one or more spring-loaded pins 122, each retractable upon compression, for instance by cartomizer 200 when it is inserted in cartomizer chamber 108. In one such embodiment, three pogo pins 122 may be provided, one for establishing positive current connection, one for establishing a negative current connection, and one for establishing a ground current connection. Each pogo pin 122 may be connected to PCB 112, which may control current outputted to pogo pins 122. For instance, PCB 112 may operate to vary or intermittently activate current flow to connector 120, the variation thereby regulating the activa-

tion of a heating element in a connected cartomizer. When cartomizer 200 is not received in cartomizer chamber 108, a head portion of each pogo pin may extend into cartomizer chamber 108. When cartomizer 200 is received in cartomizer chamber 108, the pins 122 are contacted and at least partially compressed into battery portion 102. Pins 122 may be contacted or pressed against electrical receivers provided on cartomizer 200 as described herein, thereby establishing an electrical connection between PCB 112 and cartomizer 200. Additional pins 122 are contemplated in embodiments of the disclosure, such as a fourth pin for providing an electrical connection to another element, such as the LED lights described above or a temperature sensor 260 described herein and illustrated in FIG. 2.

An additional embodiment of connector 120 may operate to identify information from an inserted cartomizer 200 based on voltage drop over one or more pins 122. For instance, connector 120 may include a controlling pin 122 from which connected PCB 112 may detect variations in voltage drop across the pin when connected to various types of cartomizers 200. Circuitry provided within a first type of cartomizer 200 may effectuate a first voltage drop over a controlling pin 122, while circuitry provided within a second type of cartomizer 200 may effectuate a second voltage drop over controlling pin 122 when cartomizer 200 is inserted in chamber 108. If PCB 112 detects a first voltage drop, the cartomizer 200 is identified as a first type of cartomizer, whereas if PCB 112 detects a second voltage drop, the cartomizer is identified as second type of cartomizer. A first cartomizer type may hold a first type of vaporizable substance 300, while a second cartomizer type may hold a second type of vaporizable substance 300. In one embodiment, connector 120 includes three pins 122: a positive pin, a ground pin, and a controlling pin. A controlling pin may also serve a dual function in that communication between a sensor 260 may also occur through a controlling pin 122. Other known or to be developed devices or connectors are contemplated within the disclosure for establishing an electrical current between PCB 112 and cartomizer 200.

Various features may be further provided in embodiments of electronic cigarette 10 in order to secure and align cartomizer 200 within cartomizer chamber 108. For instance, at least one magnet 124 may be provided in or proximate to chamber 108. A magnet 202 of opposing polarity to magnet 124 may be placed on a surface of cartomizer 200 so as to secure cartomizer 200 within chamber 108 when magnets 124, 202 (see FIGS. 1A, 1B) contact each other. It should be understood and appreciated that, in some embodiments, battery portion magnet(s) 124 may attach to cartomizer metallic surface(s) 202 and, conversely, cartomizer magnet(s) 202 may attach to battery portion metallic surface(s) 124, thereby establishing a magnetic connection between battery portion 100 and cartomizer 200. Other known or to be discovered means of securing cartomizer 200 in cartomizer chamber 108 are contemplated within the disclosure, including but not limited to, snap fit connectors, friction fit, threaded insertion of cartomizer 200 into chamber 108, a suction fit using pressurized means or any other suitable method of securing known or to be developed in the art.

One or more alignment features or mechanism may be included in order to ensure proper placement of cartomizer 200 in cartomizer chamber 108. In one embodiment, two magnets 124 may be provided proximate to connector 120 (see FIG. 1A), each magnet 124 having an opposed polarity. In this embodiment, two cartomizer magnets 202 (see FIG. 1B) may be provided of opposing polarity at an insertion end

210 of cartomizer 200. Because of the opposing polarities of magnets 124/202, the cartomizer 200 may only be inserted and secured in one direction or orientation, thereby facilitating alignment of cartomizer 200 within chamber 108. An alignment protrusion or peg 126 (see FIG. 1C) may be provided on a portion of an interior surface of chamber 108, and an alignment slit or slot 204 may be provided on a portion of cartomizer 200. Alignment protrusion 126 may be dimensioned to fit or slid along slit 204 so that cartomizer 200 may only be inserted in a particular, proper orientation. In another embodiment, a slit, crevice, or cutout may be provided on a portion of shell 106, with a matching protrusion provided on a portion cartomizer 200. For instance, a cutout may be provided on an upper rim of shell 106 at cartomizer receiving segment 104, while a matching protrusion may be provided on a portion of cartomizer 200 proximate to insertion end 210, with battery portion cutout engageable with the cartomizer protrusion when the cartomizer is properly aligned so as to ensure proper orientation of cartomizer 200 within chamber 108. Ensuring cartomizer 200 is properly oriented within chamber 108 in turn ensures proper contacting of cartomizer 200 with connector 120, and therefore proper functioning of electronic cigarette 10.

One or more windows 130 may be provided in outer shell 106 (see FIG. 1). Windows 130 may be made of a translucent material, such as glass or substantially clear plastic, in order to view internal components of battery portion 100. Window 130 may also be a slit cut into shell 106. For instance, in one embodiment, window 130 may be provided on or proximate to cartomizer receiving segment 104 and, more particularly, cartomizer chamber 108 so as to permit a user of electronic cigarette 10 to view the cartomizer 200 when it is inserted into cartomizer chamber 108.

One embodiment of cartomizer 200 for holding vaporizable material 300 is cartomizer 200A for holding a vaporizable fluid 300A, an embodiment of which is illustrated in FIG. 1. Vaporizable fluid 300A may be, for example, any known or to be developed fluid useful to vaporize, for inhalation nicotine, flavor or other desired ingredients in an electronic cigarette, such fluids include propylene glycol (PG), vegetable glycerin (VG), or polyethylene glycol 400 (PEG400), as well as their mixtures to which a flavor and/or nicotine has been added. Cartomizer 200A may be substantially elongate and insertable into chamber 108. Chamber 108 is defined by outer shell 106 and electrical connector 120. An insertion end 210 of cartomizer 200A, defined opposite of a mouthpiece end 212, may be inserted into the chamber first and may ultimately contact or be positioned proximate to connector 120 of battery portion 100. Cartomizer 200A may include a body 208 for holding fluid 300A. At least a portion of body 208 may be composed of translucent or substantially translucent material, such as glass or plastic, so that a user may see fluid 300A held within. The portion of body 208 composed of translucent material may be alignable with window 130 and may be proximate to LED lights or fiber optics so as to illuminate cartomizer 200A as it is inserted into chamber 108. The illumination may occur automatically upon insertion, or may be programmed to illuminate upon activation or manipulation of a switch, such as button 118.

In order to vaporize fluid 300A, a heating element 214 and a wicking element 216 may be provided within cartomizer body 208. An electrical current may be transmitted to heating element 214 through circuitry in electrical communication with electrical contacts, which contact pins 122 (see FIG. 1A) when cartomizer 200A is inserted into chamber 108. Once fluid 300A is heated to an optimal vaporizing

temperature, the user may inhale the vaporized fluid 300A through a mouthpiece 220 provided on body 208 at or proximate to mouthpiece end 212. The vaporized fluid may travel through an inhalation tube 222 in fluid connection with heating element 214 and wick 216. Inhalation tube 222 may also be in fluid communication with one or more holes or ducts provided, for instance, in sides of outer shell 106 in order to permit air flow through cartomizer body 208. The electrical current transmitted to heating element 214 may be controlled by PCB 112 through connector 120 when cartomizer 200A is inserted into chamber 108. The electronic cigarette 10 may be manually controlled, as a user may press button 118 to initiate a charge to heating element 214, which in turn may heat fluid 300A to a vaporized temperature which a user may inhale through mouthpiece 220. An automatically heating version of electronic cigarette 10 is also contemplated with disclosure, where a pressure switch integrated with connector 120 may activate current flow from PCB to heating element 214 rather than by manual activation from switch 118.

So that a user may refill fluid 300A held in body 208, mouthpiece 220 may be removable from body 208. Mouthpiece 220 may include a screw thread 224 so that mouthpiece 220 may be threadably engaged with mouthpiece end 212 of body 208 or, alternatively, may be press fit onto or into mouthpiece end 212 of body 208. A bushing 226, which may be a ring formed from plastic, rubber, or any other suitable material, may be provided to help stabilize and retain cartomizer 200 tightly fit in chamber 108. Additionally, a colored ring or logo 228 may be provided about a portion of cartomizer body 208 in order to identify the type or cartomizer being used.

With reference now to FIGS. 2, 2A and 2B, an additional embodiment of cartomizer 200B is provided for holding a dry vaporizable material 300B, such as dry tobacco. A container 240 may be provided within cartomizer body 208. Container 240 may be made from a material having a high thermal conductivity, such as metal, in order to transmit heat from a heating element 214A provided about at least a portion of container 240. In that at least a portion of heating element 214A may be provided about at least a portion of container 240, the material 300B provided within container 240 may be heated from multiple sides, similar to an oven, as opposed to from a single concentrated heat source. As an electrical current is transmitted to heating element 214A, the interior of container 240 may be heated to a desired vaporizing temperature. Heating element 214A may be substantially comprised of a non-conductive material, such as a polyimide flex harness material, with a conductive material, such a copper or other metal wiring shaped into a wire or flat ribbon, dispersed throughout the non-conductive material. The conductive material may be intertwined or wound throughout the non-conductive material in order to increase the heated surface area as well as to increase the impedance of the conductive material, which may then be electrically connected to PCB 112 through connector 120 when cartomizer 200B (See FIG. 2) is inserted in cartomizer chamber 108 (See FIG. 1). The impedance value of the conductive material may be 2-3 ohms in some embodiments, and in one embodiment a maximum of 1 ohm. In some embodiments, heating element 214A may be provided around the majority of cartomizer body 208, and in some embodiments heating element 214A may be provided proximate to only a portion of cartomizer body 208. For instance, heating element 214A may be provided only proximate to insertion end 210, in order to provide a greater portion of heating through convection rather than through conduction. In some embodi-

11

ment, heating element 214A may be provided about all or the majority of body 208, and PCB 112 may be operable in order to vary the amount of heating provided through convection rather than conduction. For instance, only the portion of heating element 214A proximate to insertion end 210 may be activated in order to heat vaporizable substance 300B through convection, or all or nearly all portions of heating element 214A may be activated in order to increase the conduction heating of substance 300B. PCB 112 may operate to switch between a conduction heating and a convection heating.

An insulating material 242 may be further provided within body 208 in order to control or regulate the heat distribution. Insulating material 242 may be provided around at least a portion of the exterior of heating element 214A in order to insulate body 208 from excess heat temperature, which may transmit to outer shell 106 (See FIG. 1). Insulating material 242 may also be provided between heating element 214A and container 240 so as to regulate or control heat transmitted to container 240.

One or more screens 250 may be provided within body 208 in order to contain dry material 300B within container 240, as well as to filter circulated air. Air may be circulated by providing one or more holes 252 in the cartomizer body 208. In one embodiment, holes 252 form a "t" shape (See FIG. 2B) from which the center of the "t" is substantially aligned with a hole leading to container 240. Holes 252 may be capable of alignment with one or more holes on the outer shell 106 of battery portion 100 so that air from the environment may pass through holes 252 and into container 240 where material 300B is provided. Holes 252 may be provided proximate to the inserted end 210. Screens 250 may be provided either at or proximate to inserted end 210, mouthpiece end 212, or both. In some embodiments, container 240 is removable from the rest of cartomizer body 208. Mouthpiece 220 may be removable or detachable, for instance through a screw thread, so as to permit access to container 240. An upper screen 250 may be attached or manufactured integrally with mouthpiece 220 so as to be removed with mouthpiece 220.

A sensor 260 may be included in some embodiments of cartomizer 200. Sensor 260 may operate to sense vaporizing temperature, and may be electronically communicative with PCB 112 so as to provide sensory information to PCB 112, which may be consequently transmitted to one of the LED indicators provided in electronic cigarette 10 as described in accordance with the disclosure. For instance, indicator 118 (See FIG. 1) may illuminate a certain color when sensor 260 has detected that vaporization temperature in container 240 has been reached and the user may proceed to inhale vaporized material 300. PCB 112 may also including safety protocols for automatic shutoff in the event that sensor 260 records a temperature above a preset vaporization temperature range, which may indicate material 300 (including, for example, 300A, 300B, 300C) is actively burning or about to burn. Thus, sensor 260 may operate as a thermistor. A vaporization range for many materials 300 may be between about 190 degrees Celsius and about 240 degrees Celsius, and in some embodiments the vaporization temperature may be at about 230 degrees Celsius. In this vaporization temperature range, active ingredients of the vaporization material 300 may begin to vaporize without actively burning, which may occur at about 400 degrees Celsius or higher for some materials. PCB 112 may operate to control the vaporization temperature, for instance regulating a maximum vaporization temperature or controlling the vaporization actual temperature. In one embodiment, PCB 112 may

12

control or regulate vaporization temperature within 10 degree Celsius, and in another embodiment PCB 112 may more finely control or regulate vaporization temperature within 1 degree Celsius, based on a selected or desired vaporization temperature as inputted by a user of electronic cigarette 10. It should be understood and appreciated that communication between sensor 260 and PCB 112 may be bidirectional so that sensor 260 may operate to control at least portions of vaporizer functions or to transmit information to PCB 112 and additionally receive information from PCB 112, which operates to control electronic cigarette 10.

As shown in FIG. 3, a charger 400 may be inserted into chamber 108 (FIG. 1) in order to charge battery 110 (FIG. 1) in embodiments where battery 110 may be rechargeable. Through its insertion into chamber 108 and contact with connector 120, charger 400 may provide an electrical charge to battery 110. Charger 400 may include a plug 410 for connecting charger 400 to a power source, which in one embodiment is a wall socket. Other plugs 410 for different power sources are contemplated within the disclosure, including USB connections and other known or to be developed power sources. An indicator light 420, which may be an LED light, may be provided on charger 400 in order to indicate a charging status, for instance when charger 400 is connected with a power source. PCB 112 may operate to change other indicators, for instance LED indicators 114/116, to indicate the charging status of electronic cigarette 10. In accordance with the disclosure, and illustrated for instance in FIG. 9, charger 400 may be connectable to battery portion at or proximate to first end 102A. Furthermore, as also illustrated for instance in FIG. 9, charger magnets 404 are contemplated within the disclosure in order to securely couple charger 400 to battery portion 100. In one embodiment, a metallic surface 404 is provided and positioned so as to be adjacent to magnets 124 or magnets 162 (depending on the embodiment of the disclosure). In another embodiment, a metallic surface 124 or 162 in order to magnetically couple battery portion 100 with charger magnets 404. Additionally, charger magnets 404 may be provided having opposing polarities as battery portion magnets 124 or 162.

FIGS. 4-7 further illustrate the embodiments of electronic cigarette 10 provided in FIGS. 1-3, in accordance with the disclosure.

FIGS. 8 and 9 illustrate an additional embodiment of an electronic cigarette 10 having a battery portion 100A for receiving a cartomizer such as cartomizer 200 or cartomizer 200B. PCB 112 may operate to perform a variety of functions including, such vaporization temperature control or regulation, voltage boost, accelerometer, or various drivers for controlling LED functioning. One or more LED indicators 114 may be provided and, in one embodiment, a set of three LED lights of variable colors are provided proximate to battery end 102A of the battery portion 100A. Magnets 124/202 may be provided in order to retain cartomizer 200 within cartomizer chamber 108. A switch 118A may be provided in order to manually activate or otherwise control electronic cigarette 10.

A battery charger 400A, having charging contacts 402, may be attached or connected to charging contacts 160 provided on outer shell 106, or otherwise exposable to the environment. In one embodiment, charging contacts 160 are positioned at or proximate to battery end 102A. Charging contacts 160, 402 may include a first positive contact and a second negative contact. In order to secure charging contacts 160 against corresponding charging contacts 402 of charger 400A, one or more magnets 162 may be provided proximate

13

to charging contacts 160. Magnets 162 may then be capable of engaging with charger magnets 404 provided on portion of charger 400A such that magnets 162, 404 are adjacent to each other when contacts 160, 402 are contacting one another. In order to ensure the proper alignment of contacts 160, 402, two magnets 162 may be provided with opposed polarities, and two charger magnets 404 may be provided with opposed polarities. These opposed polarities may ensure proper orientation of charger 400A when it is connected to battery portion 100A. In some embodiments, battery portion magnet(s) 162 may operate to magnetically attract and connect a metallic charger surface 404, or charger magnets 404 may operate to magnetically attract and connect a metallic battery surface 162, each of these embodiments thereby operating to magnetically couple charger 400 with battery portion 100. An indicator light 420, which may be an LED, may be provided to indicate a charging status of battery 110. A charging extension 410 may be provided so as to connect charger 400A to a power source or, alternatively, a power source may be internally provided within charger 400A. Charging extension 410 may be an AC wall adapter to USB and USB cord to magnetic plug. Any charger 400 of the disclosure may contain OverVoltage and OverCurrent protection in order to prevent over charging of battery 110 thereby assuring long battery life and in order to reduce the likelihood of battery 110 overheating. In one embodiment, charger 400 is rated at approximately 1000 mA current, which for some embodiments will equate to approximately two hours of battery life. The battery life will vary depending on battery selection and number of batteries 110 used in a given embodiment.

Referring now to FIG. 10, an embodiment for a cartomizer 200C is provided for holding a vaporizable substance 300. Cartomizer 200C may be used as an alternative cartomizer to 200/200B cartomizers, for example. Vaporizable substance 300 in cartomizer 200C may be a wax, oil or gel 300C. In cartomizer 200C, heating element 214 may be provided at the base of a basin 214B, which may or may not be removable from cartomizer body 208. Basin 214B may be dimensioned to hold wax, oil or gel 300C while heating element 214 may elevate the temperature within basin 214B to a vaporization temperature range, as controlled by PCB 112. Once the wax, oil or gel 300C is vaporized, a user may inhale the vapor through an inhalation tube 222 and out through mouthpiece 220. In some embodiments, mouthpiece 220 is removable through a friction fit, threaded connection, or any other known or to be developed connection means. One or more O-ring seals may also be provided proximate to the mouthpiece to ensure a fluid tight connection between mouthpiece 220 and cartomizer body 208.

FIG. 11 shows an additional embodiment of a cartomizer 200D for holding a dry vaporizable substance 300B. Cartomizer 200D may be used as an alternative cartomizer to 200/200B cartomizers, for example. Dry substance 300B may be held in a removable liner or container 240. Cartomizer 200D may also include heating element 214A and insulation material 242, each of which may be similarly provided and oriented as previously described with respect to cartomizer 200B. An air flow hole or aperture 270 may be provided at the base of cartomizer 200D. This airflow hole 270 may be provided off plane or misaligned with respect to electrical contacts 218. Airflow hole 270 may align with a hole between chamber 108 and battery portion 100A, which may house a fan 190 as described below. A temperature sensor 260 may also be included.

14

FIG. 12 further illustrates the embodiments of an electronic cigarette 10 provided in FIGS. 9-11 in accordance with the disclosure.

Referring now to FIG. 13, an embodiment of an electronic cigarette 10 including a battery portion 100B is provided. PCB 112 may include a microcontroller, voltage boost integrated circuit, accelerometer, and a Fan control circuitry. A fan 190, including blades and a motor, may be provided internally in battery segment 110 of battery portion 100B. Fan 190 may operate to facilitate air flow from external battery portion 100B, such as through one or more holes 152 provided in outer shell 106, through battery segment 110 and into cartomizer thereby establishing an air flow for inhalation in accordance with the disclosure. In some embodiments, fan 190 has a reversible operation in order to "clear" the air flow path in the event debris or excess vapor is caught in the air flow path. PCB 112 may also include one or more switches that, for instance, may be provided beneath control buttons, such as that exemplified in FIG. 15). PCB 112 may also include one or more LED's for these and other similar switch lights. PCB 112 may also operate to display a status message on an LED screen, which may be provided on outer shell 106 (e.g., as shown in FIG. 15). A status message may, for example, include messages to indicate a status of the electronic cigarette 10, such as when the cigarette 10 is activated, charging, or has reached a vaporization temperature. An LED screen may also display warning or error messages, for instance a danger message when a critical temperature has been detected by a sensor. Further, as illustrated in FIG. 14. In some embodiments, PCB 112 may operate to recognize the cartomizer 200/200A/200B/200C inserted into chamber 108, and in order to identify the vaporizable substance 300 included in cartomizer 200. For instance, PCB 112 may communicate with sensor 260 in cartomizer 200 in order to identify both the type and amount of vaporizable substance 300 within cartomizer 200. This identification may be included in the status message displayable on the LED screen on outer shell 106. Charger 400A may be utilized for charging battery 110 in battery portion 100C. It should be understood and appreciated that, in some embodiments, charger 400A may be inserted into chamber 108 of battery portions 100A/100B in addition to connection of charger 400A as described herein. It should be further understood and appreciated that in embodiments where charger 400/400A is coupled with battery portion 100 at a position other than where cartomizer 200 is connected, such as embodiments where charger 400A is coupled at or proximate to first end 102A, electronic cigarette 10 may operate with a pass through function, namely the ability to operate electronic cigarette 10 while the unit is charging from charger 400A.

FIG. 15 further illustrates the embodiments of an electronic cigarette 10 provided in FIGS. 13-14 in accordance with the disclosure.

Certain charger embodiments for rechargeable vaporizers or electronic cigarettes disclosed hereinabove, for example in FIG. 3, employ electrical contacts between the charger and the cartomizer portion's electrical connector. Under these circumstances, the cartomizer portion is first removed from the chamber to expose the electrical connector and thereafter a charger with compatible electrical contacts is inserted into the chamber. The invention contemplates other types and locations of connectors on the vaporizer and charger. Accordingly, in certain embodiments, the present invention provides a charger 400 for charging a vaporizer or electronic cigarette having charging contacts attached essentially transversely to its outer shell at an end distal to the

15

cartomizer receiving portion and proximate to its battery portion. One such embodiment is shown in FIG. 14. In some of these embodiments where the cartomizer portion is not removed from the vaporizer to expose the electrical connector, the charging contacts are incorporated into the device such that the vaporizer or electronic cigarette may be operated in its typical fashion during the recharging of the battery ("pass-through" charging).

Still other embodiments for chargers and rechargeable vaporizers or electronic cigarettes are illustrated in FIGS. 16, 17, 18, 19, and 20. For example, FIG. 16 depicts aspects of the portion of the charger that connects with the vaporizer during the charging operation. In this example, the positive connection to the vaporizer's charging contacts is facilitated through the use of a spring-loaded pogo pin (see 501 and 502). The negative connection pin (503) or other negative connection is isolated from the pogo pin by an insulator 506 to isolate the positive and negative connections from each other. At the contacts insulator surface such that it is isolated from electrical connections 501 and 503 is a wiper contact that is capable of powering a LED charging indicator light. In some instances the exterior housing 504 for the charger is at least in part, translucent or transparent, so that the indicator lamp can be readily observed. To maintain readily removable connectivity with the vaporizer, a magnet 505 is provided, and is typically in proximity to the outer edges of the charger's charging contacts and optionally takes the form of a ring disposed in substantially concentric fashion about the assembly containing the electrical contacts and insulation. The charger is generally held in the correct position for charging by magnetic attraction to the vaporizer's charging contacts. The magnetic attraction strength is such that the charger can be easily detached by just pulling on the charger. This level of attractive force may also allow the charger to break away if it is pulled too far away from the battery portion of the vaporizer so that no significant damage will occur to the vaporizer or the charger. Other aspects of the charger include one or more of support pieces and/or fixing screws, for example. The materials employed in the construction of the charger would be readily understood by the ordinarily skilled artisan once equipped with the teachings of the present invention. Any material that conducts electricity will generally be acceptable where transfer of electricity to charge the battery is required. Similarly, where insulation is a necessary property for normal operation, electrically non-conductive materials are typically acceptable. FIG. 17 illustrating a perspective drawing of a charger that employs a USB terminus connection 507 as a source of power for the charging operation. At the end distal to the USB terminus are the charger's charging contacts for the vaporizer or electronic cigarette, including a pogo pin-type positive connection 501, an insulator 506, a negative connection 503, a magnet 505 and a housing 504.

FIG. 18 shows an alternate end on view of a charger's electrical contacts region, depicting a housing 504, magnet 505, negative connection 503, wiper contact 508 for an optional LED-type charging indicator light disposed on the housing, pogo pin-type positive connection 501, and insulator 506.

FIG. 19 illustrates a partial longitudinal cross section view of an embodiment of the vaporizer's electrical connector attached essentially transversely to its outer shell 512 at an end distal to the cartomizer receiving portion and proximate to its battery portion, which may be contacted with the chargers contacts illustrated in FIG. 18. FIG. 19 shows an arrangement of components for an embodiment of

16

present invention's electrical connector including a positive contact 509, negative contact 510, and insulation 511.

An alternative vaporizer electrical connector compatible with the charger shown in FIG. 18 is shown in FIG. 20 in an end on view. In this view, the positive contact 509 forms an innermost circle, surrounded by concentric circles of independently varying dimensions including an insulator 511, a negative contact 510, a magnet 513 and outer shell 512. In certain embodiments 513 may be a magnet or a magnetic material. In embodiments where 513 is a magnetic material, it is preferably magnetic metal, more preferably a ferromagnetic metal. The magnetic attraction between 513 and the magnet in the charger contacts is strong enough to hold the charger contacts and vaporizer charging contacts sufficiently so that the battery may be recharged. In certain preferred embodiments, the attraction is sufficiently strong to maintain the charger/vaporizer connection, but weak enough to be disconnected without substantial damage to the charger or the vaporizer.

FIG. 21 shows a perspective side on view of the FIG. 18 charger's electrical contacts region depicting a housing (504), magnet (505), negative connection (503), wiper contact (508), pogo pin-type positive connection (501), and insulator (506).

FIG. 22 shows the charger of FIG. 18 connected for recharging to the electrical connector of the vaporizer compatible with the charger shown in FIG. 20.

Vaporizer or electronic cigarette charger kits useful in, for example, the recharging of batteries used to power the vaporization process in such devices, are also within the ambit of the present invention. These kits typically include one or more chargers of the present invention, or alternatively a charger with multiple interchangeable power connectors (e.g., wall plug and USB connector). Such kits may further include, if desired, one or more of various compatible vaporizers or electronic cigarettes, their components, such as for example, one or more interchangeable cartomizers, cartomizer refills, etc., as will be readily apparent to those skilled in the art. Instructions, either as inserts or as labels, indicating quantities of the components contained in the kit, guidelines for operation or use, and/or guidelines for connecting any of the components and/or refilling the cartomizers, may also be included in the kit.

In accordance with certain embodiments of the present invention, there are provided methods which comprise contacting a charger of the present invention with a compatible vaporizer or electronic cigarette for a time and under conditions effective to recharge a rechargeable battery contained within said vaporizer or electronic cigarette sufficient to repower vaporizer or electronic cigarette for its continued use.

As will be understood by the ordinarily skilled artisan equipped with the disclosure herein, electrical contacts compatible with the charger must be provided for on or within the vaporizer or electronic cigarette.

The descriptions set forth above are meant to be illustrative and not limiting, and persons of skill in the art will recognize that various common and known deviations from the above described structures are considered to be within the scope of the disclosed concepts described herein.

The invention illustratively disclosed herein suitably may be practiced in the absence of any element which is not specifically disclosed herein. The invention illustratively disclosed herein suitably may also be practiced in the absence of any element which is not specifically disclosed herein and that does not materially affect the basic and novel characteristics of the claimed invention.

LIST OF REFERENCES

10 Electronic Cigarette
 100 Battery Portion
 100A Battery Portion
 100B Battery Portion
 102 Battery Housing Segment
 102A First end of Battery Portion
 104 Cartomizer Receiving Segment
 104A Second end of Battery Portion
 106 Shell
 108 Cartomizer Chamber
 110 Battery
 112 PCB
 112A PCB
 114 Indicator
 116 Ring Indicator
 118 Button
 118A Switch
 120 Electrical Connector
 122 Pin
 124 Magnet
 126 Protrusion
 130 Window
 152 Hole
 160 Charging Contact
 162 Magnet
 190 Fan
 200 Cartomizer
 200A Cartomizer
 200B Cartomizer
 200C Cartomizer
 202 Magnet
 204 Groove
 208 Body
 210 Insertion End
 212 Mouthpiece End
 214 Heating Element
 214A Heating Element
 214B Basin
 216 Wick
 218 Electrical Contact
 220 Mouthpiece
 222 Inhalation Tube
 224 Threading
 226 Bushing
 228 Colored Ring
 240 Container
 242 Insulating Material
 250 Screen
 252 Hole
 260 Sensor
 300 Vaporizable Substance
 300A Vaporizable Fluid
 300B Vaporizable Dry Substance
 300C Vaporizable Wax
 400 Charger
 400A Charger
 402 Electrical Contact
 404 Magnet
 410 Plug
 420 Light
 501 pogo pin
 502 spring
 503 negative connection pin
 504 exterior housing
 505 magnet

506 insulator
 507 USB terminus connection
 508 wiper contact
 509 positive contact
 510 negative contact
 511 insulation
 512 outer shell
 513 magnet or magnetic metal
 What is claimed:
 1. A vaporizer device comprising:
 a battery portion having an outer shell and a chamber defined by the outer shell; and
 a cartomizer having a mouthpiece end and an insertion end disposed opposite the mouthpiece end, the cartomizer comprising:
 a cartomizer body having a volume defined therein, the volume configured to hold a fluid vaporizable substance, wherein at least a portion of the cartomizer body comprises a translucent material configured to allow viewing of the fluid vaporizable substance, wherein the cartomizer body is configured for insertion into the chamber such that at least part of the volume is positioned in the chamber when the cartomizer body is inserted into the chamber;
 a heating element and a wicking element within the cartomizer body;
 an inhalation tube in fluid communication with the heating element and the wicking element;
 a mouthpiece at or proximate to the mouthpiece end, the mouthpiece in fluid communication with the inhalation tube; and
 a plurality of cartomizer electrical contacts on an exterior of the insertion end, wherein the plurality of cartomizer electrical contacts is positioned to contact a plurality of battery electrical contacts at a base end of the chamber when the cartomizer body is inserted into the chamber.
 2. The cartomizer of claim 1, wherein the translucent material comprises glass or plastic.
 3. The cartomizer of claim 1, wherein the portion of the cartomizer body composed of the translucent material is proximate to LED lights or fiber optics so as to illuminate the cartomizer body as the cartomizer body is inserted into the chamber.
 4. The cartomizer of claim 1, wherein the cartomizer further comprises a structure that secures the cartomizer in the chamber, and wherein the structure comprises a snap fit connector.
 5. The cartomizer of claim 1, wherein the cartomizer further comprises a structure that secures the cartomizer in the chamber, and wherein the structure comprises a cartomizer metallic surface configured to be attracted to at least one magnet in or proximate to the chamber.
 6. The cartomizer of claim 1, wherein the cartomizer further comprises a structure that secures the cartomizer in the chamber, and wherein the structure comprises a friction fit or a suction fit using a pressurized structure.
 7. The cartomizer of claim 1, wherein the inhalation tube is in fluid communication with one or more holes or ducts provided inside of the outer shell when the cartomizer body is inserted into the chamber.
 8. The cartomizer of claim 1, wherein the plurality of cartomizer electrical contacts is further configured to at least partially compress the plurality of battery electrical contacts when the cartomizer body is inserted into the chamber.
 9. A vaporizer device comprising:
 a cartomizer comprising,

19

- a cartomizer body configured to hold a fluid vaporizable substance, wherein at least a portion of the cartomizer body comprises a translucent material configured to allow viewing of the fluid vaporizable substance;
- a heating element and a wicking element within the cartomizer body; and
- a plurality of cartomizer electrical contacts on an exterior of the insertion end; and
- a battery portion, the battery portion having a first end and a second end and comprising:
- a battery housing segment proximate the first end of the battery portion; and
- a cartomizer receiving segment proximate the second end of the battery portion, the cartomizer receiving segment comprising a chamber defined by an outer shell of the battery portion, wherein a window is provided in the outer shell, and wherein the translucent portion of the cartomizer body aligns with the window when the cartomizer body is inserted into the chamber.
10. The vaporizer device of claim 9, wherein outer shell is commonly shared by the battery housing segment and the cartomizer receiving segment.
11. The vaporizer device of claim 9, further comprising a rechargeable battery in the battery housing segment.
12. The vaporizer device of claim 9, wherein the window comprises a slit cut into the outer shell.
13. A vaporizer device comprising:
- a battery portion having an outer shell and a chamber defined by the outer shell; and
- a cartomizer having a mouthpiece end and an insertion end disposed opposite the mouthpiece end, the cartomizer comprising:
- a cartomizer body having a volume defined therein, the volume configured to hold a vaporizable substance, wherein the vaporizable substance is in a fluid state, wherein the cartomizer body is configured for insertion into the chamber such that at least part of the volume is positioned in the chamber when the cartomizer body is inserted into the chamber;
- a heating element within the cartomizer body;
- cartomizer electrical contacts operable to direct current to the heating element, wherein the cartomizer electrical contacts are on an exterior of the cartomizer body; and
- a wicking element inside the cartomizer body, the wicking element configured to absorb the vaporizable substance;
- an inhalation tube in fluid communication with the heating element and the wicking element; and
- a mouthpiece at or proximate to the mouthpiece end, the mouthpiece in fluid communication with the inhalation tube.
14. The cartomizer of claim 13, wherein at least a portion of the cartomizer body comprises a translucent material configured to allow viewing of the fluid vaporizable substance.

20

15. The cartomizer of claim 13, wherein the vaporizable substance comprises a liquid comprising nicotine.
16. The cartomizer of claim 13, wherein cartomizer electrical contacts are positioned to contact a plurality of battery electrical contacts at a base end of the chamber when the cartomizer body is inserted into the chamber.
17. A vaporizer device comprising:
- a cartomizer comprising:
- a cartomizer body configured to hold a vaporizable substance, wherein the vaporizable substance is in a fluid state, wherein the cartomizer body is configured for insertion into a chamber defined by an outer shell of a battery portion of a vaporizer device,
- a heating element within the cartomizer body,
- cartomizer electrical contacts operable to direct current to the heating element, and
- a mouthpiece at or proximate to the mouthpiece end, the mouthpiece in fluid communication with the inhalation tube; and
- a battery portion, the battery portion having a first end and a second end, the battery portion comprising:
- a chamber of a cartomizer receiving segment, the chamber configured for receiving the cartomizer body, the cartomizer electrical contacts, and the heating element through an opening at a distal insertion end of the battery portion,
- a battery segment disposed between the cartomizer receiving segment and a battery end of the battery portion opposite from the distal insertion end of the battery portion, the battery segment comprising a battery,
- battery electrical contacts for completing a circuit with the cartomizer electrical contacts when the cartomizer electrical contacts are received into the chamber, the battery electrical contacts being coplanar, and
- an outer shell forming at least part of the chamber, wherein a window is formed in the outer shell to permit viewing of the cartomizer body when the cartomizer body is received into the chamber.
18. The vaporizer device of claim 9, wherein the cartomizer has a mouthpiece end and an insertion end disposed opposite the mouthpiece end, the cartomizer further comprises,
- an inhalation tube in fluid communication with the heating element and the wicking element; and
- a mouthpiece at or proximate to the mouthpiece end, the mouthpiece in fluid communication with the inhalation tube;
- wherein the plurality of cartomizer electrical contacts is positioned to contact a plurality of battery electrical contacts at a base end of the chamber when the cartomizer body is inserted into the chamber.

* * * * *