



US 20100060747A1

(19) **United States**

(12) **Patent Application Publication**
Woodman

(10) **Pub. No.: US 2010/0060747 A1**

(43) **Pub. Date: Mar. 11, 2010**

(54) **CAMERA HOUSING WITH INTEGRATED
EXPANSION MODULE**

Publication Classification

(76) Inventor: **Nicholas D. Woodman**, Pescadero,
CA (US)

(51) **Int. Cl.**
H04N 5/228 (2006.01)
H04N 5/225 (2006.01)
H04N 5/76 (2006.01)

Correspondence Address:
FENWICK & WEST LLP
**SILICON VALLEY CENTER, 801 CALIFORNIA
STREET**
MOUNTAIN VIEW, CA 94041 (US)

(52) **U.S. Cl. 348/222.1; 348/375; 348/372;
348/231.7; 348/E05.024; 348/E05.031**

(57) **ABSTRACT**


(21) Appl. No.: **12/498,890**

(22) Filed: **Jul. 7, 2009**

A camera housing includes an integrated expansion module for providing expanded functionality to a camera (e.g., a display screen). Different embodiments of the housing include different expansion modules for adding a variety of features to the camera when the camera is placed in the housing. Thus, a user may modify features of a camera by swapping the housing. Furthermore, a user may add a feature to an existing camera without needing to purchase a new camera.

Related U.S. Application Data

(60) Provisional application No. 61/078,756, filed on Jul. 7, 2008.

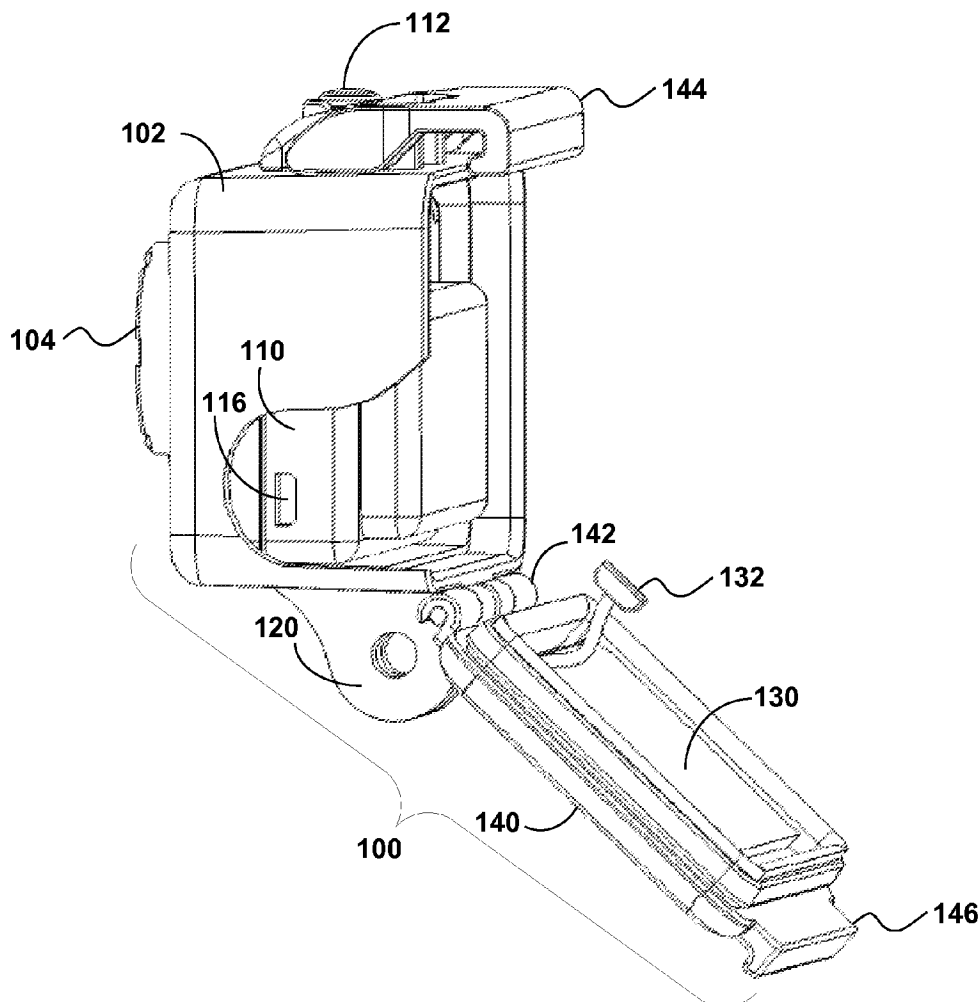

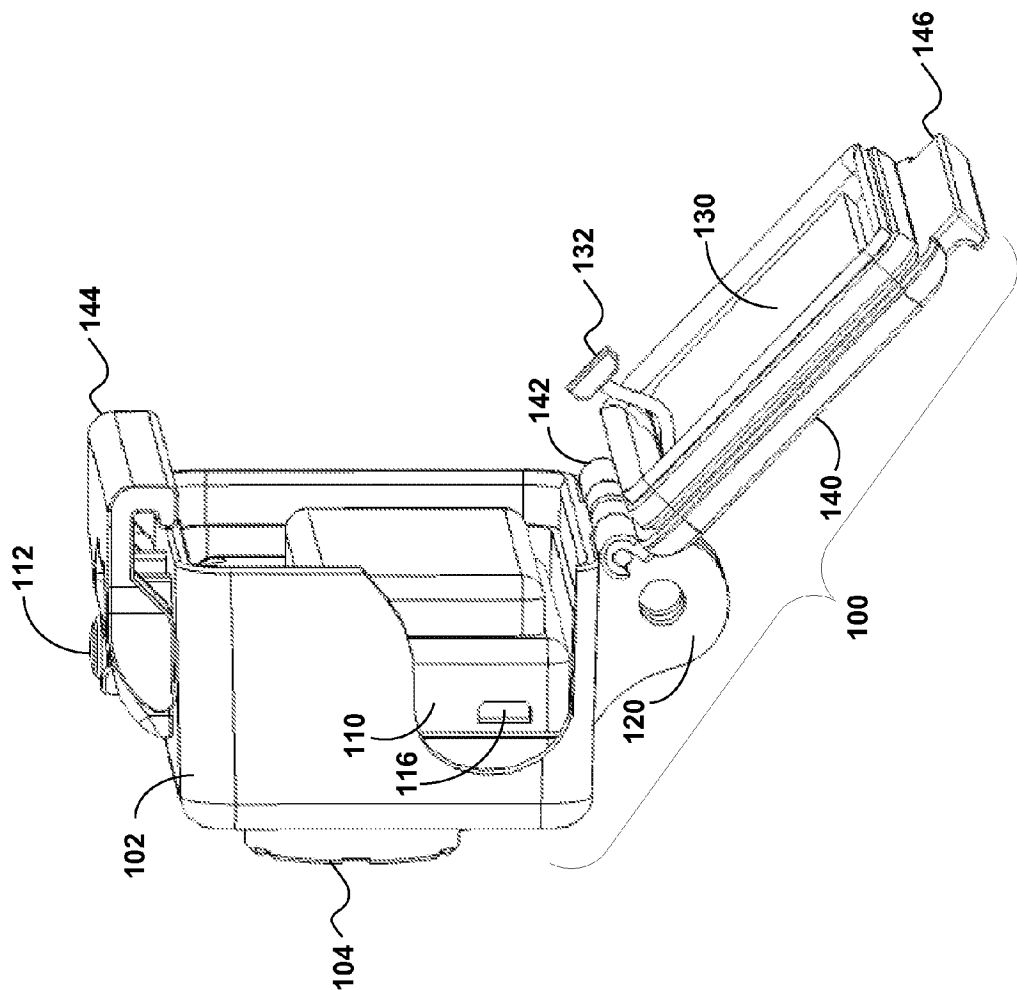
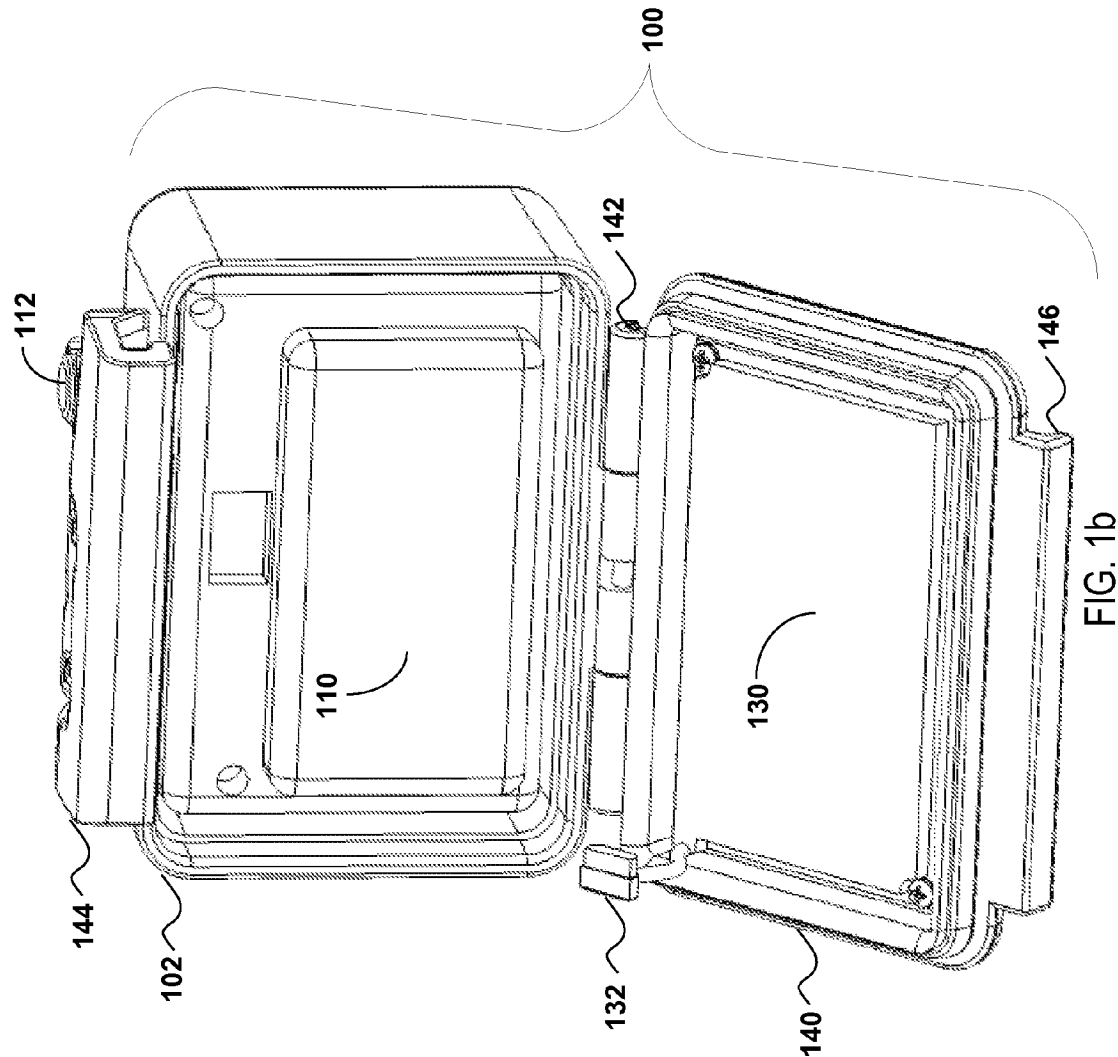
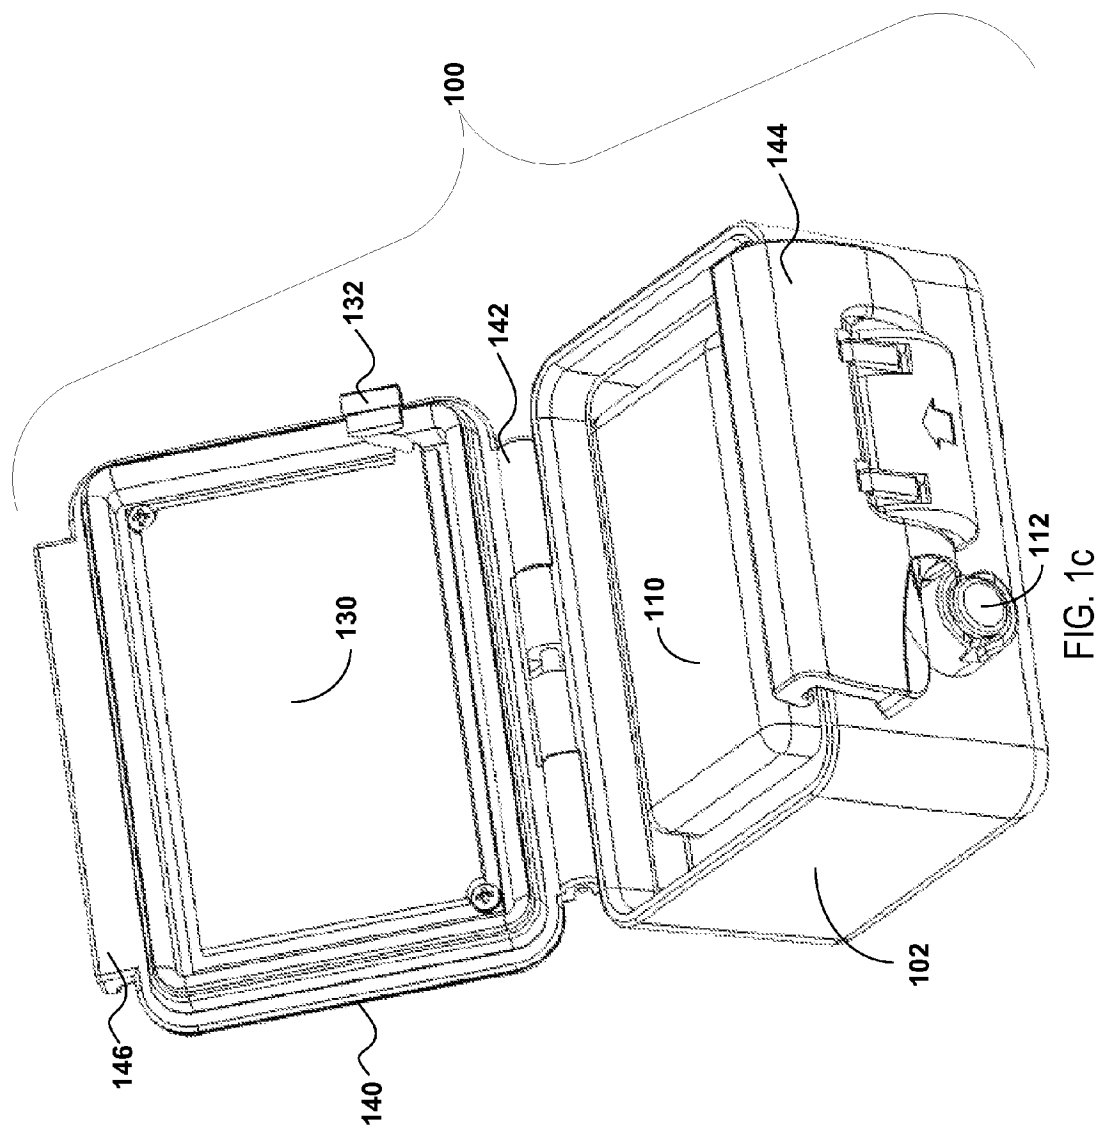


FIG. 1a





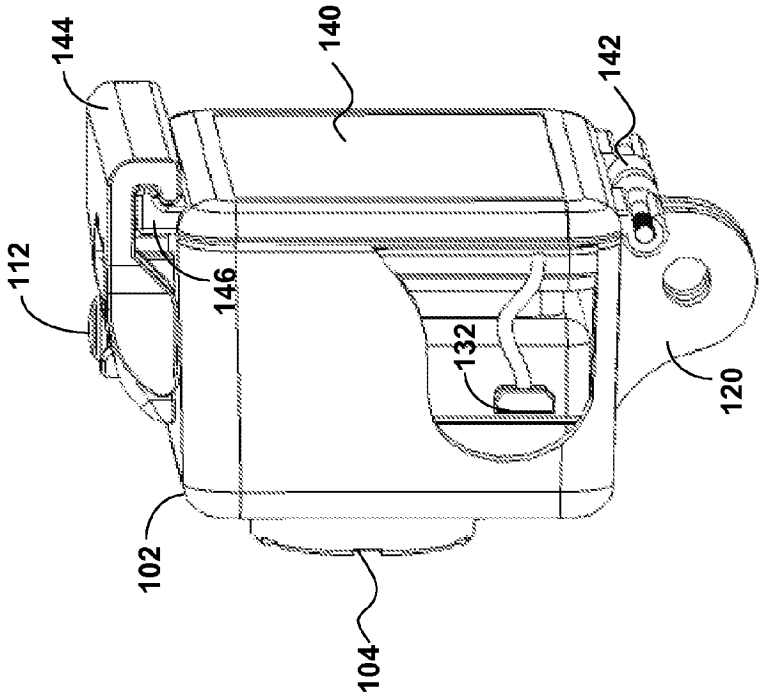


FIG. 2a

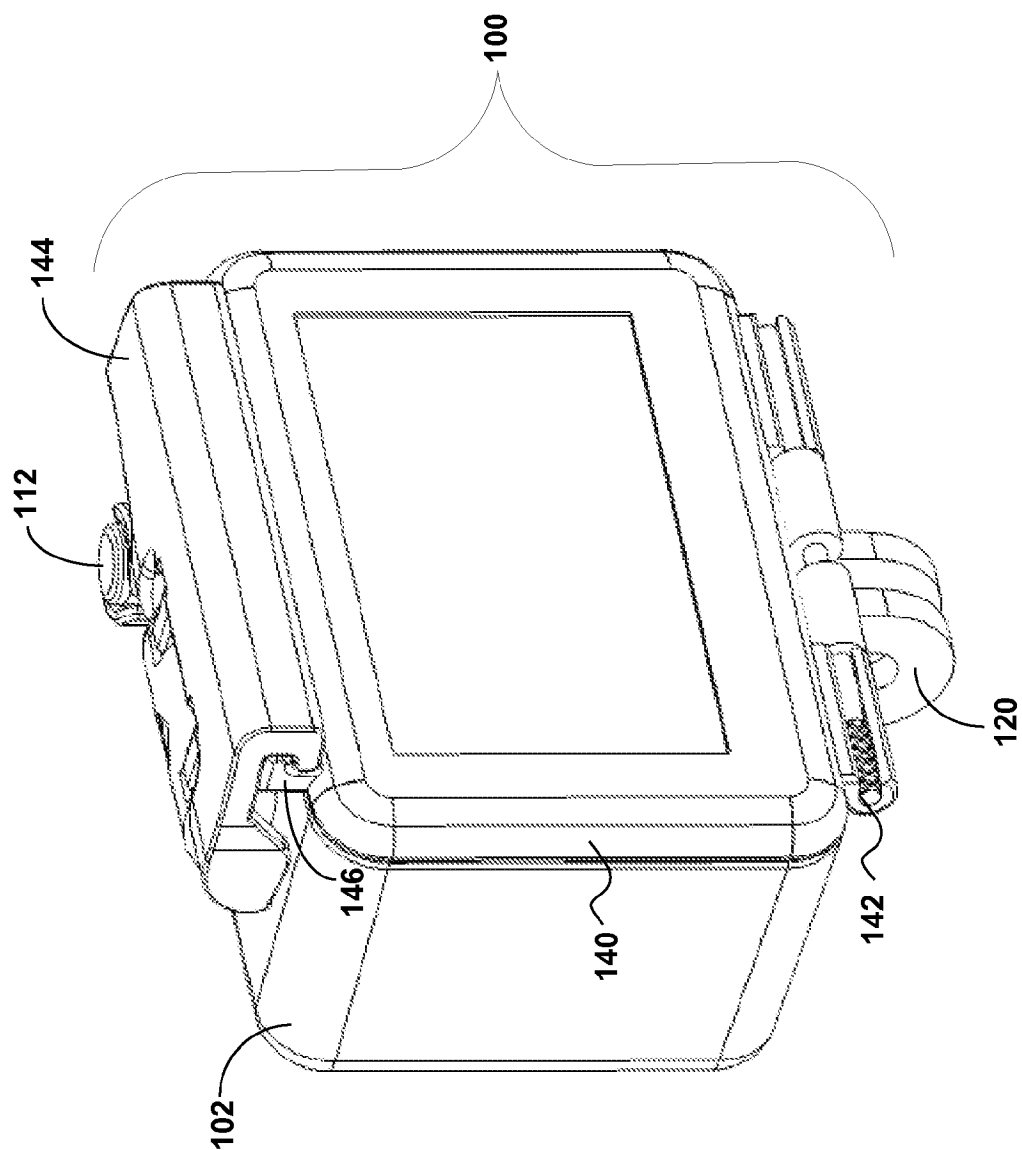


FIG. 2b

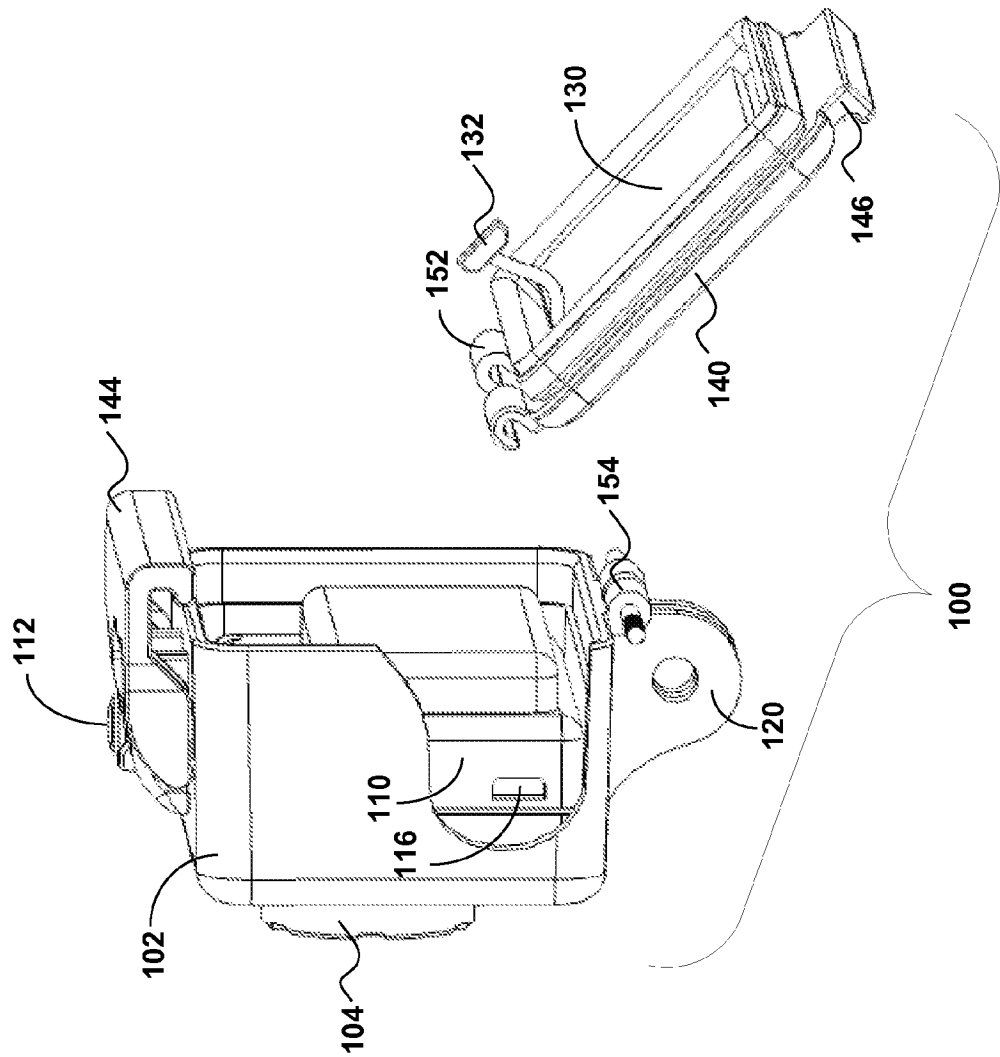


FIG. 3

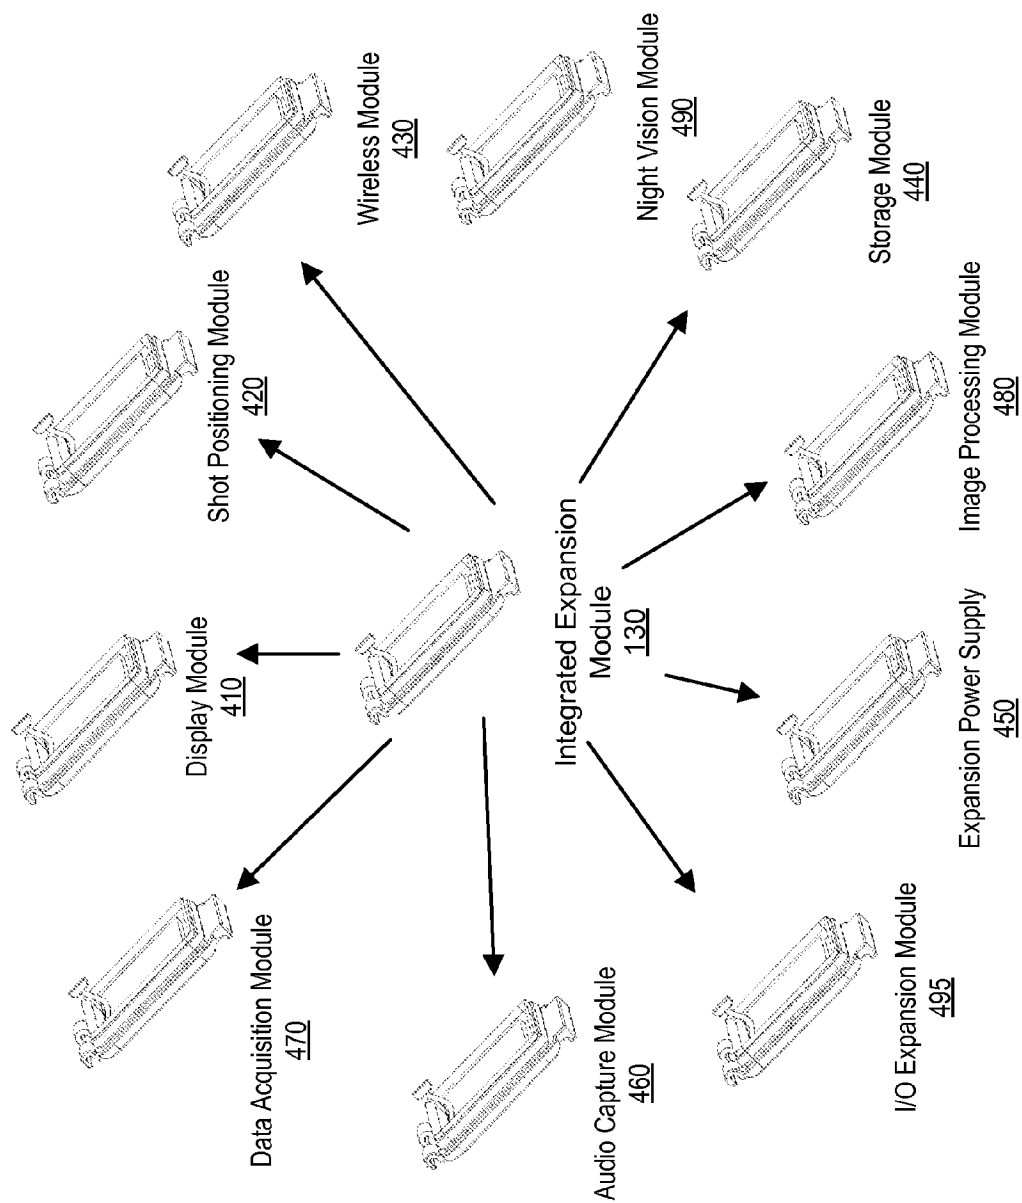


FIG. 4

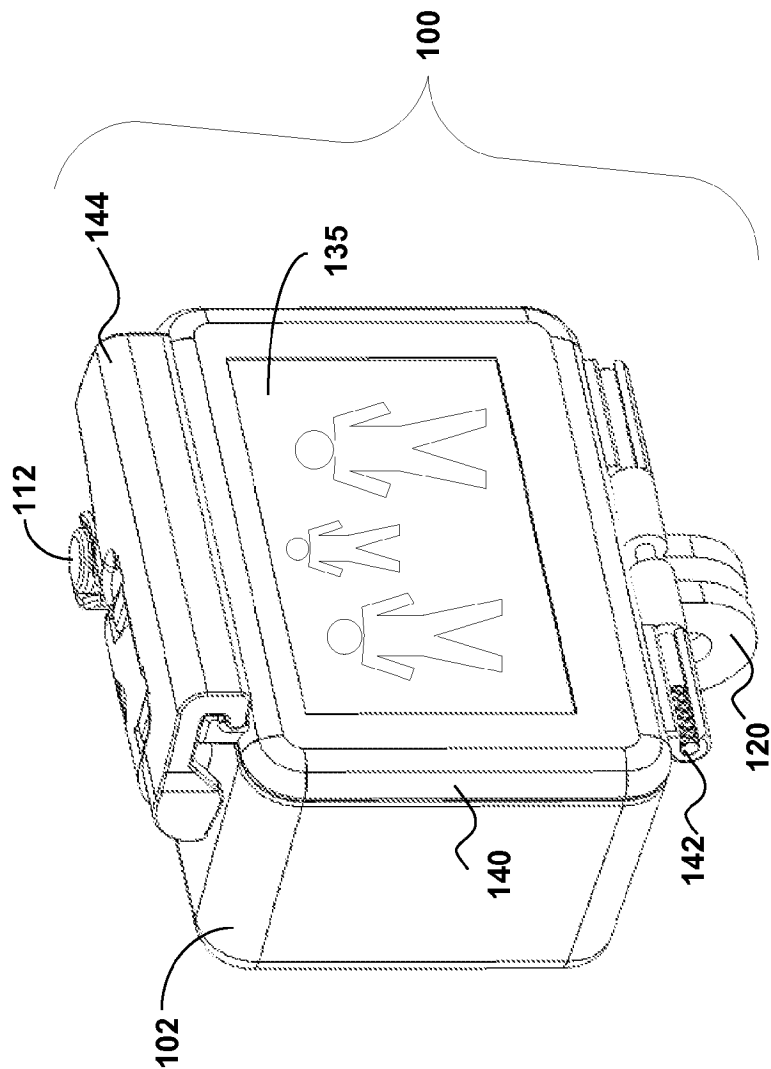


FIG. 5a

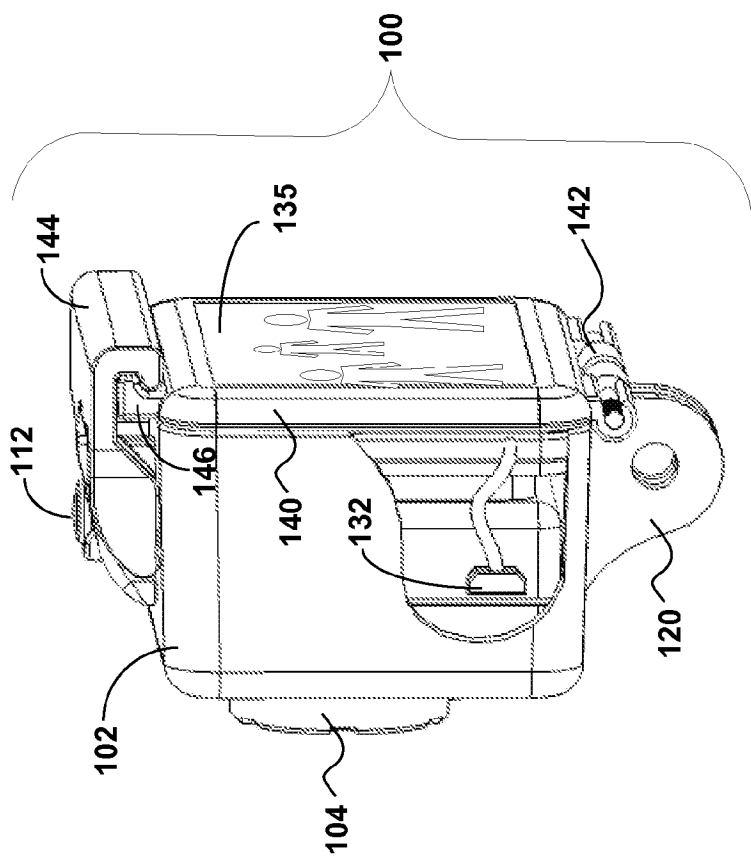


FIG. 5b

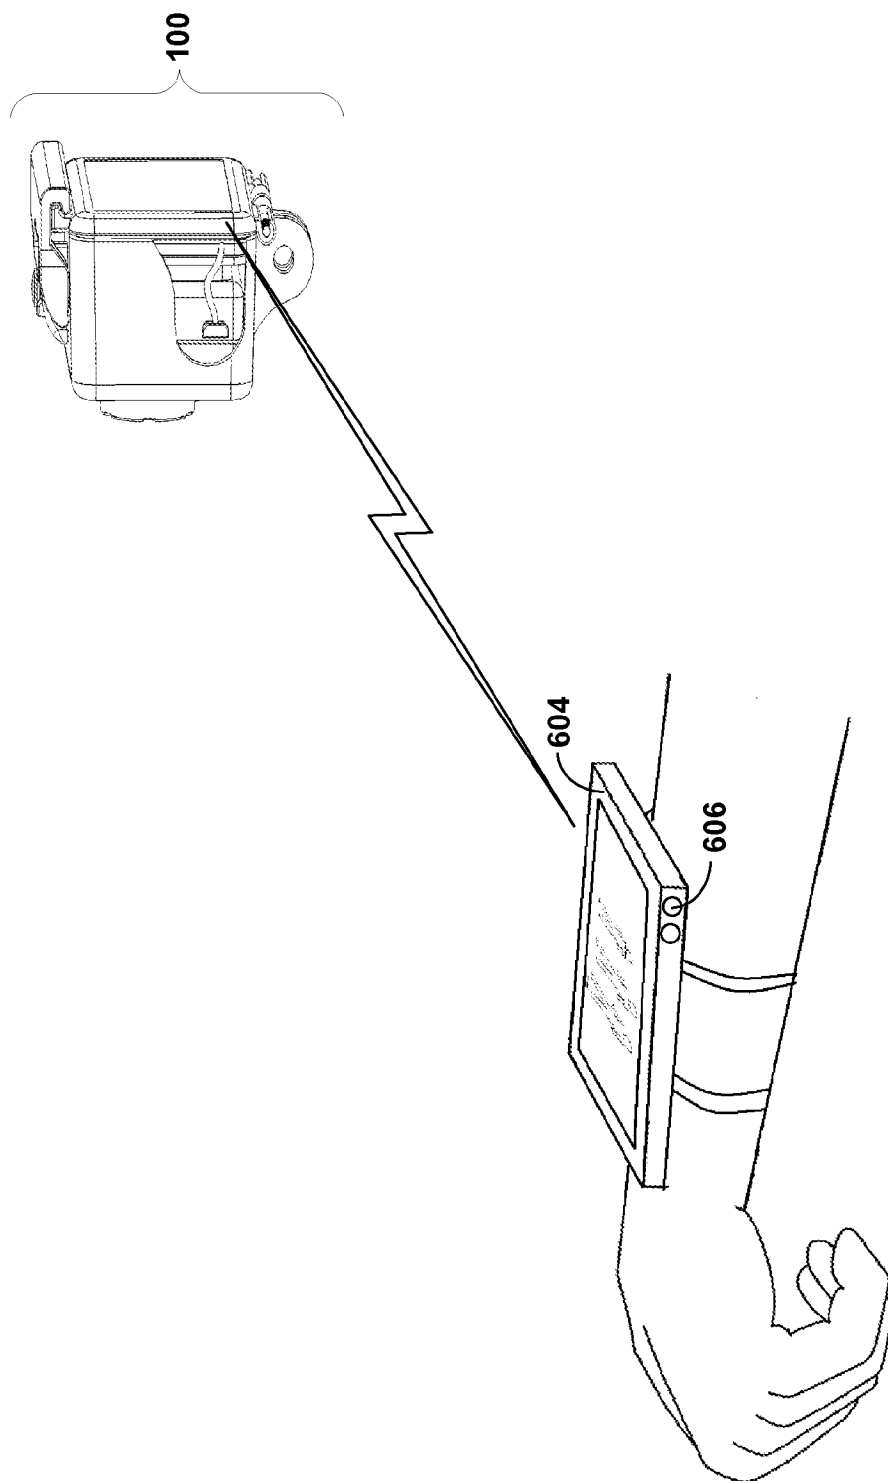


FIG. 6

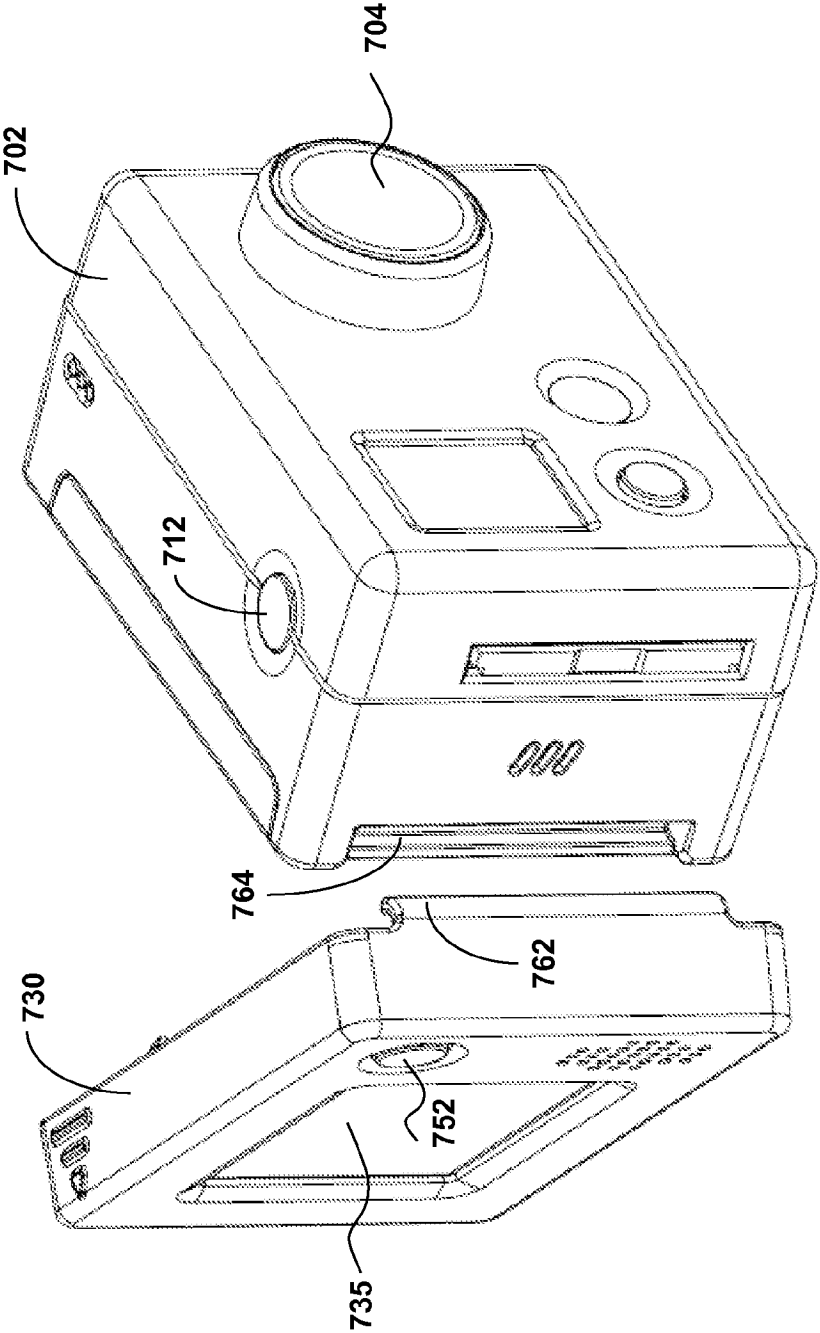


FIG. 7a

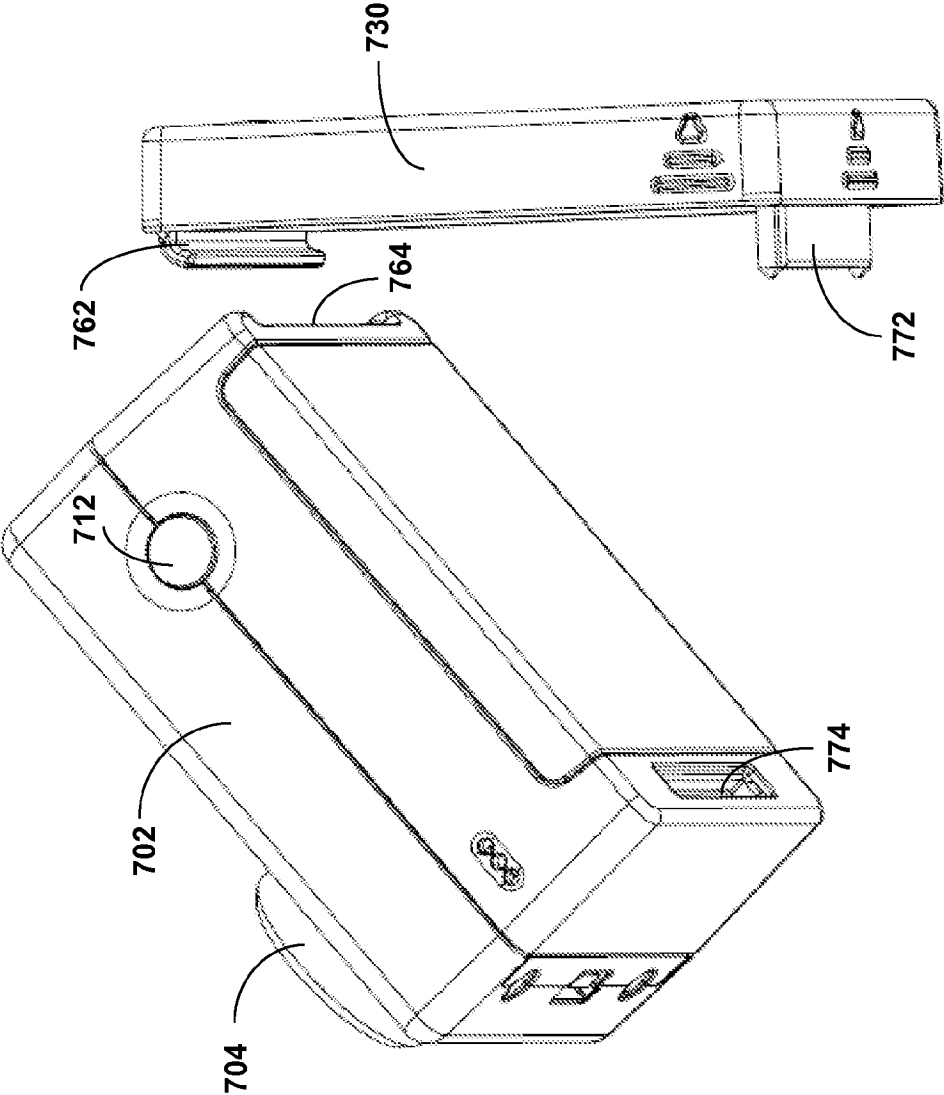


FIG. 7b

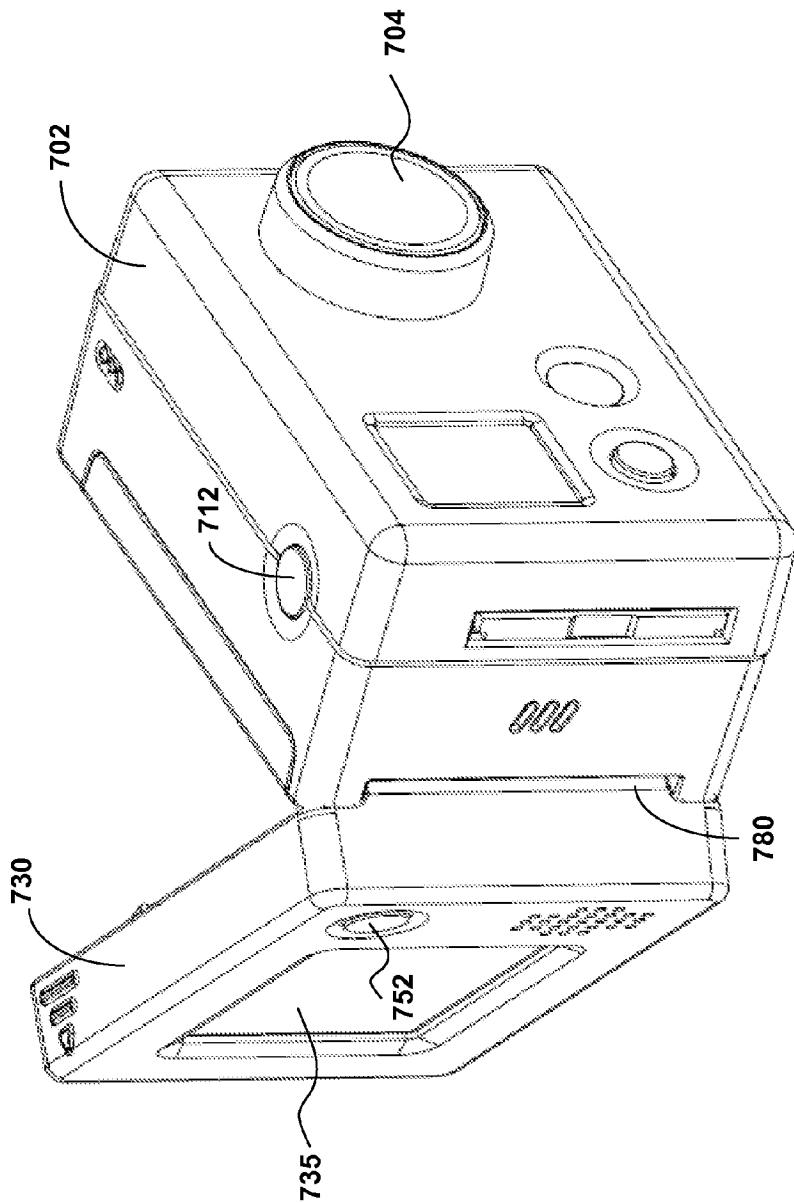


FIG. 8a

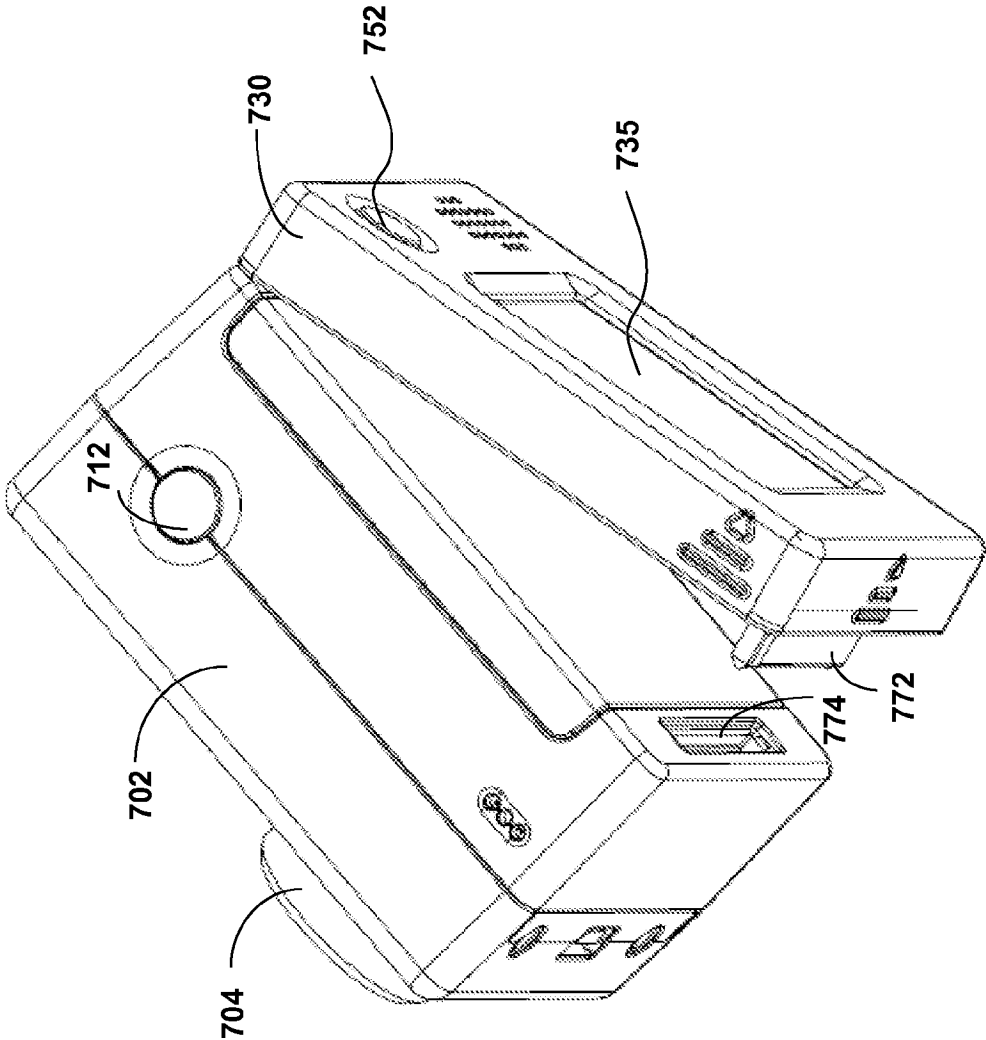


FIG. 8b

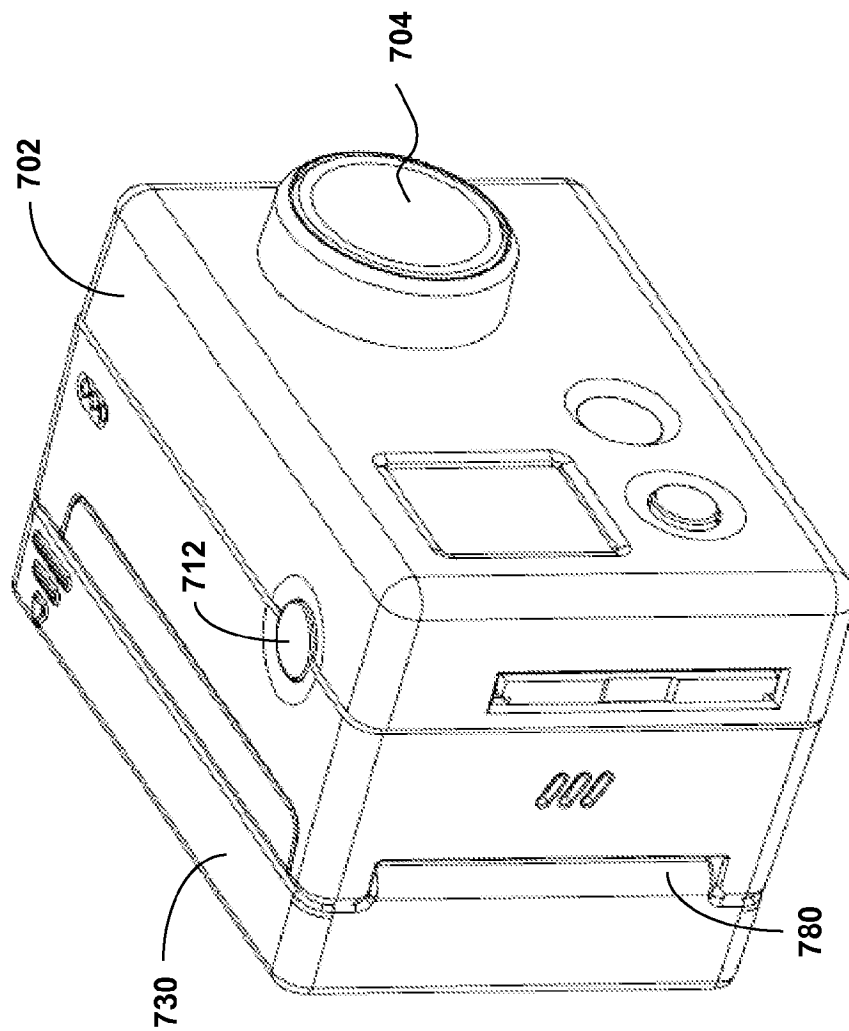


FIG. 9a

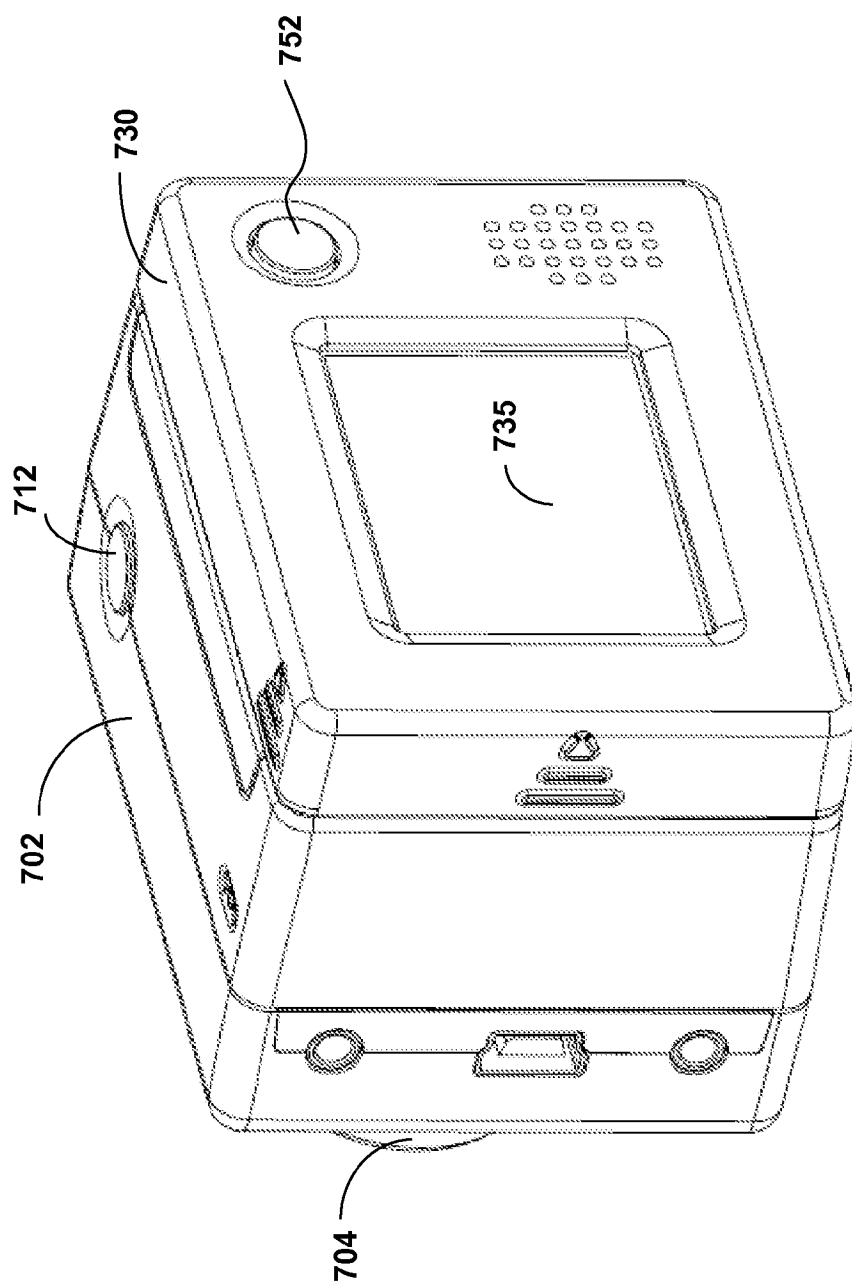


FIG. 9b

CAMERA HOUSING WITH INTEGRATED EXPANSION MODULE

RELATED APPLICATIONS

[0001] This application claims a benefit of, and priority to, U.S. Provisional Patent Application No. 61/078,756, entitled "Camera Housing with Integrated Expansion Module" filed on Jul. 7, 2008, the contents of which is hereby incorporated by reference.

BACKGROUND

[0002] 1. Technical Field

[0003] This disclosure relates to a camera housing, and more specifically, to a camera housing with an integrated expansion module for adding expanded features to an existing camera.

[0004] 2. Description of the Related Arts

[0005] The problem of conveniently carrying, accessing, and using a camera under various operating conditions has existed since the beginning of hand-held photography. It has become even more of a problem in recent years as a growing number of photographers attempt to take action photographs or videos while participating in fast-paced physical activities such as surfing, snorkeling, skiing, mountain biking, kayaking, rafting and so on.

[0006] In order to accommodate photography during such physical activities, camera manufacturers have produced cameras that are simple to operate, low cost, lightweight, and have compact form factors. These cameras can be secured using various mounts, harnesses, or straps to allow a user to keep one or more hands free for the physical activity. For example, camera wrist strap systems are available that provide a compact and lightweight camera together with a strap for securing the camera to a user's wrist. This configuration allows the user to easily access, operate, and then quickly secure the camera. Furthermore, the camera is small and light enough that it does not handicap the user while engaging in physical activity. Alternatively, helmet style camera systems allow a user to mount a compact and lightweight camera to a helmet. Other types of camera systems may include mounts for securing a camera to a bumper or windshield of a car to capture images or video while driving.

[0007] While such camera systems have become increasingly popular among photographers, these camera systems often lack features available in more traditional cameras. For example, wrist-mounted or helmet mounted camera systems often lack display screens in order to keep the camera systems small, lightweight, and low cost. While features such as a display screen may be desirable in some scenarios, it may not be useful in others scenarios. For example, a display screen would not be useful when the camera is mounted to a helmet, but may be useful when the camera is strapped to a wrist. Thus, a user may be reluctant to purchase a camera that includes the feature, particularly if the feature adds to the cost, physical size, and weight of the camera. Furthermore, as camera manufacturers produce cameras with new and/or improved features, users may become frustrated by the need to periodically purchase new cameras in order to have the new features available to them. There is lacking, inter alia, a camera system that provides expanded electronic functionality to an existing camera.

BRIEF DESCRIPTIONS OF THE DRAWINGS

[0008] The disclosed embodiments have other advantages and features which will be more readily apparent from the

following detailed description of the invention and the appended claims, when taken in conjunction with the accompanying drawings, in which:

[0009] FIG. (or "FIG.") 1a illustrates a first view of an embodiment of a camera housing with a door in an open position.

[0010] FIG. 1b illustrates a second view of an embodiment of a camera housing with a door in an open position.

[0011] FIG. 1c illustrates a third view of an embodiment of a camera housing with a door in an open position.

[0012] FIG. 2a illustrates a first view of an embodiment a camera housing with a door in an closed position.

[0013] FIG. 2b illustrates a second view of an embodiment a camera housing with a door in an closed position.

[0014] FIG. 3 illustrates a view of an embodiment a camera housing with a door detached from the housing.

[0015] FIG. 4 illustrates a various embodiment of expansion modules for use with the camera system.

[0016] FIG. 5a illustrates a first view of an embodiment a camera housing with an integrated display module.

[0017] FIG. 5b illustrates a second view of an embodiment a camera housing with an integrated display module.

[0018] FIG. 6 illustrates an embodiment of camera system with a shot positioning module communicatively coupled to a remote preview screen.

[0019] FIG. 7a illustrates a first view of an embodiment a camera with an expansion module detached from the camera body.

[0020] FIG. 7b illustrates a second view of an embodiment a camera with an expansion module detached from the camera body.

[0021] FIG. 8a illustrates a first view of an embodiment a camera with an expansion module attached to the camera body in an open position.

[0022] FIG. 8b illustrates a second view of an embodiment a camera with an expansion module attached to the camera body in an open position.

[0023] FIG. 9a illustrates a first view of an embodiment a camera with an expansion module attached to the camera body in an closed position.

[0024] FIG. 9b illustrates a first view of an embodiment a camera with an expansion module attached to the camera body in an closed position.

DETAILED DESCRIPTION

[0025] The Figures (FIGS.) and the following description relate to preferred embodiments by way of illustration only. It should be noted that from the following discussion, alternative embodiments of the structures and methods disclosed herein will be readily recognized as viable alternatives that may be employed without departing from the principles of what is claimed.

[0026] Reference will now be made in detail to several embodiments, examples of which are illustrated in the accompanying figures. It is noted that wherever practicable similar or like reference numbers may be used in the figures and may indicate similar or like functionality. The figures depict embodiments of the disclosed system (or method) for purposes of illustration only. One skilled in the art will readily recognize from the following description that alternative

embodiments of the structures and methods illustrated herein may be employed without departing from the principles described herein.

Configuration Overview

[0027] A camera system comprises a first portion of a camera housing structured to partially enclose a removable camera, and a second portion of a camera housing (i.e. a door) detachable from the first portion. The first portion of the camera housing includes a front face, a top face, a bottom face, a left side face, and a right side face. The door includes a back face structured to house an expansion module for interfacing with the camera to perform a camera function. An outer hinge structure located on a bottom edge of the door detachably couples to an inner hinge structure located on the bottom edge of the first portion of the housing. The outer and inner hinge structures form a hinge when coupled such that the door pivotally attaches to the first portion of the housing about the hinge. A first fastening structure is located on the top face of the first portion of the camera housing and detachably couples to a second fastening structure located on the top edge of the removable door such that the door is secured to the first portion of the camera housing in a closed position when the first fastening structure is coupled to the second fastening structure. An expansion interface cable communicatively couples to the expansion module for detachably coupling to a camera interface on the camera. The expansion interface cable facilitates communication of data between the expansion module and the camera when coupled to execute the camera function.

[0028] In a second aspect, an apparatus comprises a first housing portion having a front face with four sides structured to form a cavity to receive an electronic device, and a second housing portion detachably coupled with the first housing portion opposite the front face of the first housing portion. The first and second housing portion are collectively structured to enclose the electronic device within the cavity. The second housing portion further includes electronics including a communications interface. An interface cable has a first coupling interface for communicatively coupling the communication interface of the second housing portion and a second coupling interface for communicatively coupling the electronic device. The interface cable facilitates communication between the electronic device and the electronics within the second housing portion.

[0029] In a third aspect, a camera system comprises a camera body housing a camera. An expansion module detachably couples to the camera body for interfacing with the camera to perform a camera function. A first portion of a hinge structure positioned near an edge of the camera body detachably couples with a second portion of a hinge structure positioned near an edge of the expansion module. The first and second portions of the hinge structure form a hinge when coupled such that the expansion module is rotatable about the hinge. A first electrical connector positioned near an edge of the camera body opposite the first portion of the hinge structure detachably couples to a second reciprocal electrical connector positioned near an edge of the expansion module opposite the second portion of the hinge structure. The first and second electrical connector electrically couple the camera and the expansion module when coupled to facilitate data communication between the camera and the expansion module for executing the camera function.

Camera System Configuration

[0030] A camera system includes a camera housing with an embedded expansion module for providing one or more expanded features to an existing camera. It is noted that the camera can be configured as a still picture camera or a moving picture camera (e.g., video). *Figs. 1a-c* illustrate various views of the camera system in accordance with one embodiment. The camera system includes, among other components, a first housing portion **102** and a second housing portion **140** (i.e. door **140**), collectively referenced herein as housing **100**. In one embodiment, the first housing portion **102** includes a front face with four sides (i.e. a top side, bottom side, left side, and right side) structured to form a cavity that receives a camera **110** (e.g. a still camera or video camera). A second housing portion **140** (or door **140**) detachably couples with the first housing portion **102** opposite the front face of the first housing portion. The first housing portion **102** and second housing portion **140** are collectively structured to enclose the camera **110** within the cavity when the second housing portion **140** is secured to the first housing portion **102** in a closed position.

[0031] The camera housing **100** encloses and protects the camera **110**. The camera housing **100** is particularly advantageous when using the camera **110** during periods of physical activity when the camera **110** may be susceptible to damage. For example, without the housing **100**, the camera **110** may become scratched or otherwise damaged when used during physical activity. The camera **110** is removable from the housing **100** so that if the housing **100** becomes scratched or damaged, it can be easily replaced at a much lower cost than replacing the camera **110** itself.

[0032] In one embodiment, the camera **110** (and camera housing **100**) has a small form factor (e.g., a height of approximately 4 to 6 centimeters, a width of approximately 5 to 7 centimeters, and a depth of approximately 2 to 4 centimeters), and is lightweight (e.g., approximately 50 to 150 grams). The camera housing **100** can be rigid (or substantially rigid) (e.g., plastic, metal, fiberglass, etc.) or pliable (or substantially pliable) (e.g., leather, vinyl, neoprene, etc.). In one embodiment, the camera housing **100** may be appropriately configured for use in various elements. For example, the camera housing **100** may comprise a waterproof enclosure that protects the camera **110** from water when used, for example, while surfing or scuba diving.

[0033] Portions of the camera housing **100** may include exposed areas to allow a user to manipulate buttons on the camera **110** that are associated with the camera functionality. Alternatively, such areas may be covered with a pliable material to allow the user to manipulate the buttons through the camera housing **100**. For example, in one embodiment the top face of the camera housing **100** includes an outer shutter button **112** structured so that a shutter button of the camera **110** is substantially aligned with the outer shutter button when the camera **110** is secured within the camera housing **100**. The shutter button of the camera **110** is operationally coupled to the outer shutter button **112** so that pressing the outer shutter button **112** allows the user to operate the camera shutter button. In one embodiment, the front face of the camera housing **100** includes a lens window **104** structured so that a lens of the camera **110** is substantially aligned with the lens windows **104** when the camera **110** is secured within the camera housing **100**. The lens window **104** can be adapted for use with either conventional lens of the camera **110**, a wide angle lens, or any other specialized camera lens. In one

embodiment, the lens window **104** and/or lens of the camera **110** is removeably attachable to the first portion of the camera housing **102** and comprises a third portion of the housing **100**. In this embodiment, the lens window **104** comprises a waterproof seal so as to maintain the waterproof aspect of the housing **100**. Alternatively, the lens window **104** is permanently fixed to the housing portion **102**.

[0034] In one embodiment, the camera housing **100** includes one or more securing structures **120** for securing the camera housing **100** to one of a variety of mounting devices. For example, in one embodiment the camera housing **100** can be secured to a wrist strap that secures the camera to a user's wrist. An example of such a camera system is described in U.S. Pat. No. 6,955,484 entitled "Harness System for Attaching Camera to User" to Nicholas Woodman, the content of which is incorporated by reference herein in its entirety. In another embodiment, the housing **100** couples to a helmet mount via the securing structure **120** for mounting the camera to a helmet. In yet another embodiment, a car mount for mounting the camera to a car couples to the securing structure **120**. In yet other embodiments, other type of mount, strap, or securing devices known to those of ordinary skill in the art couple to the securing structure **120** for securing the camera to various other apparatuses or body parts.

[0035] In one embodiment, the second housing portion **140** comprises a door **140** (shown in the open position in FIGS. 1a-c) that allows the camera **110** to be removed from the housing **100**. The door **140** of the housing **100** pivots around a hinge **142** that allows the door **140** to be opened or shut. In one embodiment, a first fastening structure **144** located on the top face of the camera housing **100** detachably couples to a second fastening structure **146** on the door **140** of the housing **100**. The fastening structures **144**, **146** secure the door **140** to the first portion **102** of the camera housing **100** in a closed position when coupled. FIGS. 2a-b illustrate embodiments of the camera housing **100** with the door **140** secured in the shut position using the fastening structures **144**, **146**. For example, in one embodiment, the fastening structure **144** comprises a hook-shaped lateral bar and the fastening structure **146** comprises an L-shaped bar. The fastening structure **144** can pivot upwards to allow the door **140** to close and can then be pressed down around the fastening structure **146** to hold the door **140** in the closed position. In different embodiments, fastening structures for securing the door **140** can include, for example, a button assembly, a buckle assembly, a clip assembly, a hook and loop assembly, a magnet assembly, a ball and catch assembly, and an adhesive assembly, or any other type of securing mechanism.

[0036] In one embodiment, the housing **100** includes a watertight seal so that the housing **100** is waterproof when the door **140** is shut. For example, in one embodiment, the door **140** includes a sealing structure positioned on edges of the door **140**. The sealing structure provides a watertight seal between the first portion of the camera housing **102** and the door **140** when the first securing structure **144** on the top face of the camera housing **100** is coupled to the second securing structure **146** on the top edge of the door **140**.

[0037] In one embodiment, the door **140** detachably couples from the first housing portion **102** at the hinge **142**. FIG. 3 illustrates an example embodiment of the camera housing **100** with the door **140** uncoupled from the first housing portion **102**. In one embodiment, an outer hinge structure **152** on the bottom edge of the door **140** detachably couples to an inner hinge structure **154** on the bottom edge of the first

housing portion **102** to form the hinge **142**. For example, in one embodiment, the outer hinge structure **152** comprises one or more hook-shaped protrusions structured to securely fasten to a rod-shaped member of the inner hinge structure **154**. Other mechanisms for coupling the door **140** to the housing **100** may also be used in various alternative embodiments.

[0038] The door **140** of the camera housing **100** has an integrated expansion module **130** including a communications interface **132** for communicatively coupling to the camera **110**. The integrated expansion module **130** comprises electronics that add one or more functions to the camera **110**. The interface **132** facilitates data communication between the integrated expansion module **130** and a coupling interface **116** of the camera **110** in order to provide expanded functionality to the camera **110**.

[0039] In one embodiment, the interface **132** on the housing **100** communicatively couples to a camera interface **116** commonly available on existing camera **110**. For example, most digital cameras include an interface for transferring images and/or video captured by the camera to a PC or other storage device. Such an interface also often allows a user to supply firmware updates to the camera **110**. By applying appropriate firmware updates to the camera **110** and/or by receiving and manipulating image data retrieved from the camera **110**, the integrated expansion module **130** can provide the expanded features to the camera **110**. In addition, the interface can be used for various data transfers between the camera and the expansion module **130** to facilitate a variety of camera functions as will be described below. In one embodiment, the interfaces **132**, **116** comprises a Universal Serial Bus (USB) interface (e.g., USB A, USB B, mini USB (A or B) or micro USB (A, B or AB)). Alternatively, a different type of interface may be used such as, for example, a serial interface, a parallel interface, a FIREWIRE interface, an ETHERNET interface, and so on. In other embodiments, a wireless interface (e.g., BLUETOOTH) may be used.

[0040] In one embodiment, the integrated expansion module **130** is removable from the door **140** so that different expansion modules **130** providing different features to the camera can be swapped in and out. Alternatively, the entire door **140** is detachable from the first housing portion **102** (as illustrated in the embodiment of FIG. 3) and can be swapped with other doors **140** having different expansion modules **130** providing different features. Examples of different expansion modules for use with the camera system **100** are described in further detail below.

[0041] FIG. 4 illustrated a variety of different types of integrated expansion module **130** providing different functions to the camera **110** depending on the user's needs. According to various embodiments, the integrated expansion module **130** can comprise one or more of a display module **410**, a shot positioning module **420**, a wireless module **430**, a storage module **440**, an expansion power supply **450**, an audio capture module **460**, a data acquisition module **470**, an image processing module **480**, a night vision module **490**, and an expansion input/output (I/O) module **495**. An expansion module **130** may also comprise a module that includes a combination of functions (e.g., a storage module **440** and an audio capture module **460** enclosed within a single housing portion **140**). In a typical use, a user may have several different types of expansion modules **410-495** (collectively referred to as expansion module **130** for ease of discussion) available. The user can then swap in and out the different expansion modules **130** depending on the desired functions.

Embodiments of the camera system **100** using the different types of expansion modules **130** (e.g., **410-495**) are described in more detail below.

Camera Housing with Display Module

[0042] In one embodiment, the integrated expansion module **130** of the camera housing **100** comprises an integrated display module **410** to add display functions to a camera **110** that does not have a built in display. An example embodiment of a camera housing **100** with an integrated expansion module **130** having a display module **410** illustrated in FIGS. **5a-5b**. In this embodiment, the housing **100** includes a display screen **135** (e.g., a Liquid Crystal Display (LCD)) externally viewable from the back of the housing **100**. The display module **410** includes display control logic for adding display functions to the existing camera **110** without a built in display. For example, the display module **410** may digitally display the image currently in view of the camera lens on the display screen **135**. This provides the user with a preview image before taking a picture or while recording video and allows the user to operate the camera **110** without having to peer directly through a viewfinder. Additionally, the display module **410** may allow the user to view previously captured and stored images or video stored on the exterior display screen **135**.

Camera Housing with Shot Positioning System

[0043] In another embodiment, the integrated expansion module **130** of the camera housing **100** comprises a “shot” (e.g., photo or video shot) positioning module **420** configured to assist the user in aligning the camera when the viewfinder or external display is outside the user’s view (e.g., when the housing **100** is mounted to a helmet). One example embodiment of a system using the shot positioning module **420** is illustrated in FIG. **6**. In this embodiment, the shot positioning module **420** includes a communication interface that transmits image information from the camera **110** to a remote preview screen **604** that can be attached to a user’s arm or wrist. In one embodiment, the shot positioning module **420** includes a wireless interface (e.g., Bluetooth, Radio Frequency (RF), infrared (IR), 801.11 a/b/g/n or other wireless protocol) that communicates with the remote preview screen **504**.

[0044] The wireless interface transmits the image currently in view of the camera lens to the remote preview screen **604** for display. In one embodiment, the shot positioning module **420** communicates with the remote preview screen **604** via a two-way interface. In this embodiment, the remote preview screen **604** may have control buttons **606** that allow the user to control various camera operations from the remote preview screen **604**. Alternatively, the communication interface may be a one-way communication such that the remote preview screen **604** only receives and displays image information from the camera **110** but does not send any information or controls to the camera **110**. In this embodiment, the user still controls the camera **110** via the built-in camera buttons (e.g., the shutter button **114**).

Camera Housing with Wireless Module

[0045] In another embodiment, the integrated expansion module **130** comprises an integrated wireless module **430** that adds wireless connectivity to a camera **110** lacking wireless features. The wireless module **430** may include, for example a Bluetooth module, a Radio Frequency (RF) transceiver, an infrared (IR) transceiver, an 802.11 a/b/g/n transceiver, or any other wireless device. For example, the wireless module **430** could be used to allow the user to wirelessly download stored

images and/or video from the camera **110** to a personal computer (PC), e.g., a server computer, a desktop computer, a laptop, a netbook, or a smartphone. Alternatively, images and/or video can be captured and wirelessly downloaded in real-time from the camera **110**. The wireless module **430** may also allow a user to wirelessly control operation of the camera **110**. For example, if the camera **110** is mounted on a bumper of a car, the user could remotely control the camera **110** from inside the car via a remote control wirelessly coupled to the wireless module **430**.

Camera Housing with Storage Module

[0046] In another embodiment, the integrated expansion module **130** comprises an integrated storage module **440**. The storage module **440** provides additional storage space for storing captured images and/or movies. The storage module **440** may include any type of volatile or non-volatile memory including random access memories (RAMs), FLASH memory, magnetic or optical cards, or any type of media suitable for storing electronic data. Images or video captured by the camera **110** are transmitted to the integrated storage module **440** via the communication interface **132**.

Camera Housing with Expansion Power Supply

[0047] In another embodiment, the expansion module **130** comprises an expansion power supply **450** for providing power to the camera **110**. For example, the expansion power supply may include an expansion battery that supplements an internal battery of the camera **110** and provides additional battery life to the camera **110**. In another embodiment, the expansion power supply **450** can include a solar charger that captures solar energy to recharge a battery. The expansion power supply may also be configured so that rechargeable batteries providing power to the camera can be recharged through an expansion power supply **450** that comprises an inductive charging element or a capacitive charging element. In the case of inductive charging, the communication interface **132** may couple with an inductive coil plate that inductively couples with the inductive charger (which has its own coil). In the case of conductive charging, the communications interface **132** is configured to receive a discharge from a capacitive power source that is the expansion power supply **450**. Alternatively, the expansion power supply **450** couples directly to battery terminals of the camera **110** rather than coupling via the interface **132**.

Camera Housing with Audio Capture Module

[0048] In yet another embodiment, the integrated expansion module **130** can include an audio capture module **460** (e.g., a microphone or an interface for an external microphone) to capture and/or store audio data. In this embodiment, the audio capture module **460** captures audio concurrently with the camera **110** capturing video. Alternatively, the audio capture module **460** can capture audio alone without any corresponding video.

Camera Housing with Data Acquisition module

[0049] In yet another embodiment, the integrated expansion module **130** includes a data acquisition module **470** that acquires various data to store in association with images or video captured by the camera. For example, in one embodiment, the data acquisition module **130** capture Global Positioning System (GPS) data that provide positioning information. Such positioning information may be stored together with images and/or video so that the user can record where the images and/or video were taken. For example, in one embodiment, the GPS module automatically inserts a position stamp on a captured image or video indicating the location that the

image or video was captured. Similarly, the data acquisition module **470** can include, for example, an accelerometer, altimeter, clock, thermometer, humidity sensor, barometer, heart rate meter, light sensor, and so on. Any of the captured information can be stored with photographs or video or automatically inserted into the images or video to provide the user with information relating to the captured scene.

Camera Housing with Image Processing Module

[0050] In yet another embodiment, the integrated expansion module **130** includes an image processing module **480**. The image processing module **480** receives images and/or video from the camera and performs various image processing functions such as, for example, modifying brightness, contrast, saturation, hue, resolution, aspect ratio, and so on. In one particular embodiment, the image processing module converts images or videos captured in a 4:3 aspect ratio to a image or video 16:9 aspect ratio or vice versa. In one embodiment, the image processing module **480** includes a digital signal processor (DSP) chipset that is configured to “stretch” pixels gradually starting at a center of a captured image (stretch=0) working outward towards each edge and/or corner of the image (stretch=maximum_set). The number of directions for the stretch can be any integer. However, in one embodiment the number of directions of stretch are a factor of 2 for a 4 sided picture radiating in opposite directions from the center of an image. For example, the processing module **480** can stretch an image in 2 directions (any two opposite edges), 4 directions (each edge), 8 directions (each edge and each corner) and the like.

[0051] In an alternate embodiment, a wide angle lens couples with the camera **110** and captures images in 16:9 format and the image processing module **480** coverts it into a 4:3 format. In one embodiment the DSP is configured so that the captured 16:9 image is cropped into a 4:3 size. Alternately, the DSP is configured so that the pixels are “squeezed” with the maximum squeeze at the edges and corners (squeeze=maximum_set) and the minimum or no squeeze closer to the center of the image (squeeze=0).

Camera Housing with Night Vision Module

[0052] In yet another embodiment, the integrated expansion module **130** can include a night vision module **490** to add night vision capabilities to an existing camera **110**. The night vision module **490** may utilize any conventional night vision technology such as, for example, infrared night vision, thermal night vision, and so on. In one embodiment, the night vision module **490** operates with a specialized lens designed for night vision image and/or video capture.

Camera Housing with Expansion I/O Module

[0053] In yet another embodiment, the integrated expansion module **130** can include an expansion input/output (I/O) module **495** that allows other external devices to communicate with the camera **110** through a variety of possible interfaces. For example, the expansion I/O module **495** may adapt the standard communication interface of the camera **110** to be able to communicate with external devices via interfaces such as, for example, a USB interface, a serial interface, a parallel interface, a FIREWIRE interface, an ETHERNET interface, a wireless interface, and so on. The external device can then perform functions such as controlling operation of the camera **110**, or acquiring and/or processing data from the camera **110**.

ADDITIONAL EMBODIMENTS

[0054] In other additional embodiments, the door **140** of the camera housing **100** can have various shapes and sizes to

accommodate cameras **110** of different thicknesses and shapes. Thus, a user may have a set of removable doors **140** that can be swapped in and out depending on the size and shape of the camera **110** being used. In some embodiments, the camera **110** may also accommodate various expansion modules that attach directly to the body of the camera, an example of which is described below with reference to FIGS. **8a-b** and **9a-b**. Thus, various additional embodiments of the housing door **140** can also be sized and shaped to accommodate expandable cameras having expansion modules of different sizes and shapes. In one embodiment, a door **140** may have various cut-outs, vents, or other pass-throughs to provide improved cooling to the camera **110** and/or better audio capture if the camera **110** is equipped with a microphone. Thus, a user may swap between a vented camera door or a solid-bodied waterproof back door depending on the circumstances and the type of camera **110** being used.

[0055] The described housing **100** may also be adapted for a wider range of devices of varying shapes, sizes and dimensions besides cameras. For example, the housing **100** with expansion module **130** may be used to add expanded features to electronic devices such as cell phones, music players, PDAs, GPS units, or other portable electronic devices.

Expansion Module For Camera Body

[0056] In alternative embodiments, an expansion module **730** can couple directly to a camera body **702** as illustrated in FIGS. **7-9**. The expansion module **730** can be functionally similar to the expansion module **130** described above. Although the illustrations show an expansion module **730** with a built-in display, the embodiments are not limited to display modules. Rather, the expansion module **730** can be functionally similar to any of the various expansion modules described above (i.e. display module **410**, shot positioning module **420**, wireless module **430**, storage module **440**, expansion power supply **450**, microphone **460**, data acquisition module **470**, image processing module **480**, night vision module **490**, and expansion I/O module **495**). In one embodiment, a user may swap in and out various types of the expansion module **730** depending on the functionality the user wishes to add the camera.

[0057] FIGS. **7a-b** illustrate various views of an expansion module **730** detached from a camera body **702** according to this embodiment. The camera body **702** includes a shutter button **712**, a lens window **704**, a first portion of a hinge structure (e.g., hinge groove **764**) positioned near an edge of the camera body **702**, and a first portion of the an electrical connector (e.g., electrical groove **774**) positioned near an edge of the camera body **702** opposite the hinge structure **764**. In order to simplify the description, other conventional features of the camera body **702** are omitted from the FIGs. and the description that follows. The expansion module **730** includes a preview screen **735**, an expansion function button **752**, a second portion of a hinge structure (e.g., hinge connector **762**) positioned near an edge of the expansion module **730**, and a second portion of an electrical connector (e.g., electrical connector **772**) that is reciprocal to the first portion of the electrical connector **774** on the camera body **702**, and is positioned near an edge of the expansion module **730** opposite the hinge connector **762**.

[0058] FIGS. **8a-b** illustrate various views of the expansion module **730** partially coupled to the camera body **702** (i.e. in an open position). As illustrated, the hinge connector **762** of the expansion module **730** detachably couples to the hinge

groove 764 of the camera body 702 to form a hinge 780. Once in place, the expansion module 730 is rotatable about the hinge 780 formed by the hinge connector 762 and hinge groove 764. In one embodiment, the hinge connector 762 and hinge groove 764 snap together so as to form a secure coupling between the camera body 702 and expansion module 730. The electrical connector 772 is adapted to fit snugly into the electrical groove 774 on the camera body 702. When connected, the electrical connector 772 and electrical connection groove 774 serve to both secure the expansion module 730 to the camera body and provide an electrical connection between the expansion module 730 and the camera body 702.

[0059] FIGS. 9a-b illustrate various views of the expansion module 730 fully coupled to the camera body 702 (i.e. in a closed position). In this embodiment, the electrical connector 772 is securely connected to the electrical connection groove 774 to secure the expansion module 730 to the camera body 702 and to provide an electrical connection between the expansion module 730 and the camera body 702. The electrical connection allows for data flow between the camera body 702 and the expansion module 730 such as, for example, providing image data to the preview screen 735 of the expansion module 730. In various alternative embodiments, the electrical connection may provide for different types of data flow depending on the specific function of the expansion module 730.

[0060] It is note that some embodiments described herein have used the expression “coupled” and “connected” along with their derivatives. It should be understood that these terms are not intended as synonyms for each other. For example, some embodiments may be described using the term “connected” to indicate that two or more elements are in direct physical or electrical contact with each other. In another example, some embodiments may be described using the term “coupled” to indicate that two or more elements are in direct physical or electrical contact. The term “coupled,” however, may also mean that two or more elements are not in direct contact with each other, but yet still co-operate or interact with each other. The embodiments are not limited in this context.

[0061] Likewise, as used herein, the terms “comprises,” “comprising,” “includes,” “including,” “has,” “having” or any other variation thereof, are intended to cover a non-exclusive inclusion. For example, a process, method, article, or apparatus that comprises a list of elements is not necessarily limited to only those elements but may include other elements not expressly listed or inherent to such process, method, article, or apparatus. Further, unless expressly stated to the contrary, “or” refers to an inclusive or and not to an exclusive or. For example, a condition A or B is satisfied by any one of the following: A is true (or present) and B is false (or not present), A is false (or not present) and B is true (or present), and both A and B are true (or present).

[0062] In addition, use of the “a” or “an” are employed to describe elements and components of the embodiments herein. This is done merely for convenience and to give a general sense of the invention. This description should be read to include one or at least one and the singular also includes the plural unless it is obvious that it is meant otherwise.

[0063] Finally, as used herein any reference to “one embodiment” or “an embodiment” means that a particular element, feature, structure, or characteristic described in connection with the embodiment is included in at least one

embodiment. The appearances of the phrase “in one embodiment” in various places in the specification are not necessarily all referring to the same embodiment.

[0064] Upon reading this disclosure, those of skill in the art will appreciate still additional alternative structural and functional designs for a camera expansion module as disclosed from the principles herein. Thus, while particular embodiments and applications have been illustrated and described, it is to be understood that the disclosed embodiments are not limited to the precise construction and components disclosed herein. Various modifications, changes and variations, which will be apparent to those skilled in the art, may be made in the arrangement, operation and details of the method and apparatus disclosed herein without departing from the spirit and scope defined in the appended claims.

What is claimed is:

1. A camera system, comprising:

a first portion of a camera housing including a front face, a top face, a bottom face, a left side face, and a right side face, the faces structured to at least partially enclose a removable camera;

a second portion of a camera housing structured to enclose the camera within the camera housing, and structured to house an expansion module for interfacing with the camera to perform a camera function;

an inner hinge structure located on a bottom edge of the first portion of the housing;

an outer hinge structure located on a bottom edge of the second portion of the housing, the outer hinge structure for detachably coupling to the inner hinge structure of the first portion of the camera housing, wherein the outer hinge structure and the inner hinge structure form a hinge when coupled such that the second portion of the camera housing and the first portion of the camera housing are pivotally attached about the hinge;

a first fastening structure located on the top face of the first portion of the camera housing;

a second fastening structure located on a top edge of the second portion of the camera housing, the second fastening structure for detachably coupling to the first fastening structure such that the second portion of the camera housing is secured to the first portion of the camera housing in a closed position when the first fastening structure is coupled to the second fastening structure; and

an expansion interface cable communicatively coupled to the expansion module, the expansion interface cable for detachably coupling to a camera interface on the camera, the expansion interface cable facilitating communication of data between the expansion module and the camera to execute the camera function.

2. The camera system of claim 1, wherein the camera housing comprises a substantially rigid enclosure.

3. The camera system of claim 1, wherein the first fastening structure and the second fastening structure include one from a group consisting of a button assembly, a buckle assembly, a clip assembly, a hook and loop assembly, a hook and catch assembly, a magnet assembly, a ball and catch assembly, and an adhesive assembly.

4. The camera system of claim 1, wherein the front face of the camera housing includes a lens window structured so that a lens of the camera is substantially aligned with the lens windows when the camera is secured within the camera housing.

5. The camera system of claim 1, wherein the top face of the camera includes an outer shutter button structured so that a shutter button of the camera is substantially aligned with the outer shutter button when the camera is secured within the camera housing, wherein the shutter button of the camera is operationally coupled to the outer shutter button.

6. The camera system of claim 1, wherein the second portion of the camera housing includes a sealing structure positioned on edges of the second portion of the camera housing, the sealing structure providing a watertight seal between the first portion of the camera housing and the second portion of the camera housing when the first securing structure on the top face of the first portion of the camera housing is coupled to the second securing structure on the top edge of the second portion of the camera housing.

7. The system of claim 1, wherein the integrated expansion module comprises an integrated display module including: a display screen integrated with the second portion of the camera housing and externally viewable to a user; and display control logic communicatively coupled to the expansion interface cable and to the display screen, the display control logic for controlling the display screen to display at least one of an image or video received from the camera.

8. The system of claim 1, wherein the integrated expansion module comprises an integrated output preview system including:

a communication interface communicatively coupled to a remote preview screen, the communication interface outputting a display of an image or video received from the camera to the remote preview screen.

9. The system of claim 1, wherein the integrated expansion module comprises an image processing module for processing image or video data received by the camera to convert image data between a 4:3 aspect ratio and a 16:9 aspect ratio.

10. The system of claim 1, wherein the integrated expansion module comprises a wireless module to wirelessly communicate image information captured by the camera to a remote wireless receiver.

11. The system of claim 1, wherein the integrated expansion module comprises a storage module to store images or video captured by the camera.

12. The system of claim 1, wherein the integrated expansion module comprises a power expansion module to supply power to the camera.

13. The system of claim 1, wherein the integrated expansion module comprises a data acquisition module.

14. An apparatus, comprising:

a first housing portion comprising a front face with four sides structured to form a cavity, the cavity structured to receive an electronic device;

a second housing portion detachably coupled with the first housing portion opposite the front face of the first housing portion and structured to enclose the electronic device within the cavity, the second housing portion having electronics including a communications interface; and

an interface cable having a first coupling interface for communicatively coupling the communications interface of the second housing portion and a second coupling interface for communicatively coupling the electronic device, the interface cable facilitating communication between the electronic device and the electronics within the second housing portion.

15. The apparatus of claim 14, wherein the electronic device comprises a camera.

16. The apparatus of claim 14, wherein the camera comprises a video camera.

17. The apparatus of claim 14, wherein the first housing portion includes a first portion of a coupling mechanism.

18. The apparatus of claim 17, wherein the second housing portion includes a second portion of a coupling mechanism, the first portion and the second portion of the coupling mechanism structure to detachably couple.

19. A camera system comprising:

a camera body housing a camera;

an expansion module detachably coupled to the camera body for interfacing with the camera to perform a camera function;

a first portion of a hinge structure positioned near an edge of the camera body;

a second portion of a hinge structure positioned near an edge of the expansion module, wherein the first portion of the hinge structure is detachably coupled to the second portion of the hinge structure and wherein the first portion and second portion of the hinge structure form a hinge when coupled such that the expansion module is rotatable about the hinge;

a first electrical connector positioned near an edge of the camera body opposite the first portion of the hinge structure;

a second electrical connector reciprocal to the first electrical connector positioned near an edge of the expansion module opposite the second portion of the hinge structure, wherein the first electrical connector detachably couples to the second electrical connector and wherein the first and second electrical connector electrically couple the camera and the expansion module when coupled to facilitate data communication between the camera and expansion module for executing the camera function.

20. The system of claim 19, wherein the expansion module comprises a display module including:

a display screen integrated with the expansion module and externally viewable to a user; and

display control logic communicatively coupled to the expansion interface cable and to the display screen, the display control logic for controlling the display screen to display at least one of an image or video received from the camera.

* * * * *