



COMMERCIAL FIXTURES

BREVITY® Urinal



PAMLICO SHROUD™



RELIABLE, HIGH-PERFORMANCE
VITREOUS CHINA FIXTURES FOR
ANY COMMERCIAL APPLICATION



TABLE OF CONTENTS

Flushometer Toilets.....	1-3
Urinals	4-5
Lavatories	6-8
Pressure Assist Toilets	9-13



Dedicated to the spirit of the American worker, Mansfield features a wide range of quality products proudly Made in the USA. Just look for this symbol.

SINGLE SOURCE. SINGLE SPECIFICATION. SINGLE RESPONSIBILITY.

Specifying vitreous china fixtures for any commercial application can be a daunting task. Performance, reliability, accessibility, styling, water conservation and other considerations are all critical to a commercial installation. When you choose Mansfield,[®] you get products and service backed by over 80 years of commercial fixture experience and innovation.

The core of Mansfield's strength has always been our engineering and manufacturing. A leader in technology, we were first with our Quantum[®] pressure-assist toilets.

At Mansfield, we work hard to maintain our reputation for excellence and to offer an extensive commercial product line designed to accommodate today's demanding applications. We also offer the best protection in the china industry—the Mansfield Limited Lifetime Warranty.

All it takes is one call. Simple and concise. One call to source, specify, and service.



MORE RESOURCES *for Engineers and Architects!*

Looking to learn more about Mansfield? Check us out online at **mansfieldplumbing.com**; the tools you need are there. Download catalogs, review specifications, compare models and more.

Plus, when you choose Mansfield, you can download high quality CAD drawings, BIM objects, Revit files and related documents for your next project by visiting mansfieldplumbing.com or caddetails.com and using keyword Mansfield.

FLUSHOMETER TOILETS

Mansfield® flushometer toilets deliver enhanced durability, premium performance and ADA installation options. These fixtures provide long-term dependability for many specialty applications including bariatric and healthcare settings.



Flushometer, toilet seat and supply not included.

ADRIATIC™ Model 1319		SPECIFICATIONS*
	<p>Features:</p> <ul style="list-style-type: none"> • Floor-mount flushometer toilet • Specifically designed for industrial, commercial and clinical applications • Siphon-jet flushing action for exceptional performance • 1.28** or 1.6 Gpf low water consumption • SmartHeight™ chair height bowl for maximum comfort • 2-1/8" glazed trapway reduces clogging • 1-1/2" top spud • 10" rough-in • Available in White • MaP: 1,000 grams <p><i>**when using the proper 1.28 flushometer</i></p>	

ADRIATIC™ Model 1319RS		SPECIFICATIONS*
	<p>Features:</p> <ul style="list-style-type: none"> • Floor-mount, rear spud flushometer toilet • Specifically designed for industrial, commercial and clinical applications • Siphon-jet flushing action for exceptional performance • 1.28** or 1.6 Gpf low water consumption • SmartHeight™ chair height bowl for maximum comfort • 2" glazed trapway reduces clogging • 1-1/2" rear spud • 10" rough-in • Available in White • MaP: 1,000 grams <p><i>**when using the proper 1.28 flushometer</i></p>	

ADRIATIC™ Model 1319BPL		SPECIFICATIONS*
	<p>Features:</p> <ul style="list-style-type: none"> • Floor-mount flushometer toilet • Built-in bedpan lugs so bedpans stay secure • Specifically designed for clinical applications • Siphon-jet flushing action for exceptional performance • 1.28** or 1.6 Gpf low water consumption • SmartHeight™ chair height bowl for maximum comfort • 2-1/8" glazed trapway reduces clogging • 1-1/2" top spud • 10" rough-in • Available in White • MaP: 1,000 grams <p><i>**when using the proper 1.28 flushometer</i></p>	

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.

BALTIC™

Model 1311NS


SPECIFICATIONS*



Features:

- Floor-mount flushometer toilet
- Specifically designed for industrial and commercial applications
- Siphon-jet flushing action for exceptional performance
- 1.28** or 1.6 Gpf low water consumption
- 2" glazed trapway reduces clogging
- 1-1/2" top spud
- 10" rough-in
- Available in White, Biscuit and Bone
- MaP: 1,000 grams

**when using the proper 1.28 flushometer

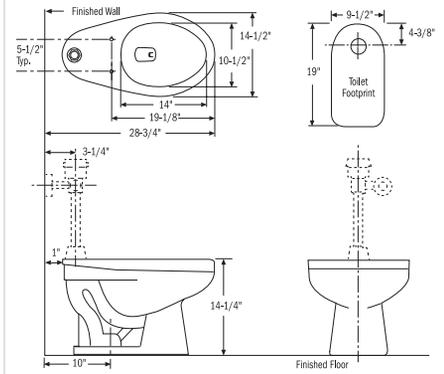

BALTIC™

Model 1311RS


SPECIFICATIONS*



Features:

- Floor-mount, rear spud flushometer toilet
- Specifically designed for industrial and commercial applications
- Siphon-jet flushing action for exceptional flushing performance
- 1.28** or 1.6 Gpf low water consumption
- 2" glazed trapway reduces clogging
- 1-1/2" rear spud
- 10" rough-in
- Available in White
- MaP: 1,000 grams

**when using the proper 1.28 flushometer

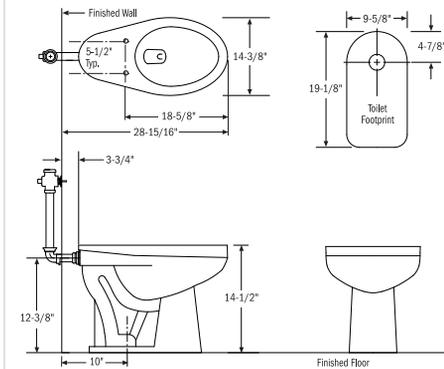

ERIE™

Model 1301


SPECIFICATIONS*



Features:

- Wall-mount, rear outlet flushometer toilet
- Specifically designed for industrial, commercial and clinical applications
- 1.28** or 1.6 Gpf low water consumption
- Siphon-jet flushing action for exceptional flushing performance
- 1-7/8" glazed trapway reduces clogging
- 1-1/2" top spud
- Available in White
- MaP: 1,000 grams

**when using the proper 1.28 flushometer

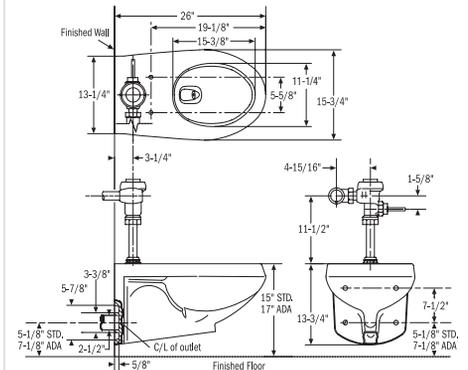

ERIE™

Model 1301BPL


SPECIFICATIONS*





Features:

- Wall-mount, rear outlet flushometer toilet
- Specifically designed for clinical applications
- 1.28** or 1.6 Gpf low water consumption
- Built-in bedpan lugs so bedpans stay secure
- Siphon-jet flushing action for exceptional flushing performance
- 1-7/8" glazed trapway reduces clogging
- 1-1/2" top spud
- Available in White
- MaP: 1,000 grams


**when using the proper 1.28 flushometer

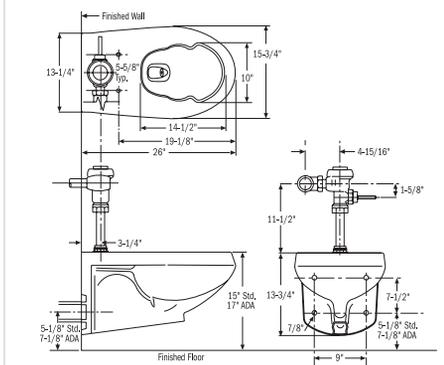

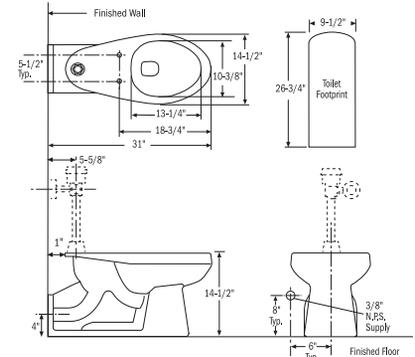 <p>ELONGATED FRONT</p> <p>MADE IN THE USA</p> <p>HET</p>	<p>1312 Model 1312</p> <p>Specifications:</p> <ul style="list-style-type: none"> • Floor mount, rear outlet flushometer toilet • Specifically designed for industrial and commercial applications • 1.28** or 1.6 Gpf low water consumption • Siphon-jet flushing action for exceptional flushing performance • 1-3/4" glazed trapway • Available in White • MaP: 1,000 grams <p>**when using the proper 1.28 flushometer</p>	<p>SPECIFICATIONS*</p> 
--	--	---

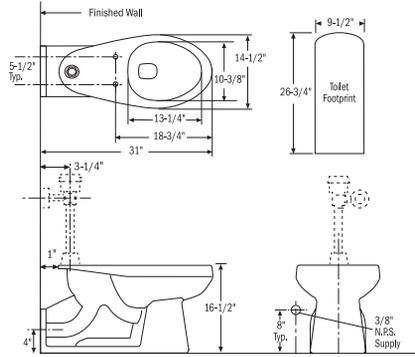 <p>ELONGATED FRONT</p> <p>MADE IN THE USA</p> <p>HET</p> <p>ADA</p> <p>SmartHeight™</p>	<p>1313 ADA Model 1313</p> <p>Specifications:</p> <ul style="list-style-type: none"> • Floor mount, rear outlet flushometer toilet • Specifically designed for industrial and commercial applications • 1.28** or 1.6 Gpf low water consumption • Siphon-jet flushing action for exceptional flushing performance • 1-7/8" glazed trapway • Available in White • MaP: 800 grams <p>**when using the proper 1.28 flushometer</p>	<p>SPECIFICATIONS*</p> 
--	--	--

ELEMENTARY TOILET

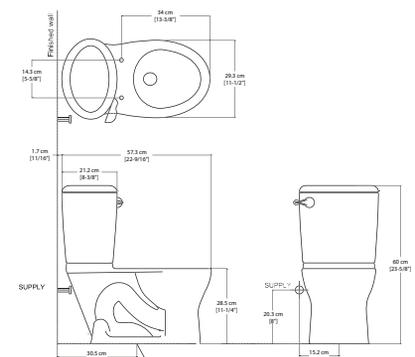 <p>ROUND FRONT</p> <p>HET</p> <p>Top view, Includes cover lock</p>	<p>ELEMENTARY Model 5326-4320</p> <p>Specifications:</p> <ul style="list-style-type: none"> • Juvenile toilet (11-1/4" high bowl) • Includes a SmartClose toilet seat • Includes cover lock • 1.28 gpf / 4.86 lpf low water consumption • Round front bowl • High efficiency toilet • 2" flapper flush valve • Pilot operated anti-siphon fill valve • 12" rough-in • Chrome-plated trip lever • Available in White 	<p>SPECIFICATIONS*</p> 
--	--	---

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.

URINALS

Mansfield® urinals deliver performance and dependability in a variety of handsome styles and performance options. High-efficiency water-conserving urinals as well as ADA compliant models help meet the requirements of today's commercial applications.



Flushometer and supply not included.






ADAM™ Model 401HE

Specifications*

- Wall mount wash down (0.5 Gpf/1.9 Lpf) urinal
- Easy to clean
- Fitted with 3/4" top spud and 1-1/2" outlet spud
- Mounting bracket and bolts included
- Available in White, Biscuit and Bone

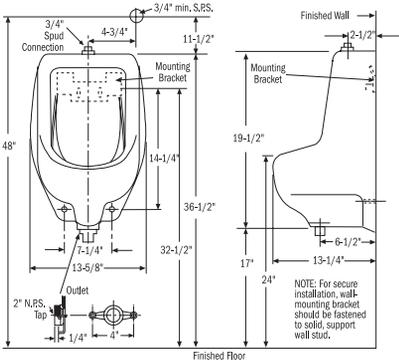

NOTE: For secure installation, wall-mounting bracket should be fastened to solid, support wall stud.








CASCADE™ Model 410HE

Specifications*

- High efficiency (0.5 Gpf), half-stall, wall-mount, washdown urinal with extended sides
- Integral trap
- Easy to clean
- Includes 3/4" top spud, 2" outlet spud and gaskets, two concealed hangers and bolts
- Available in White

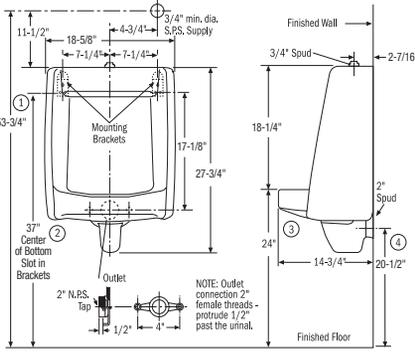

NOTE: Outlet connection 2" female threads - protrude 1/2" past the urinal.

ADA Installation	
1	44"
2	28-7/8"
3	14-1/4"
4	10-3/4"







CASCADE™ Model 410HE-RS

Specifications*

- High efficiency (0.5 Gpf), half-stall, wall-mount, washdown urinal with extended sides
- Integral trap
- Rear spud
- Easy to clean
- Includes 3/4" rear spud, 2" outlet spud and gaskets, two concealed hangers and bolts
- Available in White

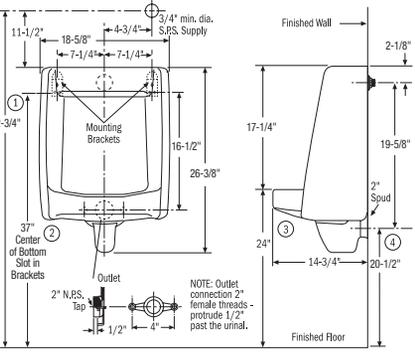

NOTE: Outlet connection 2" female threads - protrude 1/2" past the urinal.

ADA Installation	
1	44"
2	28-7/8"
3	14-1/4"
4	10-3/4"



SUBURBAN™ Model 475HE

SPECIFICATIONS*




Features:

- Siphon-jet, wall-mount (0.5 Gpf/1.9 Lpf) urinal
- Integral trap
- Easy to clean
- Includes 3/4" top spud, 2" IPS outlet connector and gaskets, concealed mounting bracket and bolts
- Available in White

ADA Installation

1	41-1/8"
2	26-3/8"
3	17"
4	10-1/2"

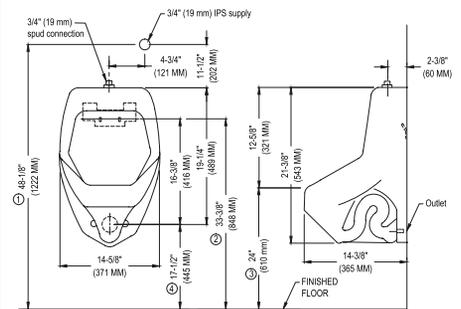


BREVITY® Model 422

SPECIFICATIONS*



Features:

- High efficiency 1-pint (.125 Gpf/.5 Lpf) urinal
- Wall mount, wash-out flush action
- 3/4" top spud
- Modern look with clean lines
- Includes flushing rim, integral strainer, two concealed hangers and bolts
- Available in White

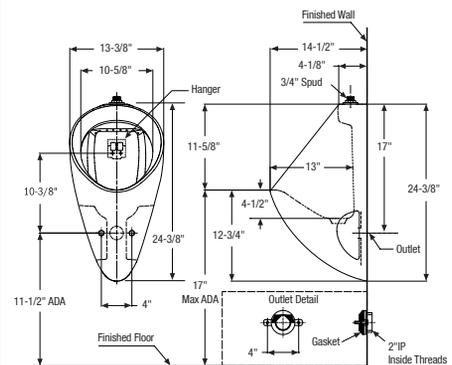


BREVITY® Model 422RS

SPECIFICATIONS*



Features:

- High efficiency 1-pint (.125 Gpf/.5 Lpf) urinal
- Wall mount, wash-out flush action
- 3/4" rear spud
- Modern look with clean lines
- Includes flushing rim, integral strainer, two concealed hangers and bolts
- Available in White

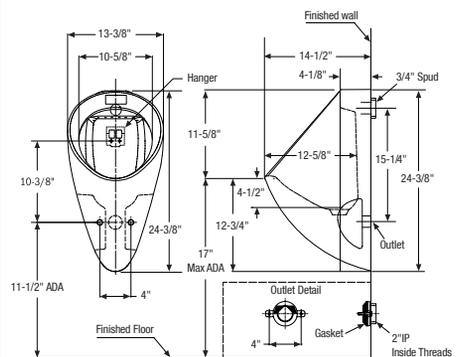

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.

LAVATORIES

Mansfield® offers lavatories to accommodate virtually any commercial application. Whatever your need, you'll find a stylish and durable, vitreous china Mansfield® lavatory for the job.



Faucet not included.

GRAND ISLE™ Model 2018HBNS		SPECIFICATIONS*
<p>MADE IN THE USA</p> <p>ADA**</p>	<p>Features:</p> <ul style="list-style-type: none"> • 22" x 18-1/8" wall-mount lavatory • Full 4" high backsplash • Drilled for concealed arm carrier • Concealed front overflow • Includes hanger • Available in single hole, 4" and 8" faucet centers • Available in White, Biscuit and Bone* <p><i>*Biscuit and Bone only available in 8" faucet center</i></p> <p>Also available:</p> <p>Model 2018HBNS-LO less overflow 4" and 8" faucet centers</p>	

WILLOW RUN™ Model 1917C		SPECIFICATIONS*
<p>MADE IN THE USA</p>	<p>Features:</p> <ul style="list-style-type: none"> • 19-1/2" x 16-3/4" wall-mount lavatory • 13-1/2" x 10" basin • Wide back ledge with twin side soap recesses • Concealed front overflow • Includes hanger • Available in 4" faucet center • Available in White, Biscuit, and Bone <p>Also available:</p> <p>Model 1917C-LO less overflow 4" faucet center only</p>	

SPRUCE COVE™ Model 1613NS		SPECIFICATIONS*
<p>MADE IN THE USA</p>	<p>Features:</p> <ul style="list-style-type: none"> • 16-1/8" x 13-1/4" wall-mount compact lavatory • 13-1/4" x 8" basin • Wide back ledge • Concealed front overflow • Includes hanger • Available in 4" faucet center • Available in White 	


WALNUT KNOLL™ Model 2008

SPECIFICATIONS*



Features:

- 21" x 18-3/4" wall-mount lavatory with ledge
- Wide back ledge with 16" x 10-3/4" basin
- Drilled for concealed arm carrier
- Concealed front overflow
- Includes hanger
- Available in 4" faucet center
- Available in White

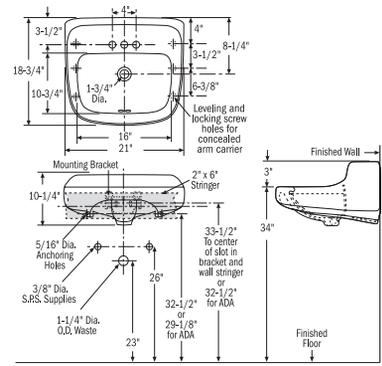

PAMLICO SHROUD™ Model 2040 (2038/2039)

SPECIFICATIONS*




Features:

- 21-1/4" x 22" wall-mount lavatory with optional shroud pedestal
- Perfect for commercial and institutional applications
- Clean lines for easy cleaning
- Available in single hole, 4" and 8" faucet centers
- Available in White

Also available:

Model 2038-LO less overflow
4" and 8" faucet centers

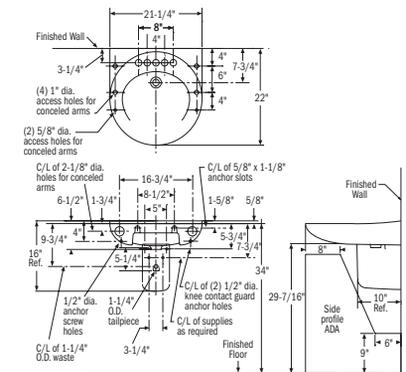

MAUMELLE™ Model 2028

SPECIFICATIONS*




Features:

- 21-1/4" x 22" semi-recessed lavatory
- Perfect for residential and hospitality applications
- Clean lines for easy cleaning
- Concealed front overflow
- Available in single hole, 4" and 8" faucet centers
- Available in White

Also available:

Model 2028-LO less overflow
4" faucet center only

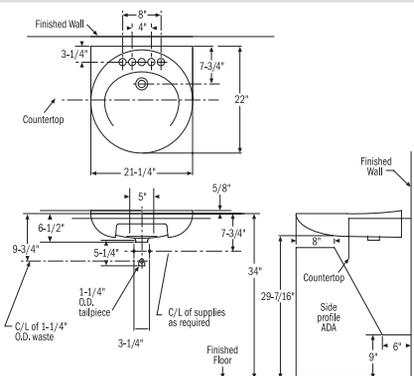


CAPE CHARLES™ Model 2018C

SPECIFICATIONS*



Features:

- 21" x 18-1/4" wall-mount lavatory with ledge
- 17" x 12-5/8" basin
- Drilled for concealed arm carrier
- Concealed front overflow
- Includes hanger
- Available in 8" faucet center
- Available in White

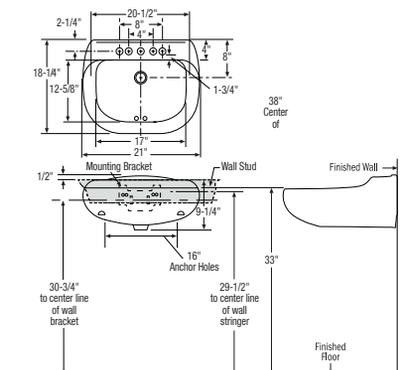

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.
**Must be mounted with the rim or counter surface no higher than 34" above the finished floor and provide a clearance of at least 29" above the finished floor to the bottom of the apron to comply with ADA requirements.

WHEELCHAIR™ Model 315

SPECIFICATIONS*




Features:

- 20" x 27" wall-mount lavatory
- 13-1/4" x 12-3/4" basin
- Drilled for concealed arm carrier
- Concealed front overflow
- Concave front for wheelchair accessibility
- Available in 4" and 8" faucet centers
- Available in White

Also available:

Model 315-LO less overflow

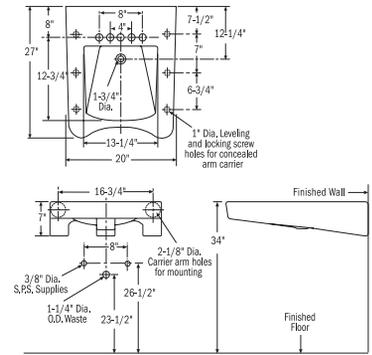


PETITE MAPLE™

Model 216NS

• 17-1/8" x 14-1/4"
undercounter lavatory

SPECIFICATIONS*

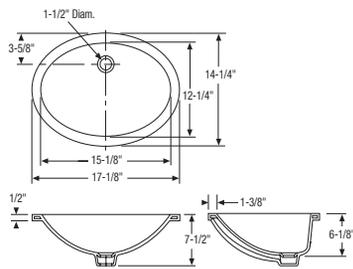


MAPLE™

Model 217

• 19-3/4" x 16"
undercounter lavatory

SPECIFICATIONS*

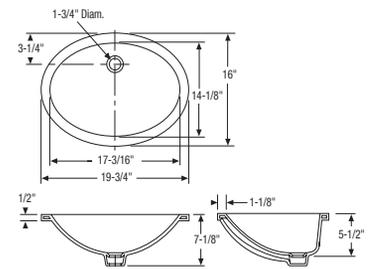


PETITE COVINGTON™

Model 218NS

• 21-3/8" x 13-1/2"
undercounter lavatory

SPECIFICATIONS*

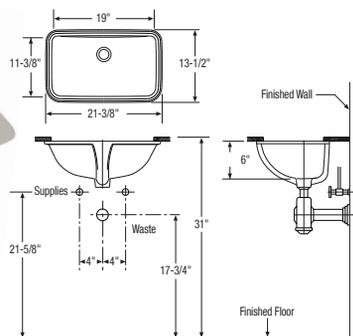


BRENTWOOD®

Model 234

• 20-5/16" x 14-3/16"
undercounter lavatory

SPECIFICATIONS*

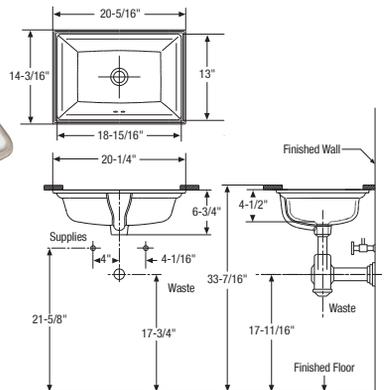

PRESSURE-ASSIST TOILETS

Quantum® pressure-assist toilets use up to 40% less water and all offer outstanding “one flush” performance. Whether you choose the ultra-efficient 1.0 Gpf QuantumOne™, the Quantum® 1.28, or the 1.6 Gpf Quantum®, you’ll be assured of superior performance over conventional gravity flush toilets.

Pressure-Assist Flushing Performance & Conservation

The power to conserve water yet perform to the demands of commercial applications — these are the high standards achieved by the Mansfield® Pressure-Assist Flushing System.

The flushing power delivered by all Quantum® model toilets easily exceeds all ANSI/ASME toilet tests including the 60’ drainline carry.

For water conservation AND commercial-grade reliability, put the power of the Mansfield® Pressure-Assist Flushing System to work for you.

Pressure-Assist Flushing Performance

All Mansfield®
Quantum® Models



60 feet (18 meters)

Average Consumption:

Quantum® – 1.6 Gpf / 6.0 Lpf, Quantum® 1.28 – 1.28 Gpf/4.86 Lpf, QuantumOne™ – 1.1 Gpf / 4.0 Lpf

Gravity Flush*

Average Consumption
1.6 Gpf / 6.0 Lpf

49 feet (14.9 meters)

* Test report ASME A112.19.2-2003



Toilet seat and supply not included.

QUANTUMONE™ Model 144-153

REAR OUTLET*




Features:

- Elongated front, rear outlet, wall mount (1.0 Gpf/3.8 Lpf)
- High performance pressure-assist flushing system
- 2” glazed trapway
- Available in White
- MaP: 800 grams

Also available:

- Model 144-153RH with right hand trip lever
- Model 144-154 with push button actuator

***153 tank Made in the USA, with PuraClean™ glaze**

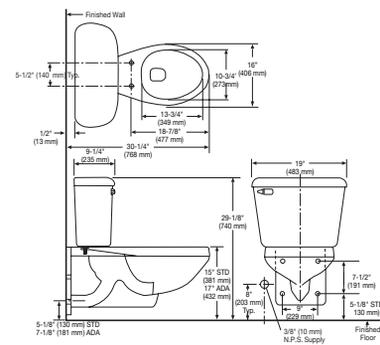

QUANTUMONE™ Model 146-153

12" ROUGH-IN*




Features:

- Round front (1.0 Gpf/3.8 Lpf)
- Powerful pressure-assist flushing
- Outstanding “one flush” performance
- Saves 40% more water than conventional flush toilets
- 2-1/8” glazed trapway
- 12” rough-in
- Available in White, Biscuit and Bone
- MaP: 1,000 grams

Also available:

- Model 146-153RH with right hand trip lever
- Model 146-154 with push button actuator

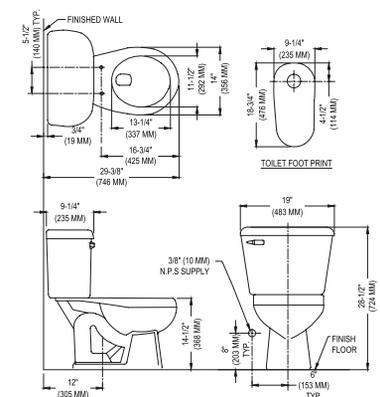

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.

QUANTUMONE™ Model 147-153

12" ROUGH-IN*




Features:

- Elongated front (1.0 Gpf/3.8 Lpf)
- Powerful pressure-assist flushing
- Outstanding "one flush" performance
- Saves 40% more water than conventional flush toilets
- 2-1/8" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone
- MaP: 1,000 grams

Also available:

- Model 147-153RH with right hand trip lever
- Model 147-154 with push button actuator

*153 tank Made in the USA, with PuraClean™ glaze

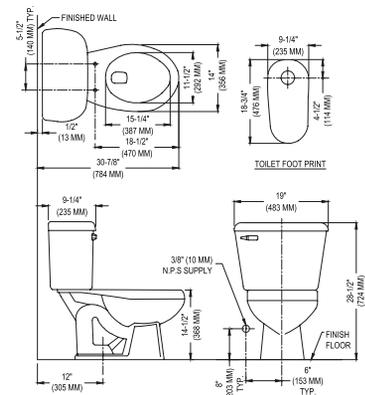

QUANTUMONE™ Model 148-153

12" ROUGH-IN*




Features:

- Elongated front, SmartHeight™ (1.0 Gpf/3.8 Lpf)
- Powerful pressure-assist flushing
- Outstanding "one flush" performance
- Saves 40% more water than conventional flush toilets
- 2-1/8" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone
- MaP: 1,000 grams

Also available:

- Model 148-153RH with right hand trip lever
- Model 148-154 with push button actuator

*153 tank Made in the USA, with PuraClean™ glaze

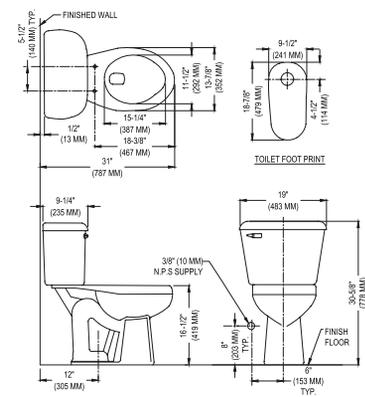

QUANTUMONE™ Model 149-153

REAR OUTLET




Features:

- Elongated front, rear outlet, floor mount (1.0 Gpf/3.8 Lpf)
- Powerful pressure-assist flushing
- Outstanding "one flush" performance
- Saves 40% more water than conventional flush toilets
- 1-7/8" glazed trapway
- Available in White, Biscuit and Bone
- MaP: 1,000 grams

Also available:

- Model 149-153RH with right hand trip lever
- Model 149-154 with push button actuator

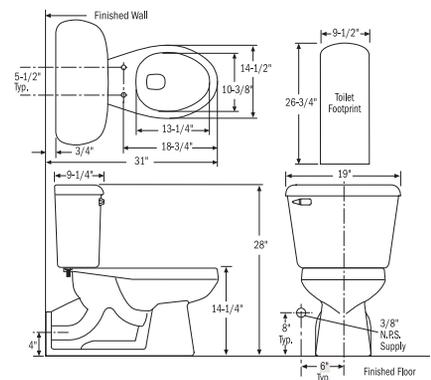

QUANTUMONE™ Model 151-153

REAR OUTLET




Features:

- Elongated front, rear outlet, floor mount (1.0 Gpf/3.8 Lpf)
- Powerful pressure-assist flushing
- Outstanding "one flush" performance
- Saves 40% more water than conventional flush toilets
- 1-7/8" glazed trapway
- Available in White, Biscuit and Bone
- MaP: 600 grams

Also available:

- Model 151-153RH with right hand trip lever
- Model 151-154 with push button actuator

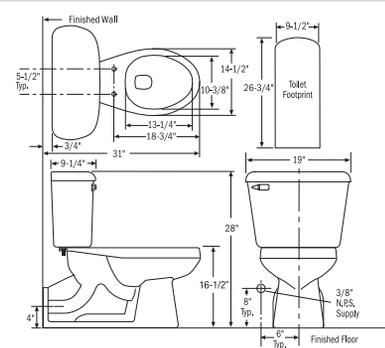

QUANTUM® 1.28 Model 144-155

REAR OUTLET*




Features:

- Elongated front, rear outlet, wall mount (1.28 Gpf/4.86 Lpf)
- High performance pressure-assist flushing system
- 2" glazed trapway
- Available in White

Also available:

Model 144-155RH with right hand trip lever

***123 tank Made in the USA, with PuraClean™ glaze**

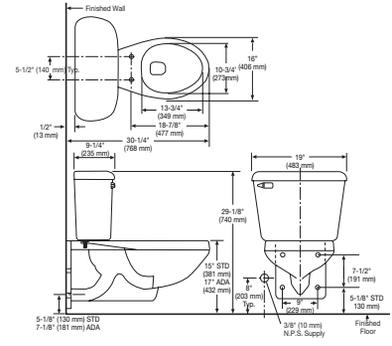

QUANTUM® 1.28 Model 146-155

12" ROUGH-IN*




Features:

- Round front (1.28 Gpf/4.86 Lpf)
- High performance pressure-assist flushing system
- 2" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone

Also available:

Model 146-155RH with right hand trip lever



QUANTUM® 1.28 Model 147-155

12" ROUGH-IN*




Features:

- Elongated front (1.28 Gpf/4.86 Lpf)
- High performance pressure-assist flushing system
- 2" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone

Also available:

Model 147-155RH with right hand trip lever

***155 tank Made in the USA, with PuraClean™ glaze**

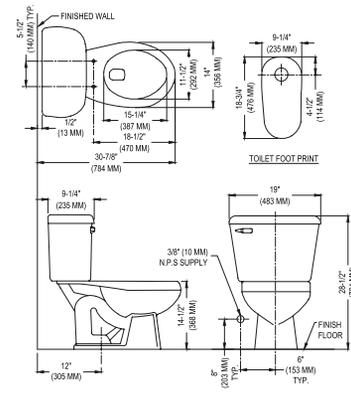

QUANTUM® 1.28 Model 148-155

12" ROUGH-IN*




Features:

- Elongated front, SmartHeight™ (1.28 Gpf/4.86 Lpf)
- High performance pressure-assist flushing system
- 2" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone

Also available:

Model 148-155RH with right hand trip lever

***155 tank Made in the USA, with PuraClean™ glaze**

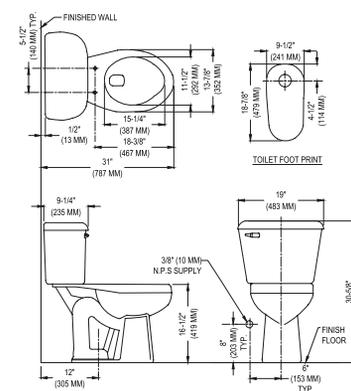

*NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2-2008/CSA B45.1-08.

QUANTUM® 1.28 Model 149-155

REAR OUTLET




Features:

- Elongated front, rear outlet, floor mount (1.28 Gpf/4.86 Lpf)
- High performance pressure-assist flushing system
- 2" glazed trapway
- Available in White, Biscuit and Bone

Also available:

Model 149-155RH with right hand trip lever

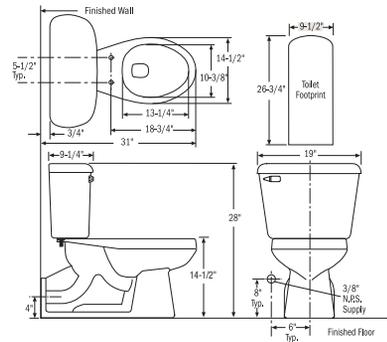

QUANTUM® 1.28 Model 151-155

REAR OUTLET




Features:

- Elongated front, rear outlet, floor mount (1.28 Gpf/4.86 Lpf)
- High performance pressure-assist flushing system
- 1-7/8" glazed trapway
- Available in White, Biscuit and Bone

Also available:

Model 151-155RH with right hand trip lever

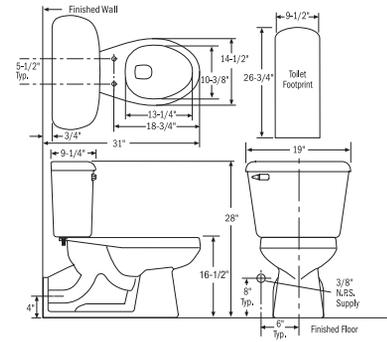

QUANTUM® Model 144-123

REAR OUTLET*



Features:


- Elongated front, rear outlet, wall mount (1.6 Gpf/6.0 Lpf)
- High performance pressure-assist flushing system
- 2" glazed trapway
- Available in White
- MaP: 1,000 grams

Also available:

Model 144-123RH with right hand trip lever

Model 144-122 with push button actuator

***123 tank Made in the USA, with PuraClean™ glaze**

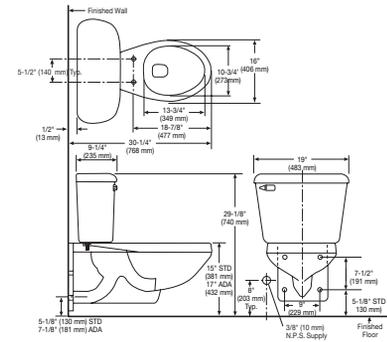

QUANTUM® Model 146-123

12" ROUGH-IN*




Features:

- Round front (1.6 Gpf/6.0 Lpf)
- High performance pressure-assist flushing system
- 2-1/8" glazed trapway
- 12" rough-in
- Available in White, Biscuit and Bone
- MaP: 800 grams

Also available:

Model 146-123RH with right hand trip lever

Model 146-122 with push button actuator

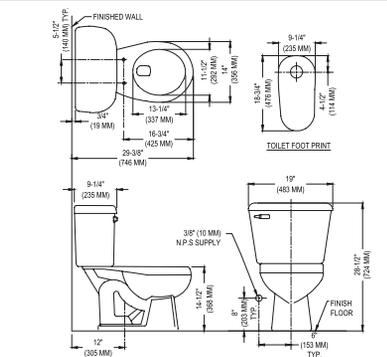

		MANSFIELD		Gerber	American Standard	Kohler	Zurn	
		Model #	Description	Model #	Model #	Model #	Model #	
TOILET COMBINATIONS	QUANTUM® – Pressure Assist 1.6 gpf							
	146-123	1.6 gpf / 6.0 lpf, Round		21-302	2366.100.020	-	-	
	147-10-123	1.6 gpf / 6.0 lpf, Elongated, 10" Rough-in		21-311	-	-	-	
	147-123	1.6 gpf / 6.0 lpf, Elongated		21-312	2462.016.020	K-3505	Z5770	
	148-10-123	1.6 gpf / 6.0 lpf, Elongated, ADA10" Rough-in		21-317	-	-	-	
	148-123	1.6 gpf / 6.0 lpf, Elongated, ADA		21-318	2467.016.020	K-3493	Z5560	
	149-123	1.6 gpf / 6.0 lpf, Elongated, Rear Outlet		21-310	2878.016.020	K-3554	-	
	151-123	1.6 gpf / 6.0 lpf, Elongated, ADA Rear Outlet		21-325	2878.016.020	-	-	
	QUANTUM®1.28 – Pressure Assist 1.28 gpf							
	146-155	1.28 gpf / 4.86 lpf, Round		HE-21-302	-	-	-	
	147-155	1.28 gpf / 4.86 lpf, Elongated		HE-21-312	-	-	-	
	148-155	1.28 gpf / 4.86 lpf, Elongated, ADA		HE-21-318	-	K-3609	-	
	149-155	1.28 gpf / 4.86 lpf, Elongated, Rear Outlet		HE-21-310	-	-	-	
	151-155	1.28 gpf / 4.86 lpf, Elongated, ADA Rear Outlet		HE-21-325	-	-	-	
	QUANTUMONE™ – Pressure Assist 1.0 gpf							
	146-153	1.0 gpf / 3.8 lpf, Round		EF-21-302	2467.100	-	-	
	147-153	1.0 gpf / 3.8 lpf, Elongated		EF-21-312	2462.100.020	K-3531-0	Z5661	
	148-153	1.0 gpf / 3.8 lpf, Elongated, ADA		EF-21-318	2467.100.020	K-3519-0	Z5570	
149-153	1.0 gpf / 3.8 lpf, Elongated, Rear Outlet		EF-21-310	2876.100.020	K-3652	Z5586		
151-153	1.0 gpf / 3.8 lpf, Elongated, ADA Rear Outlet		EF-21-325	2878.100.020	K-3578	-		
URINALS	401HE	Adam™ Wall Mount, Wash-Down		27-740	6581.015.020	K-5024-T-0	Z5720	
	410HE	Cascade™ Half-Stall, Wash-Down		HE27-730	6596.001	-	Z5755	
	422	Brevity ADA		-	-	-	-	
	422RS	Brevity ADA Rear Spud		-	6042.001EC	-	-	
	475HE	Suburban™ Integral Trap, Siphon Jet	Top Spud	27-750	6550.001	K-5016-ET-0	Z5730	
			Rear Spud	27-755	-	K-5016-ER-0	Z5740	
LAVATORIES	216	Petite Maple Under Counter		12-770	0495.221.020	K-2209-0	-	
	217	Maple Under Counter		12-780	0496.221.020	K-2210-0	Z5220	
	218	Petite Covington Under Counter		12-760	0618.000.020	K-2339-0	-	
	234	Brentwood Under Counter		12-765	0614.000.020	-	-	
	315-4	Wheelchair Wall Mount		12-464	9141.011.020	K-12636-0	-	
				12-468	-	-	Z5320	
	1613NS	Spruce Cove Wall Mount		12-354	-	-	-	
	1917C	Willow Run Wall Mount		12-314	321.026	K-1728-0	Z5314	
	2008-4	Walnut Knoll Wall Mount		12-384	124.024	K-1729-0	Z5314	
				-	-	-	Z5318	
	2018HBNS-1 2018HBNS-4 2018HBNS-8	Grande Isle Wall Mount		-	0356.421	-	-	
				12-654	0355.012	K-2005-0	Z5360	
				12-658	0356.015.020	K-2006-0	-	
	2028-1			-	-	-	-	
	2028-4			-	403.004	-	-	
	2028-4LO	Maumelle		-	403.008	-	-	
2028-8			-	403.008	-	-		
2038-1			-	955.001	K-1999-N4	Z5341-PED		
2038-4	Pamlico Wall Mount (2040 with optional shroud)		12-474	954.004	-	Z5344-PED		
2038-8			12-478	958.008	-	Z5348		
2038-LO			-	-	-	-		
2039	Shroud		29-832	59.020	-	-		
SPUD BOWLS	1301 & 1301BPL	Erie Flush Valve Toilet with or without Bedpan Lugs		25-033	2257.001	K-4325	Z5615	
	1311NS	Baltic Flush Valve Toilet		25-833	3043.001	K-4406	Z5650	
	1312	Floor Mount Back Outlet		25-874	3697.001	K-4396	Z5655	
	1313	Floor Mount Back Outlet ADA		25-878	2529.116	K-4352	Z5640	
	1319 & 1319RS	Adriatic Flush Valve Toilet with Top or Rear Spud		25-733	3461.001	K-4368-0	Z5665	



Mansfield Plumbing Products, LLC

Phone: 1-877-3060

Fax: 419-938-6234

custsrvs@mansfieldplumbing.com