


SUBMITTAL DATA SHEET

No-Lead Low Pressure Valves No-Kink Hose Bibb - 72006S

SWT x G.H.T. - 1/2" SWT or 3/4" Coupling x G.H.T.



A.Y. McDonald Mfg. Co. Low Pressure Valves are constructed from heavy duty no-lead brass and are recommended for residential and commercial applications and provide positive shut-off with various inlet configurations.

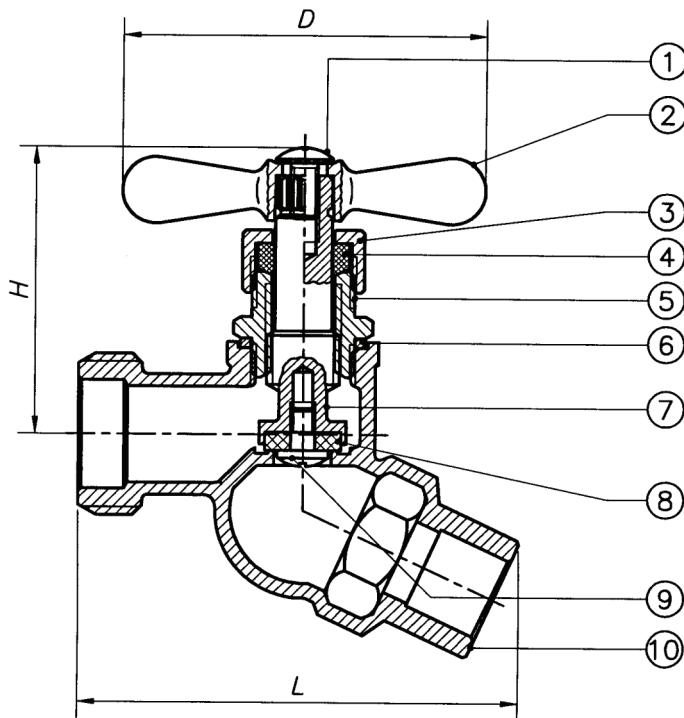

Dimensions

Size	D	H	L
3/4" & 1/2" x 3/4"	2.36	1.97	2.87

Materials

No.	Part	Material
1	Handle Bolt	Steel
2	T-Handle	Zinc
3	Packing Nut	No-Lead Brass
4	Gland Packing	Graphite
5	Bonnet	No-Lead Brass
6	Packing	Formocon
7	Stem	No-Lead Brass
8	Seat Packing	Rubber
9	Seat Screw	No-Lead Brass
10	Body	No-Lead Brass

SUBMITTAL INFORMATION

- 125 WOG
- Complies with NSF / ANSI 372-2010

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
P.O. Box 508
Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737
Fax: 1-800-832-9296
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by:

10-13