



OLYMPIA FAUCETS, INC.

Interchange City Distribution Center #20
1277 Heil Quaker Boulevard
La Vergne, TN 37086
(888) 772-7701
www.olympiafaucets.com

Model Number: P-2300B, P-2400B, P-2301B, P-2302B, P-2303B, P-2304B, P-2305B

Warnings and Notes:

Check with local plumbing code requirements before installation.
This product should be installed by a local listed plumber.
Do not use plumbers putty on threads.

Tools:



Adjustable Wrench



Plumbers Putty



Sealant Tape




Rags




Installation Steps:


Single Handle Tub and Shower Pressure Balance Valve




(1) For CXC installation :- Remove all the parts before soldering.




(2) Refer to installation drawing for dimension. Install inlets and outlets connection to the valve. Avoid cross flow connections. Do not install shut off valve to any of the outlets. Cap the tub port or shower port for shower only or tub only installations. For threaded connections do not overtighten.



(3) Important: Do not use PEX or CPVC between the valve and Tub Spout.




(4) For CXC installation:- Once the inlets and outlets are installed. Carefully install all the parts.




(5) For back to back installation rotate the cartridge 180 degree. Ensure B to B 'UP' marking on cartridge is on top position. Check for any leaks before finishing wall.

Installation Drawing P-2300B

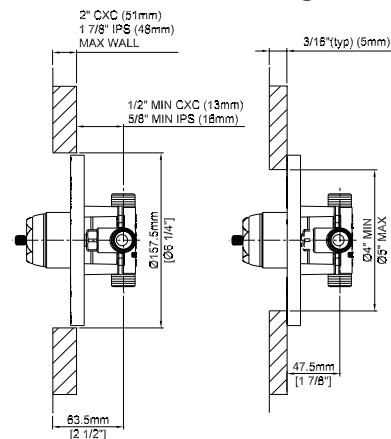


Installation Drawing P-2400B

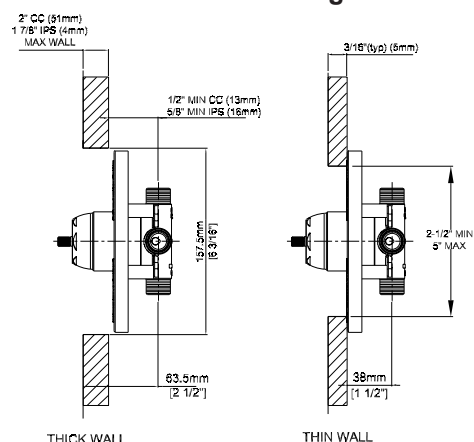

Exploded Drawing:

* Note: Please specify finish/color when ordering.

	ITEM #	DESCRIPTION
A	OP-440021	Mud Guard
B	OP-440022*	Sleeve Nut
C	OP-340008	Ceramic Cartridge & Spool
D	OP-440007	Inlet Supply Stop
E	OP-440023	Protective Cap
1	OP-440024	Valve Mud Guard Screw

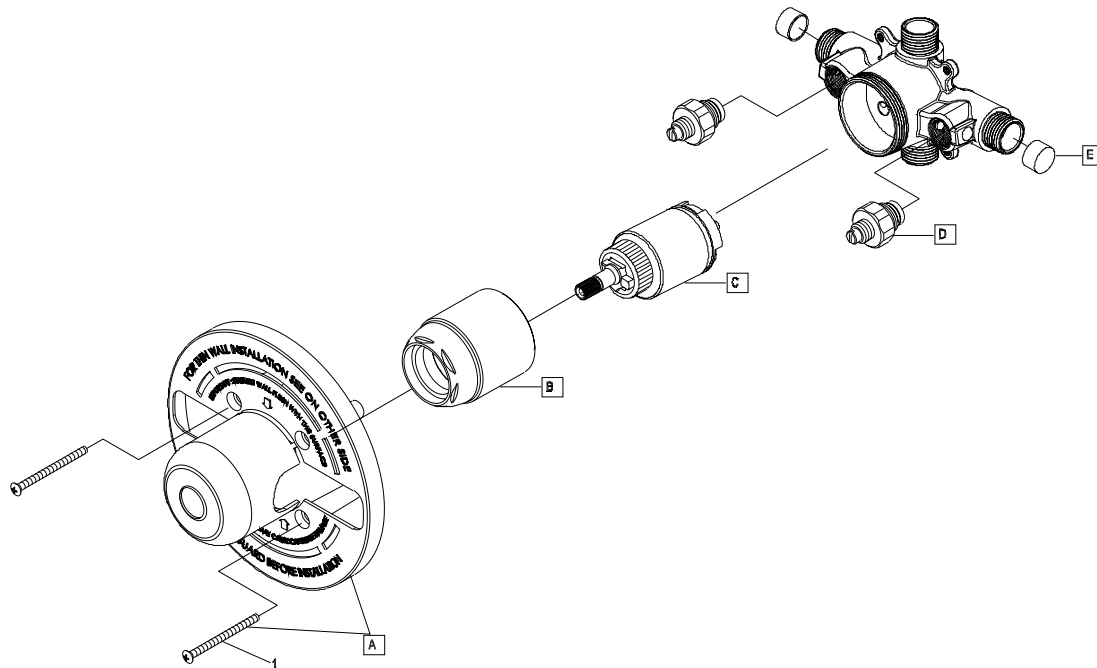

For more care information or trouble shooting
inquiries about your Olympia product, Please call:

OLYMPIA FAUCETS, INC. (888) 772-7701

7AM - 8PM EST (4AM to 5PM PST)

www.olympiafaucets.com