


# SUBMITTAL DATA SHEET

## No-Lead Low Pressure Valves No-Kink Hose Bibb – 72006

FNPT X G.H.T.



A.Y. McDonald Mfg. Co. No-Lead Low Pressure Valves are constructed from heavy duty no-lead brass and are recommended for residential and commercial applications and positive shut-off with various inlet configurations.

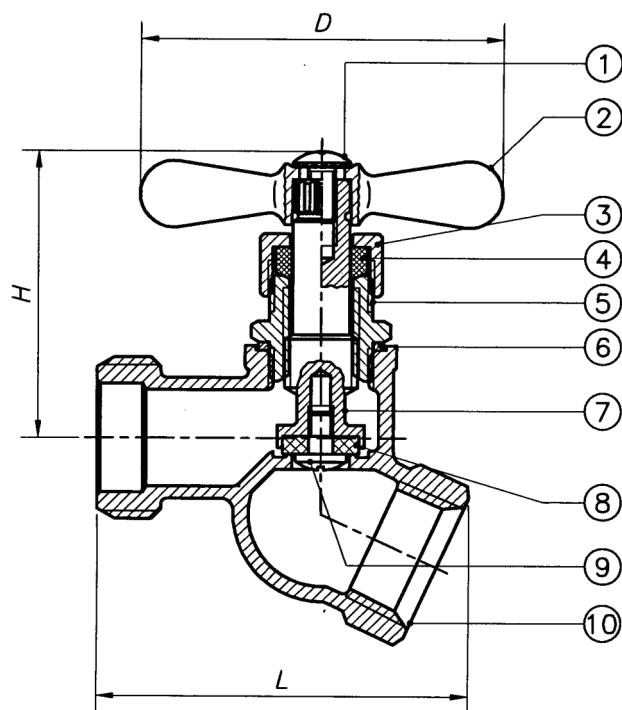

### Dimensions

Size	D	H	L
1/2" FNPT x 3/4" MHT	2.36	1.97	2.44
3/4" FNPT x 3/4" MHT	2.36	1.97	2.50

### Materials

No.	Part	Material
1	Handle Bolt	Steel
2	T-Handle	Zinc
3	Packing Nut	No-Lead Brass
4	Gland Packing	Graphite
5	Bonnet	No-Lead Brass
6	Packing	Formocon
7	Stem	No-Lead Brass
8	Seat Packing	Rubber
9	Seat Screw	No-Lead Brass
10	Body	No-Lead Brass

### SUBMITTAL INFORMATION

- 125 WOG
- Sizes: 1/2", 3/4"
- Complies with NSF/ANSI 372-2010

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



**A.Y. McDonald Mfg. Co.**  
P.O. Box 508  
Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737  
Fax: 1-800-832-9296  
Hours: 7:00 a.m. - 5:00 p.m., CST

[sales@aymcdonald.com](mailto:sales@aymcdonald.com)  
[www.aymcdonald.com](http://www.aymcdonald.com)

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**

06-13