


# SUBMITTAL DATA SHEET

## No-Lead Loose Key No-Kink Hose Bibbs 72006LK, 72007LK, 72006K


FNPT & MNPT inlets x G.H.T.




A.Y. McDonald Mfg. Co. No-Lead Loose Key No-Kink Hose Bibbs are fully certified to all applicable standards. The loose key design allows for ease of operation and positive shut-off and is ideal for residential and commercial applications. Each hose bibb is constructed of heavy duty no-lead brass. These are available in both FNPT & MNPT inlets x G.H.T.

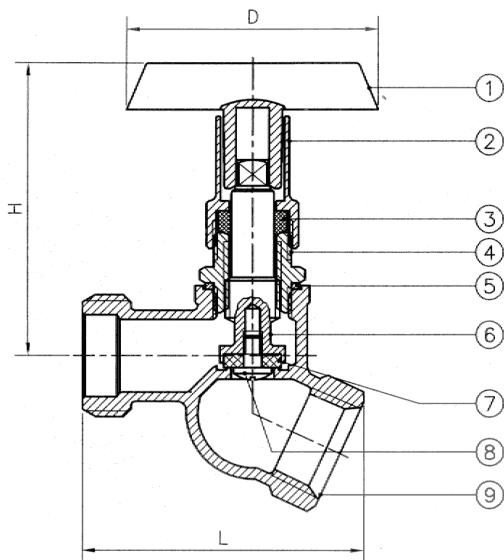

72006LK

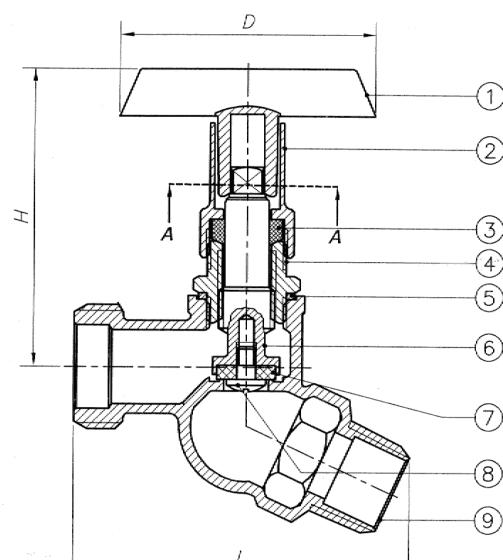

72007LK

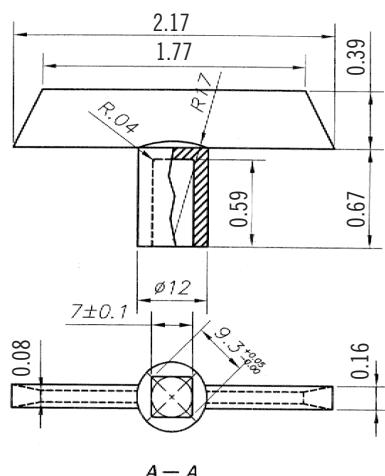

72006K

### Dimensions

Model	Size	D	H	L
72006LK	1/2 MNPT x 3/4" MHT"	2.17"	2.52"	2.44"
	3/4 MNPT x 3/4" MHT"	2.17"	2.52"	2.50"
72007LK	1/2 MNPT x 3/4" MHT"	2.17"	2.52"	2.87"
	3/4 MNPT x 3/4" MHT"	2.17"	2.52"	2.97"

### Materials

No.	Part	Material
1	T-Handle	Zinc
2	Packing Nut	No-Lead Brass
3	Gland Packing	PTFE
4	Bonnet	No-Lead Brass
5	Packing	Nylon
6	Stem	No-Lead Brass
7	Seat packing	Rubber (NBR)
8	Seat Screw	Forged Brass
9	Body	Cast Brass

### SUBMITTAL INFORMATION

- 125 WOG
- Complies with NSF / ANSI 372 & NSF / ANSI 61
- Temperature rating - 180°F



A.Y. McDonald Mfg. Co.  
P.O. Box 508  
Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737  
Fax: 1-800-832-9296  
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com  
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: