

25" top-/undermount single-bowl kitchen sink

K-3894-4

Features

- 27" (686 mm) minimum base cabinet width
- Single bowl
- 6" (152 mm) depth
- Rear drain placement increases cabinet storage space underneath sink
- Includes installation hardware
- Three faucet holes and one accessory hole to the right

Material

Premium 18-gauge stainless steel

Installation

- For undermount installation, countertop thickness cannot be greater than 1" (25 mm) for ADA compliance
- Top-mount or undermount

Recommended Products/Accessories

K-8801 Sink drain and strainer with tailpiece K-8799 Sink drain and strainer basket K-23726 Drain treatment K-23729 Stainless steel cleaner

Optional Products/Accessories

1177161 Installation Clip Kit K-11352 Disposal Flange with Stopper

Included Components

1130570 Hardware Kit, Self-Rimming



ADA

Codes/Standards ASME A112.19.3/CSA B45.4 ADA

ICC/ANSI A117.1

KOHLER® One-Year Limited Warranty


See website for detailed warranty information.










25" top-/undermount single-bowl kitchen sink **K-3894-4**

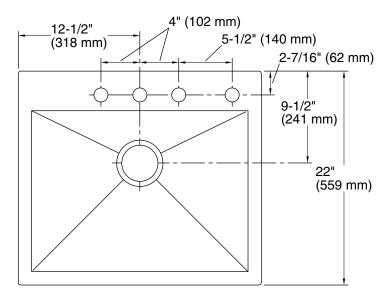



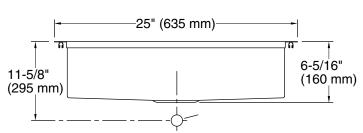



Technical Information

All product dimensions are nominal.

Basin configuration: Single Bowl
Center(s): 8" (203 mm)
Min. base cabinet 27" (686 mm)

width:

Bowl area (Only): Length: 22-1/4" (565 mm)

Width: 16-9/16" (420 mm) Bowl depth: 6" (152 mm) Water depth: 6" (152 mm)

Number of deck

holes:

Faucet hole(s): 1-7/16" (37 mm)
Soap/Lotion hole: 1-7/16" (37 mm)
Drain hole: 3-3/4" (94 mm)

Template: 1130822-7, required, included

Notes

Install this product according to the installation instructions.

Hardward Kit 1177161 needed for countertops with a 2-1/2" (64 mm) thickness or less.

ADA compliant when installed to the specific requirements of these regulations.

