

Downspout Nozzles and Covers

Fig. # 1770, 1771 and 1775

The Downspout Nozzle is used as a parapet overflow or at the base of a wall where a concealed leader discharges rainwater to the ground. The nozzle design diverts water away from the building, eliminating wall stains. The wall flange covers the rough opening.



Figure # 1770



Fig. # 1770T



Fig. # 1770Y



Fig. # 1775



Fig. # 1771

Product Features

- Nozzle design diverts water away from building, eliminating wall stains.
- Blends aesthetically with the outside of the building
- No sharp edges like other materials
- Nozzles are considered ornamental
- Wall flange covers rough opening
- Slides over or threads onto PVC and cast iron pipe
- Figure # 1770 - Available in threaded and no-hub
- Figure # 1771 - Set-screw version
- Figure # 1775 - Used as a downspout cover to conceal overflow leader

Downspout nozzles and covers by Jay R. Smith Mfg. Co. are a part of our Contractor Friendly Products. These products are designed with the installer in mind. They are designed to save time, require less manpower, and make the contractor's job easier.



JAY R. SMITH MFG. CO.
Member of Acorn's Family of Companies

**Contractor Friendly Products
by Jay R. Smith Mfg. Co.**

Figure Number 1770

FUNCTION: Used as a parapet overflow or at the base of a wall where a concealed leader discharges rainwater to ground. Nozzle design diverts water away from building, eliminating wall stains. Wall flange covers rough opening and serves as anchor.

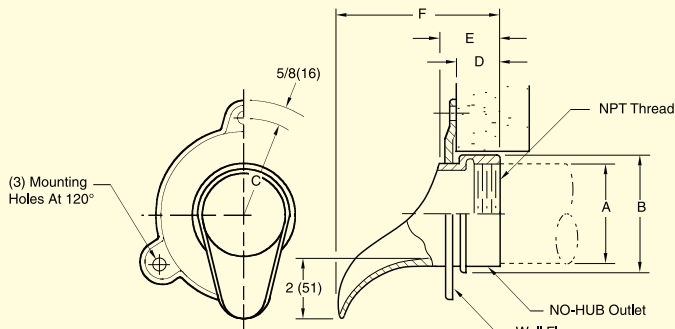


Fig. 1770T.....Threaded Outlet
Fig. 1770Y.....NO-HUB Outlet (02(50), 03(75), 04(100) and 06(150))

NOTE: Dimensions shown in parentheses are in millimeters.

A=PIPE	02(50)	03(75)	04(100)	05(125)	06T(150)	06Y(150)	08(200)	10(255)	12(305)
B=DIA	2 3/4 (70)	4 (100)	5 (125)	6 (150)	7 1/4 (185)	7 1/4 (185)	9 1/4 (235)	11 1/8 (283)	13 1/4 (335)
C=RAD	2 3/4 (70)	3 1/2 (89)	3 7/8 (98)	4 3/8 (111)	5 (125)	5 (125)	5 7/8 (149)	7 1/4 (185)	8 (205)
D	1 3/8 (35)	1 3/8 (35)	1 3/8 (35)	1 3/8 (35)	1 3/8 (35)	1 13/16 (46)	1 5/8 (41)	1 3/4 (44)	2 (51)
E	2 1/16 (52)	2 1/16 (52)	2 1/16 (52)	2 1/16 (52)	2 1/16 (52)	2 1/2 (64)	2 3/8 (60)	2 3/4 (70)	2 15/16 (75)
F	5 5/8 (143)	5 5/8 (143)	5 5/8 (143)	5 5/8 (143)	5 5/8 (143)	6 1/4 (160)	5 15/16 (149)	5 3/8 (138)	7 9/16 (192)

REGULARLY FURNISHED:
Cast Bronze Nozzle and Flange.

VARIATIONS:
☐ Bird Screen -BS
☒ NO-HUB Adaptor (specify Fig. 2646Y)
(5"(125), 8"(200), 10"(255) and 12"(305) only)

OPTIONAL MATERIALS:
☐ Nickel Bronze -NB
☐ Polished Bronze -PB

Figure Number 1771

FUNCTION: Used as a parapet overflow or at the base of a wall where a concealed leader discharges rainwater to ground. Nozzle design diverts water away from building, eliminating wall stains. Wall flange covers rough opening.

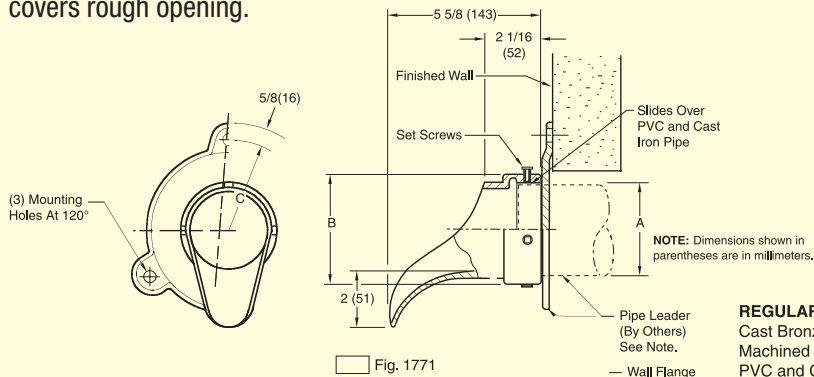


Fig. 1771

A = Pipe Size	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)	08 (200)	10 (250)	12 (305)
B = DIA	2 3/4 (70)	4 (100)	5 (125)	6 (150)	7 1/4 (185)	9 1/4 (235)	11 1/8 (283)	13 1/4 (335)
C = RAD	2 3/4 (70)	3 1/2 (89)	3 7/8 (98)	4 3/8 (111)	5 (125)	5 7/8 (149)	7 1/4 (185)	8 (205)


REGULARLY FURNISHED:
Cast Bronze Nozzle and Flange, Machined Nozzle Slides Over PVC and Cast Iron Pipe.

VARIATIONS:
☐ Bird Screen-BS

OPTIONAL MATERIALS:
☐ Nickel Bronze -NB
☐ Polished Bronze -PB

Figure Number 1775

FUNCTION: Used as a downspout cover on a wall where an overflow roof drain concealed leader discharges rainwater to the ground.

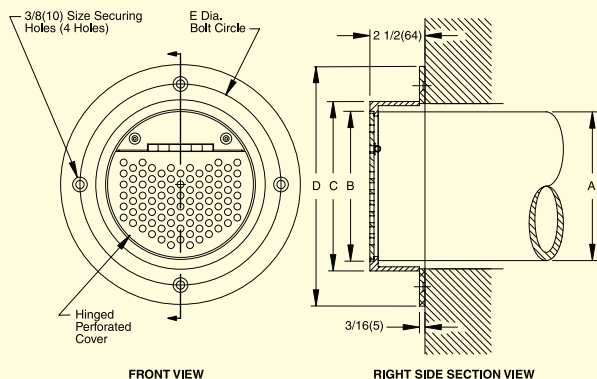

FRONT VIEW

RIGHT SIDE SECTION VIEW

REGULARLY FURNISHED:
Fabricated Type 304 Stainless Steel Downspout Cover with Hinged Perforated Cover.

VARIATIONS:
☐ Vandal Proof -U

OPTIONAL MATERIALS:
☐ Fabricated Polished Brass -PB
☐ Fabricated Chrome Plated Brass -CP

NOTE: Dimensions shown in parentheses are in millimeters.

A (Pipe Size)	B DIA.	C DIA.	D DIA.	E DIA.
0150(38)	3 1/2(89)	4 1/2(115)	7 11/16(194)	6(150)
02(50)	3 1/2(89)	4 1/2(115)	7 11/16(194)	6(150)
03(75)	3 1/2(89)	4 1/2(115)	7 11/16(194)	6(150)
04(100)	4 9/16(116)	5 9/16(142)	8 3/4(220)	7 1/8(181)
05(125)	5 5/8(143)	6 5/8(168)	9 13/16(251)	8 1/4(210)
06(150)	6 11/16(169)	7 11/16(194)	10 7/8(278)	9(230)
08(200)	8 11/16(219)	9 11/16(249)	12 7/8(328)	11 1/4(285)
10(250)	10 13/16(276)	11 13/16(301)	15(380)	13 1/2(345)
12(305)	12 13/16(326)	13 13/16(351)	17(430)	15 1/2(395)
15(380)	16(405)	16 15/16(429)	20 1/8(513)	18 1/2(470)

Fig. 1775.....DOWNSPOUT COVER

For more information on our downspout nozzles, covers, and other products, visit www.jrsmith.com.



JAY R. SMITH MFG. CO.
Member of Acorn's Family of Companies
POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



FAMILY OF COMPANIES

SPM0541
03/11