


PIPE CLAMPS

STANDARD PIPE CLAMP

- PLAIN
- ELECTRO-GALVANIZED

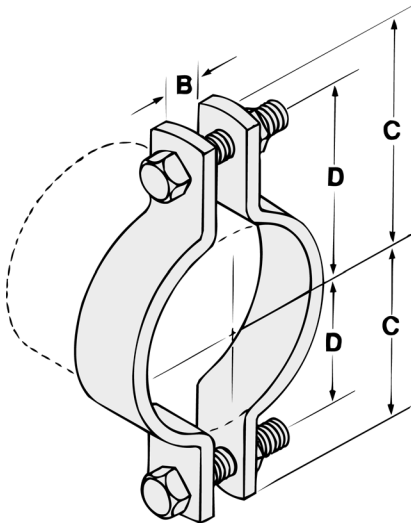

FUNCTION: Designed to be used in the suspension of non-insulated pipe lines. Normally used in conjunction with Fig. 35 weldless eye nut, Fig. 50 eye rod or Fig. 55 welded eye rod to allow flexibility at the rod attachment.

APPROVALS: Complies with Federal Specifications A-A-1192A (Type 4) and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 4).

MATERIAL: Low carbon steel

ORDERING: Specify pipe size and figure number.

*Available in stainless steel.
To order, specify 304 or 316 and
add suffix SS to figure number.
Price on request.

Pipe Size	B	C	D	Bolt Size	Max. Rec. Load/lbs.		Wt. Each (in lbs.)
					650°F	750°F	
1/2	3/8	1 ⁹ / ₁₆	1 ¹ / ₁₆	3/8	500	445	.31
3/4	3/8	1 ³ / ₄	1 ¹ / ₄	3/8	500	445	.35
1	3/8	1 ⁷ / ₈	1 ³ / ₈	3/8	500	445	.39
1 ¹ / ₄	3/8	2 ¹ / ₈	1 ⁵ / ₈	3/8	500	445	.40
1 ¹ / ₂	3/8	2 ¹ / ₄	1 ³ / ₄	3/8	800	715	.45
2	1/2	2 ⁹ / ₁₆	2 ¹ / ₁₆	1/2	1040	930	.90
2 ¹ / ₂	5/8	2 ¹³ / ₁₆	2 ⁵ / ₁₆	1/2	1040	930	1.10
3	5/8	3 ⁵ / ₁₆	2 ¹³ / ₁₆	1/2	1040	930	1.20
3 ¹ / ₂	5/8	3 ¹ / ₂	3 ³ / ₁₆	1/2	1040	930	1.25
4	3/4	4 ¹ / ₈	3 ³ / ₈	5/8	1040	930	1.85
5	3/4	4 ³ / ₄	4	5/8	1040	930	2.05
6	7/8	5 ⁷ / ₈	4 ⁷ / ₈	3/4	1615	1440	5.06
8	1	7	6	3/4	1615	1440	6.08
10	1	8 ¹³ / ₁₆	7 ⁹ / ₁₆	7/8	2490	2220	12.81
12	1	9 ⁷ / ₈	8 ⁷ / ₈	7/8	2490	2220	13.08
14	1 ¹ / ₈	11 ⁵ / ₁₆	9 ¹⁵ / ₁₆	7/8	2490	2220	16.70
16	1 ¹ / ₈	12 ⁵ / ₈	10 ⁷ / ₈	7/8	2490	2220	23.19
18	1 ¹ / ₄	13 ³ / ₈	11 ⁵ / ₈	1	3060	2730	33.12
20	1 ³ / ₈	14 ⁵ / ₁₆	12 ⁹ / ₁₆	1 ¹ / ₈	3060	2730	38.66
24	1 ⁵ / ₈	17 ¹ / ₂	15 ¹ / ₂	1 ¹ / ₄	3060	2730	52.27
30	2	20 ⁷ / ₈	18 ⁵ / ₈	1 ¹ / ₂	4000	3520	105.13