

U-BOLTS

FUNCTION: Designed for use as a support, anchor, or guide for various types of pipe. The PVC coating protects the surface of the pipe from contact with the metal surface of the U-Bolt.

APPROVALS: Complies with Federal Specifications A-A-1192A (Type 24) and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 24).



MATERIAL: Low carbon steel

ORDERING: Specify pipe size and figure number.

STANDARD U-BOLT

- PLAIN
- ELECTRO-GALVANIZED
- PVC COATED
- STAINLESS STEEL


Pipe Size	Rod Size A	B	C	D	Tangent E	Max. Rec. Load/lbs.		Wt. Each (in lbs.)
						650°F	750°F	
1/2	1/4	15/16	13/16	23/8	23/4	580	454	.11
3/4	1/4	11/8	13/8	23/8	23/4	580	454	.12
1	1/4	13/8	15/8	23/8	23/4	580	454	.12
1 1/4	3/8	111/16	21/16	23/8	27/8	1460	1143	.28
1 1/2	3/8	2	23/8	21/2	3	1460	1143	.30
2	3/8	27/16	213/16	21/2	31/4	1460	1143	.33
2 1/2	1/2	215/16	37/16	3	33/4	2700	2114	.73
3	1/2	39/16	41/16	3	4	2700	2114	.78
3 1/2	1/2	41/16	49/16	3	41/4	2700	2114	.84
4	1/2	49/16	51/16	3	41/2	2700	2114	.90
5	1/2	55/8	61/8	3	5	2700	2114	1.01
6	5/8	63/4	73/8	33/4	61/8	4320	3383	2.00
8	5/8	83/4	93/8	33/4	71/8	4320	3383	2.33
10	3/4	107/8	115/8	4	83/8	6460	5059	4.91
12	7/8	127/8	133/4	41/4	95/8	8960	7017	7.73
14	7/8	141/8	15	41/4	101/4	8960	7017	8.30
16	7/8	161/8	17	41/4	111/4	8960	7017	9.20
18	1	181/8	191/8	43/4	125/8	11800	9241	13.50
20	1	201/8	211/8	43/4	135/8	11800	9241	14.60
24	1	241/8	251/8	43/4	155/8	11800	9241	16.90
30	1	301/8	311/8	43/4	185/8	11800	9241	19.10
36	1	361/8	371/8	43/4	215/8	11800	9241	23.20

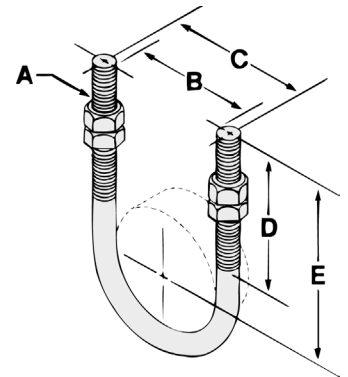

Special U-Bolts are available upon request. Please specify:


- Pipe Size
- Rod Size A
- Length of threads D
- Tangent E
- Finish
- Type of material if other than low carbon steel

SPECIAL U-BOLTS

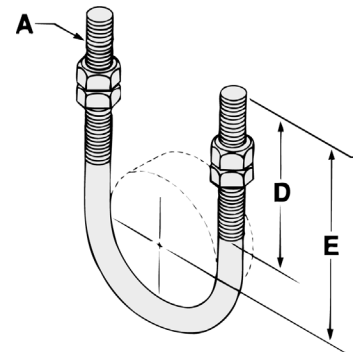

U-BOLTS

LIGHT DUTY U-BOLT

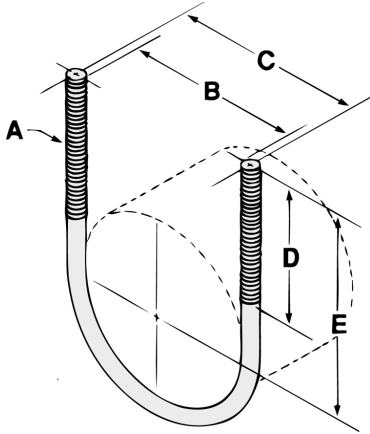

Available in stainless steel. To order, specify 304 or 316 and add suffix SS to figure number.
Price on request.

*Regularly furnished without nuts
unless specified otherwise.*

FUNCTION: Designed for use as a support, anchor, or guide for various types of pipe in light duty applications.

MATERIAL: Low carbon steel

FINISH: Plain or Electro-galvanized

ORDERING: Specify pipe size and figure number. If nuts are required, order separately.

Pipe Size	Rod Size A	B	C	D	Tangent E	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
1/2	1/4	15/16	13/16	13/4	115/16	580	.06
3/4	1/4	11/8	13/8	13/4	21/16	580	.07
1	1/4	13/8	15/8	13/4	23/16	580	.07
1 1/4	1/4	111/16	115/16	13/4	23/8	580	.08
1 1/2	1/4	2	21/4	13/4	27/16	580	.09
2	1/4	27/16	211/16	13/4	211/16	580	.10
2 1/2	3/8	215/16	35/16	2	31/16	1460	.28
3	3/8	39/16	315/16	2	33/8	1460	.31
3 1/2	3/8	41/16	47/16	2	35/8	1460	.35
4	3/8	49/16	415/16	2	37/8	1460	.38
5	3/8	55/8	6	21/4	49/16	1460	.45
6	1/2	63/4	71/4	21/4	51/16	2700	.95
8	1/2	83/4	91/4	21/4	61/16	2700	1.20
10	5/8	107/8	111/2	21/2	71/4	4320	2.30