



**Archer®**  
60" x 30" alcove bath, left drain  
**K-1946-LA**

### Features

- Comfort Depth® design offers a convenient 19" step-over height while retaining the same depth as a standard 21" bath
- Integral lumbar support
- Slotted overflow allows for deep soaking
- Integral apron
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Textured bottom surface
- Coordinates with other products in the Archer collection

### Material

- Acrylic

### Installation

- Left drain
- Alcove

### Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

### Recommended Products/Accessories

K-23726 Drain treatment



**ADA**

### Codes/Standards

CSA B45.5/IAPMO Z124

UL 1795

ADA

ICC/ANSI A117.1





UL Listed

### KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color   | Code | Description  |
|---|------|--------------|
|  | 0    | White        |
|  | 96   | Biscuit      |
|  | 95   | Ice™ Grey    |
|  | 7    | Black Black™ |

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.


For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

9-18-2025 21:25 - US/CA




THE BOLD LOOK  
OF **KOHLER®**



**Archer®**  
60" x 30" alcove bath, left drain  
**K-1946-LA**

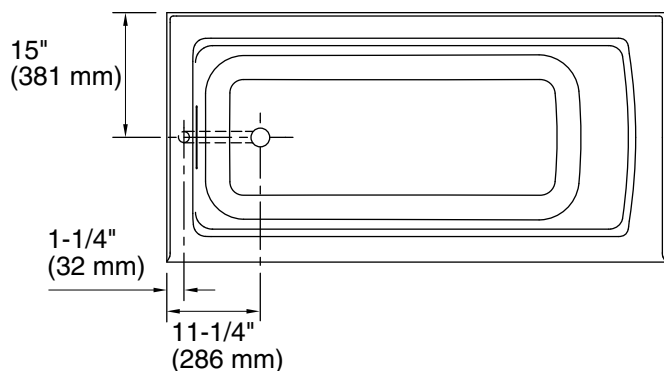

No change in measurements if connected with drain illustrated. (K-7272)

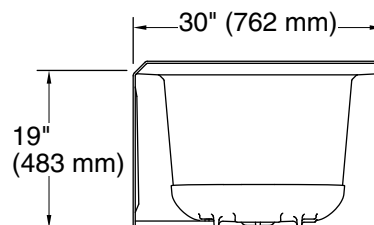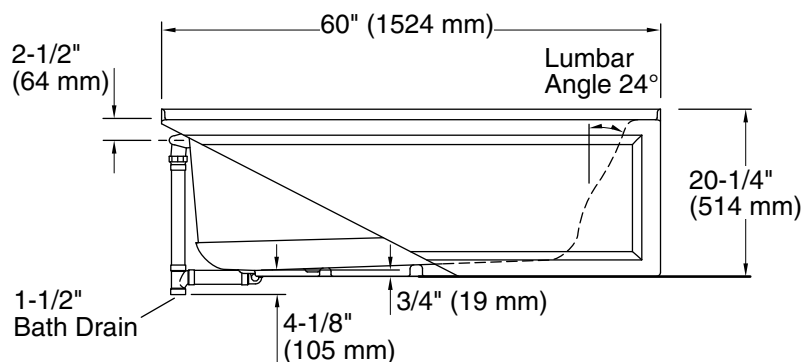

### Technical Information

All product dimensions are nominal.

|                        |   |
|------------------------|---|
| Drain location:        | Left  |
| Basin area, bottom:    | 45-1/8" x 19-11/16" (1146 mm x 500 mm)            |
| Basin area, top:       | 52-1/8" x 22-1/16" (1324 mm x 560 mm)             |
| Weight:                | 73 lbs (33.1 kg)                                  |
| Minimum floor load:    | 46 lbs/ft <sup>2</sup> (224.6 kg/m <sup>2</sup> ) |
| Water depth:           | 15-1/8" (384 mm)                                  |
| Water capacity:        | 57 gal (215.8 L)                                  |
| Minimum flat for door: | 2-9/16" (66 mm)                                   |

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.